



F系列平行轴斜齿减速器


F SERIES PARALLEL SHAFT HELICAL GEAR MOTOR




FAB型 Model FAB
底脚空心轴安装平行轴斜齿轮减速机
Foot-mounted parallel shaft helical gear
reducer with hollow shaft




FF型 Model FF
B5法兰安装平行轴斜齿轮减速机
Parallel shaft helical gear reducer in B5
flange-mounted version




FAF型 Model FAF
B5法兰空心轴安装平行轴斜齿轮减速机
Parallel shaft helical gear reducer in B5 flange-mounted
version with hollow shaft




FAZ 型 Model FAZ
小法兰空心轴安装平行轴斜齿轮减速机
Short-flange mounted parallel shaft helical gear
reducer with hollow shaft



F..R型 Model F..R
F系列与 R..7系列组合减速机
Combination of F series reducer and
R..7 series reducer



F..S型 Model F..S
输入轴型，即配输入轴不配电动机的平行轴斜齿轮减速机
Input-shaft style, in another word, parallel shaft helical gear
reducer equipped with input shaft but without the motor

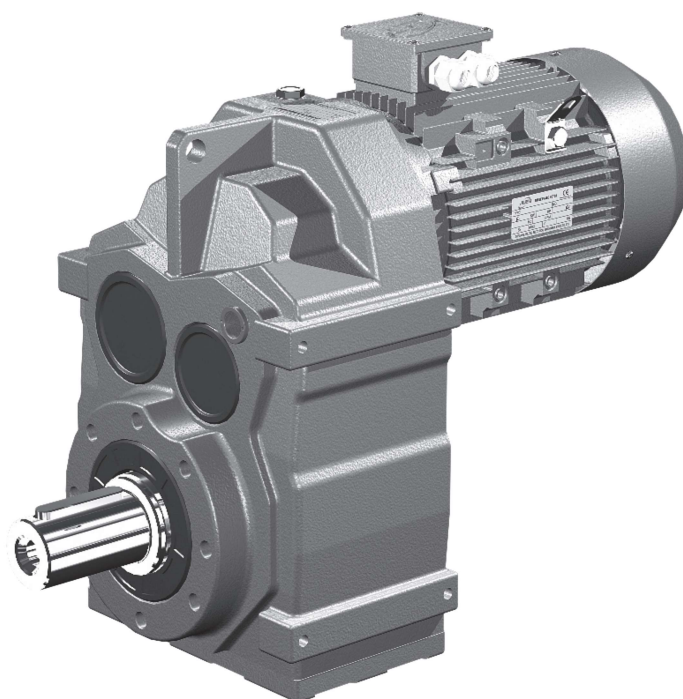

F型 Model F
底脚安装平行轴斜齿轮减速机
Foot-mounted parallel shaft helical gear reducer

上海承禹机电设备有限公司

一、性能特点 Characteristics:

1. 承禹减速机是在模块组合体系的基础上设计的, 可以方便地配用各种型式的电动机或采用其它动力输入。同种机型可配用多种功率的电动机。容易实现各种机型之间的组合联接。
2. 传动效率高, 单机型减速机效率高达96%。
3. 传动比划分细, 范围广。组合机型可以形成较大的传动比, 输出转速低。
4. 安装形式多样: 可任意底脚、B5法兰或B14 法兰安装, 底脚安装减速机有两个机加工的底脚安装平面。
1. chengyureductors are based on the building block design, so it's convenient for them to fit all types of motors or to connect with other power input. The same type of reducers can fit motors with different power, so that it's possible for different types of machines to combine or connect.
2. High transmission efficiency. A single machine can reach a transmission efficiency as much as 96%.
3. Precise division of transmission ratio with a wide range. The combination of machines can produce a larger transmission ratio at a low output rotational speed.
4. Various ways of installation. Horizontal installation at any position or flanged installation, The bottom feet installs the machine that deceleration machine have two bottom feet processes to install the flat surface.

二、场所条件 Working Environment:

1. 环境温度-40℃~50℃。(0℃以下启动时润滑油要加热到0℃以上。)
2. 海拔不超过1000米。
3. 输入转速不大于1800rpm, 齿轮最高圆周速度不超过22m/s。
4. 可用于正反转。
5. 无行业限制。
6. 其他条件下使用请与我公司技术部联系。
1. Working temperature: -40℃~50℃ (The lubrication should be heated until above 0℃ if the machine works Below 0℃.)
2. The working place should be lower than 1,000 meters above sea level.
3. The input rotational speed should not exceed 1,800r/m. The circumferential speed of the gear should not exceed 20m/s.
4. Suitable for normal-reverse rotation.
5. Without industry limitation.
6. Please consult our technical supporting department for other circumstances.

三、选型指南 Instructions for Selection:

在确定使用系数之前必须先确定一天的运行小时数, 每小时的起停次数和负载类型。其中负载类型按下列公式计算:

The daily operating time, the starting frequency and the load classifications be determined before deciding the service factor. The load classifications is calculated with the following formula:

负载类型 Load classification

- I 均匀负载, 惯性加速系数 ≤ 0.2
II 中等冲击负载, 惯性加速系数 ≤ 3
III 强烈冲击负载, 惯性加速系数 ≤ 10
Uniform load, mass acceleration factor ≤ 0.2
Medium Impact Load, mass acceleration factor ≤ 3
Heavy shock Load, mass acceleration factor ≤ 10
如果惯性加速系数 > 10 , 请与我公司技术部联系。

$$\text{惯性加速系数} = \frac{\text{所有外部转动惯量}}{\text{驱动电机的转动惯量}}$$

实际的工况系数 f_A 必须满足下式: 使用系数 $f_B \geq$ 工况系数 f_A

使用系数 f_B 已在后面的选型参数表中列出。

允许的轴伸径向载荷及轴向载荷

输出轴端允许的径向载荷及轴向载荷资料, 请与我公司技术部联系。

减速机的使用与维护请参阅随机附带的《减·变速机使用说明书》。

Please contact our technical supporting department in case the mass acceleration factor > 10 .

$$\text{Mass acceleration factor} = \frac{\text{All external mass moments of Inertia}}{\text{Mass moment of inertia on the motor end}}$$


The actual operating mode factor (f_A) should meet the following formula: Service factor $f_B \geq$ operating mode factor f_A

The service factor f_B is listed in the parameter selection list.


The permitted overhung loads and the axial forces.

Please contact our technical supporting department for the information on the permitted overhung loads and the axial forces at the output end of the shaft.

Regarding the use and maintenance of the reducer, please refer to the attached Instruction Manual of the Reductor and the Variable Speed Motor.

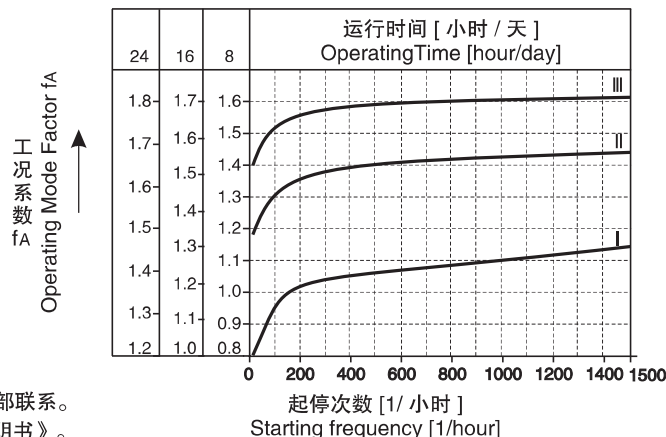

F系列结构图:/ Fseries structrue drawing:

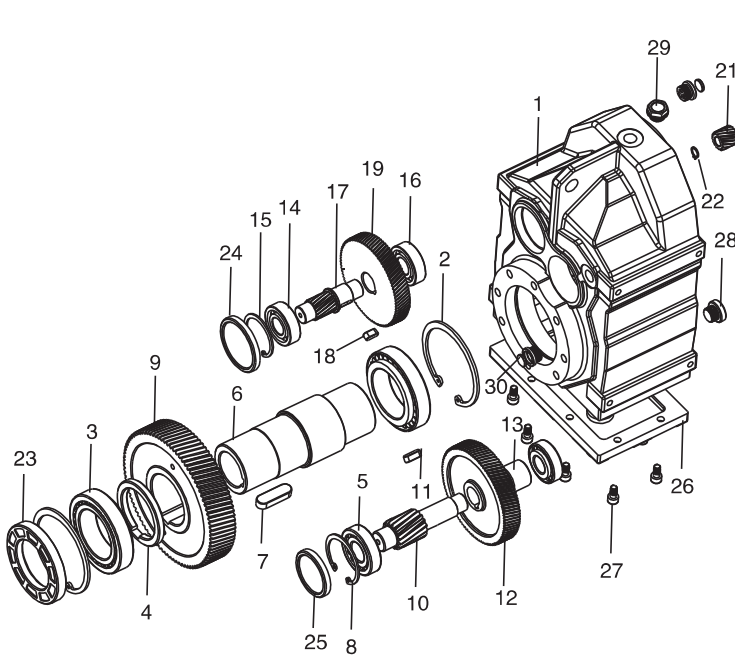

- 1 箱体 Housing
- 2 孔用挡圈 Circlip for hole
- 3 轴承 Bearing
- 4 垫圈 Washer
- 5 轴承 Bearing
- 6 空出轴 Output shaft
- 7 平键 Key
- 8 孔用挡圈 Circlip for hole
- 9 输出大齿轮 First-stafe big gear
- 10 三级齿轮轴 Second-stage gear shaft
- 11 平键 Key
- 12 二级大齿轮 Second-stage big gear
- 13 轴套 Shaft sleeve
- 14 轴承 Bearing
- 15 孔用挡圈 Circlip for hole
- 16 轴承 Bearing
- 17 二级齿轮轴 Second-stage gear shaft
- 18 平键 Key
- 19 一级大齿轮 First-stage big gear
- 21 一级小齿轮 First-stage big gear
- 22 轴用挡圈 Circlip for shaft
- 23 油封 Oil seal
- 24 封盖 Grand
- 25 封盖 Grand
- 26 下端盖 Cover plate
- 27 螺栓 Bolt
- 28 通气帽 Breather
- 29 通气帽 Breather
- 30 油镜 Oil gauge


F系列平行轴斜齿轮减速器型号规格及机型表示方法:

本系列减速器的型号规格有: F(37、47、57、67、77、87、97、107、127、157) 等10种, 减速比有4.07~205等多种速比, 可分别配置0.18~132KW。

Type,specification and model notation for F series parallel shaft bevel gear speed reducers.:

Types,specifications of this series speed reducer have 10 kinds including F 37、47、57、67、77、87、97、107、127、157 etc, speed reducing ratio:4.07 ~ 205, which can be allocated to 0.18 ~ 132kW.

五、型号说明 Instructions for Models:

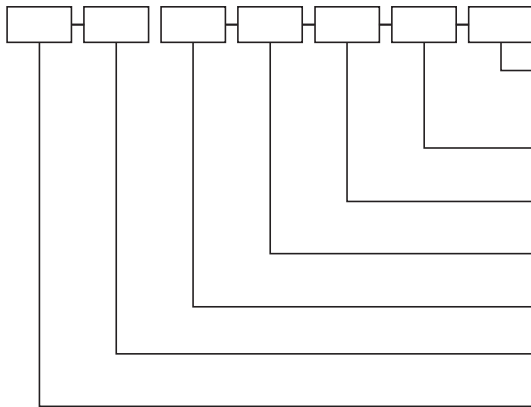

电机接线盒方向(角度)
The direction (angle) of the motor connection box

安装形式
Mounting position

传动比
Ratio


电机极数
Motor pole

电机功率
Motor power

电机类型代号
The codes for motor types

减速机结构形式和规格
The mounting type of the reductor and Specifications

例:

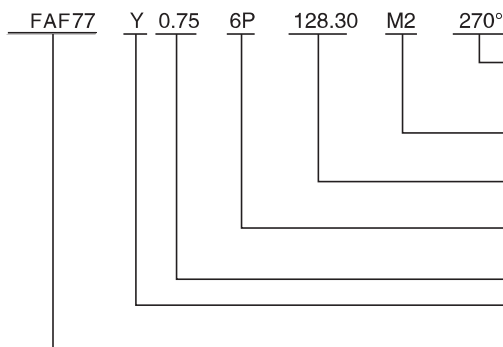

电机接线盒在图示270° 处
The motor connecting box is at the position of 270° in the mounting postion example.

安装形式: M2
Mounting position: M2

传动比: 128.30
Ratio:128.30

6极
Poles 6

0.75kW

Y系列电机
Motors of Y series

FAF型77规格
Specifications 77 for model FAF

上海承禹机电设备有限公司

注：1.输入轴型没有电动机的各项内容。

2.无特别说明时Y系列电动机供货按IP54防护等级。

3.不注明安装形式时，按安装形式图中M1安装形式供货。

4.不注明接线盒角度时，按安装形式图中0度位置供货。

5.对输出旋转方向与输入旋转方向有特殊要求的用户，请与我公司技术部联系。

6.电机尺寸请查看电机外型尺寸表。

Note:1. The input-shaft style is not equipped with any motor

2. Motors of Y series are supplied with protection grade of IP54 unless otherwise specified.

3. The mounting position of M1 as shown in the mounting position example is the default way when supplying unless otherwise specified.

4. 0° as shown in the mounting position example is the default connection box angle when supplying unless otherwise specified.

5. Please contact our technical supporting department in case there's any special requirements on the output and input rotatory directions.

6. About Motor size, please check table of motor's dimensions.

六、电机类型代号 Codes for Motor Types:

Y系列 Y series	Y	防爆电机 Flame-proof Motor	YB	直流电机 Direct Current Motor	Z
制动电机 Brake Motor	YEJ	辊道电机 Roll Motor	YG	变频电机 Variable Frequency Motor	YVP

七、联接法兰L2长度 Length of Connect Flange L2

F.系列平行轴斜齿轮减速机联接法兰L2长度表

The form on length of the connect flange L2 of the parallel shaft helical gear reductor of WF.. series

电机机座号 Motor frame size 减速机型号 Reductor type	63	71	80	90	100	112	132	160	180	200	225	250	280	315
F..37	61.5	61.5	80	80	98	—	—	—	—	—	—	—	—	—
F..47	61.5	61.5	80	80	98	—	—	—	—	—	—	—	—	—
F..57	56	56	74.5	74.5	90.5	90.5	—	—	—	—	—	—	—	—
F..67	56	56	74.5	74.5	90.5	90.5	123	—	—	—	—	—	—	—
F..77	50	50	68.5	68.5	82.5	82.5	111	152.5	—	—	—	—	—	—
F..87	—	—	63.5	63.5	78.5	78.5	106	147.5	147.5	—	—	—	—	—
F..97	—	—	—	57.5	72.5	72.5	101	142.5	142.5	144.5	—	—	—	—
F..107	—	—	—	—	66.5	66.5	95	136.5	136.5	138.5	168.5	—	—	—
F..127	—	—	—	—	—	—	80	121.5	121.5	123.5	153.5	153.5	153.5	—
F..157	—	—	—	—	—	—	—	113.5	113.5	115.5	145.5	145.5	145.5	175.5


八、安装形式图释义 Explanation of mounting position example

 通气孔 Breather valve	 油位孔 Oil level plug	 放油孔 Oil drain plug
---	---	---

九、选型参数表释义 Explanation of Parameter Selection List

电机功率 Power (kW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (i)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
0.75	4.5	1603	203.70	0.89	F 77	6P	99
	4.8	1500	190.60	0.95	FA 77	6P	110
	5.4	1325	168.40	1.08	FF 77	6P	96
	6.4	1120	142.30	1.27	FAF77	6P	102
	7.1	1010	128.30	1.41			

F系列安装方位图/ F series installation direction diagram

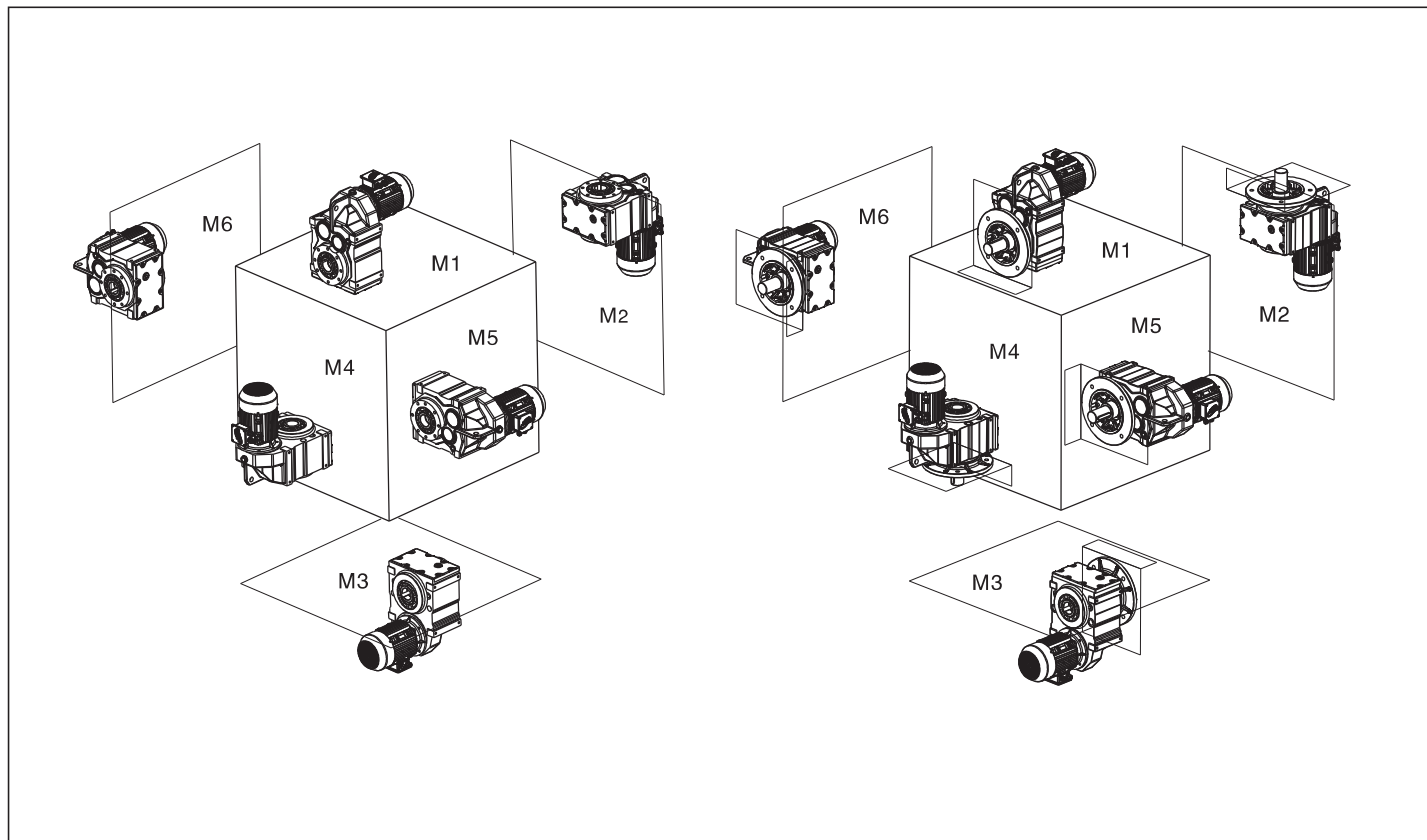

F系列油量表(单位kg) / F series oil capacity table (Unit:kg)

安装方位 机型号	M1	M2	M3	M4	M5	M6
F37	1	1.2	0.7	1.2	1	1.1
F47	1.5	1.8	1.1	1.9	1.5	1.7
F57	2.5	3.6	2	3.4	2.7	2.8
F67	2.7	3.8	2.1	3.9	2.9	3.2
F77	5.1	7.3	4.4	8.2	6.1	6.3
F87	9.3	12	7.1	12.8	10	10.2
F97	20.8	25.3	14.2	28.4	20.8	22.5
F107	26	32	20	39	28	29
F127	42	56	34	65	46	49
F157	72	103	65	104	85	80

F系列重量表 / F SERIES WEIGHT TABLE

机型号/Type	F37	F47	F57	F67	F77	F87	F97	F107	F127	F157
重量kg/Weight kg	13	16.5	27	31	55	100	170	260	400	700



注：表中重量为不加油时重量，带输入轴、输入法兰另加10%；带电机根据所配规格另加。

Note: Weight in the table means the weight when oil is not added. When input shaft is furnished, 10% weight should be added; If there is a motor, please add weight according to motor type.

上海承禹机电设备有限公司



F/ FAB37-157 安装形式图

F/ FAB37-157 Mounting position example

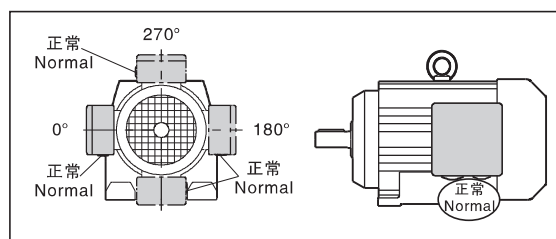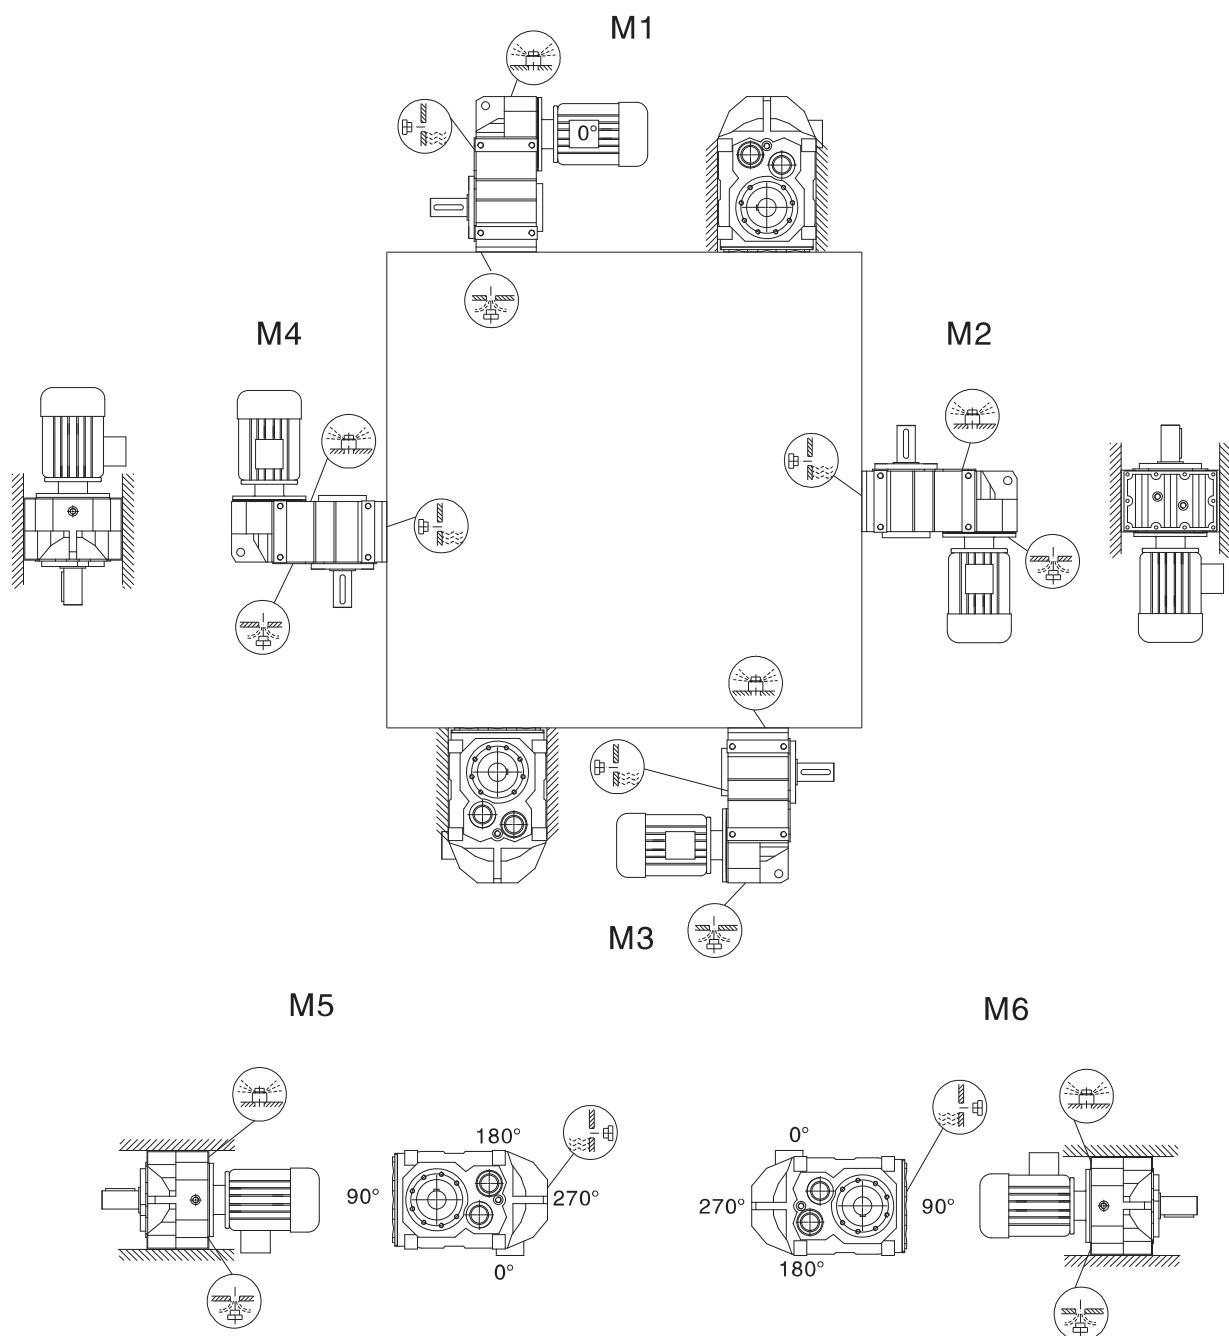



F/ FAT37-157 安装形式图

F/ FAT37-157 Mounting position example

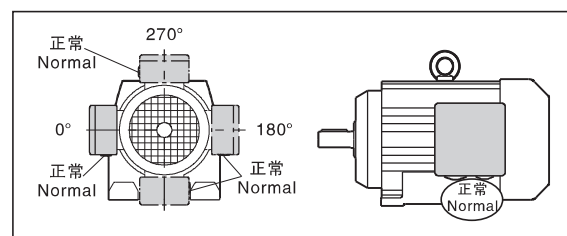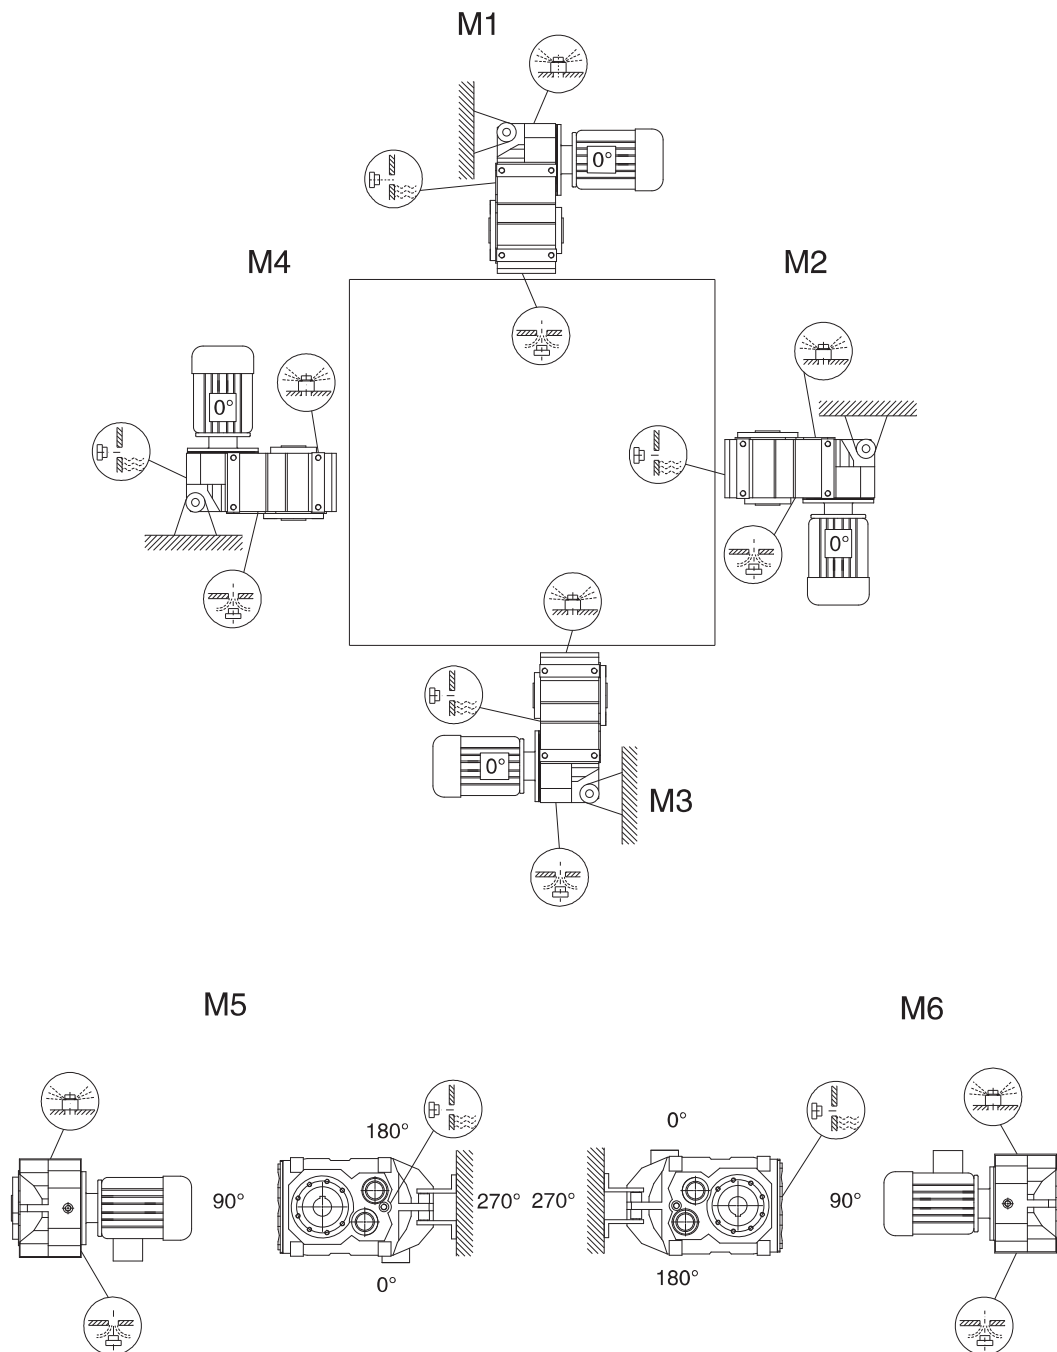

上海承禹机电设备有限公司

FF/ FAF/ FAZ 37-157安装形式图 FF/ FAF/ FAZ 37-157 Mounting position example

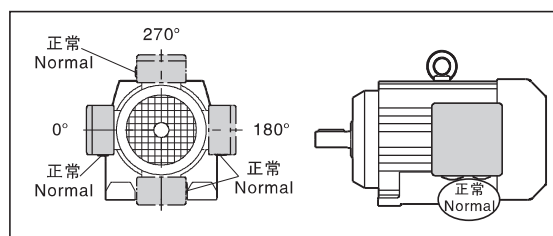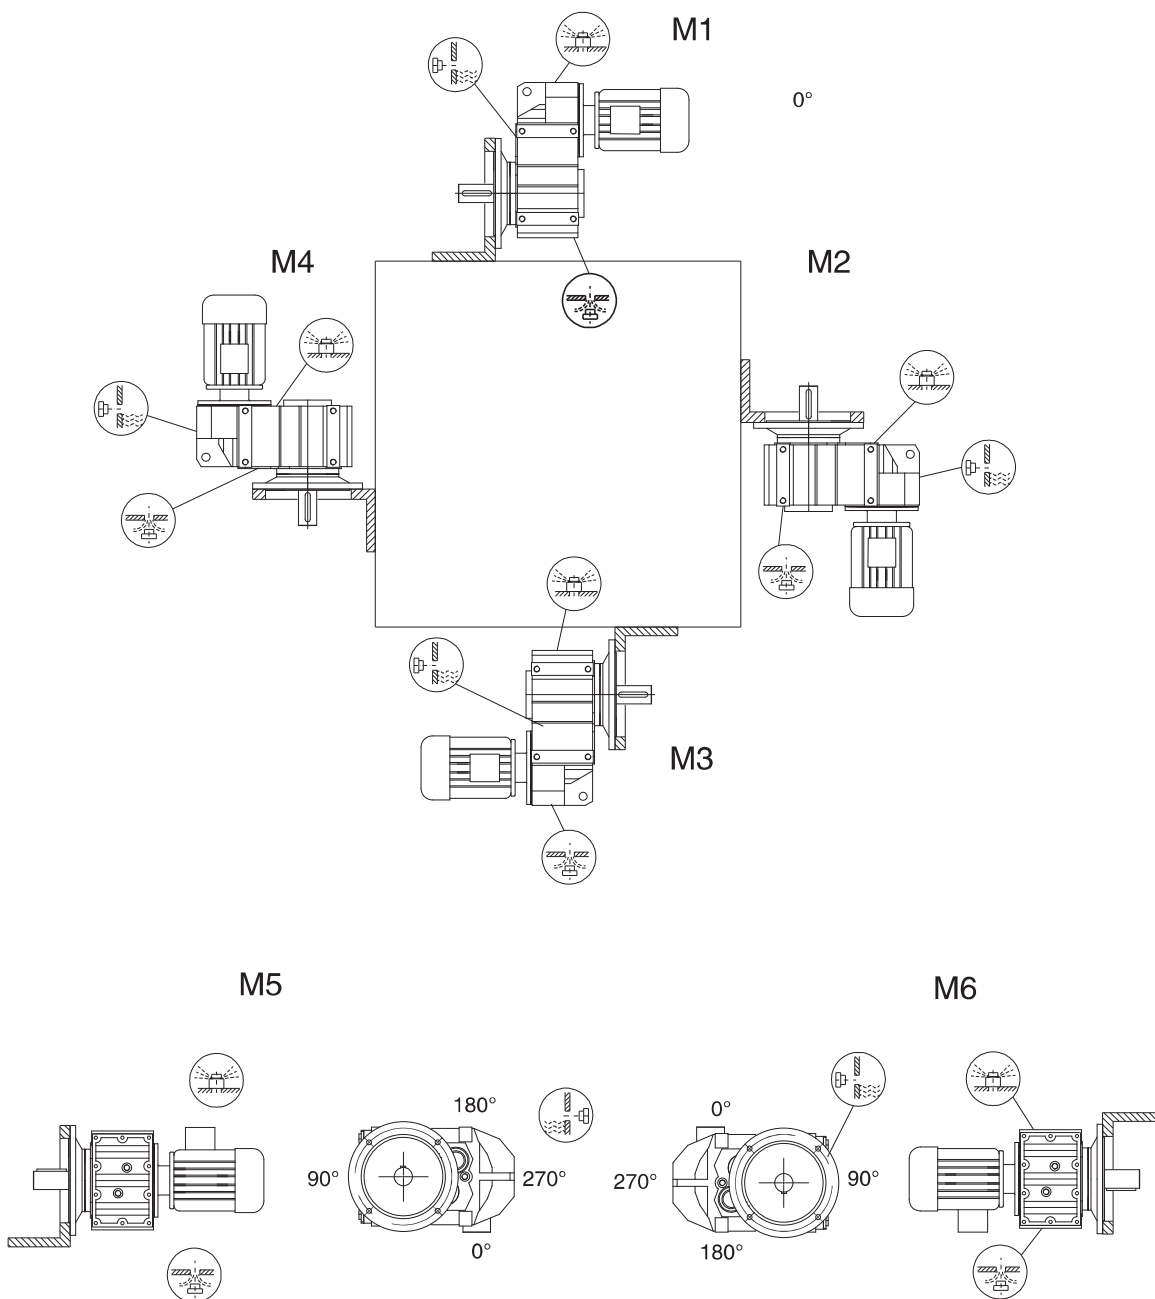

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole
0.12KW						0.12KW					
0.06	15000	22323	0.80	FA 127 R77 FAF127 R77 F 127 R77 FF 127 R77	4P	2.5	370	558	1.60	FA 57 R37 FAF57 R37 F 57 R37 FF 57 R37	4P
0.07	12600	19048	0.95			2.7	330	506	1.80		
0.08	10800	16656	1.10			3.0	285	452	2.1		
0.09	9870	14722	1.20			3.2	295	426	2.0		
0.11	7980	12912	1.50			3.6	260	382	2.3		
0.12	7090	11656	1.70			4.2	225	330	2.7		
0.14	6300	10191	1.90			4.6	200	298	3.0		
						5.3	177	262	3.4		
0.09	9590	14767	0.80	FA 107 R77 FAF107 R77 F 107 R77 FF 107 R77	4P	2.2	425	622	0.95	FA 47 R17 FAF47 R17 F 47 R17 FF 47 R17	4P
0.12	7610	11348	1.00			2.5	370	543	1.10		
0.14	5890	10039	1.30			2.9	320	475	1.25		
0.16	4880	8548	1.55			3.3	280	419	1.45		
0.18	4740	7674	1.60			2.6	365	524	1.10		
0.20	4120	6767	1.85			2.8	340	489	1.20		
0.23	3530	5954	2.2			3.2	290	427	1.35		
0.26	3070	5223	2.5			3.6	260	381	1.55		
0.30	2890	4567	2.7			4.1	225	334	1.75		
0.39	2140	3521	3.6			4.7	198	295	2.0		
						5.4	166	253	2.4		
0.19	4800	7328	0.90	FA 97 R57 FAF97 R57 F 97 R57 FF 97 R57	4P	4.3	210	322	0.95	FA 37 R17 FAF37 R17 F 37 R17 FF 37 R17	4P
0.21	4040	6469	1.05			5.0	184	278	1.10		
0.25	3680	5615	1.15			5.7	157	242	1.30		
0.28	3200	4961	1.35			6.2	149	221	1.35		
0.32	2800	4333	1.55			4.2	225	326	0.90		
0.35	2550	3906	1.70			4.8	195	285	1.05		
0.41	2210	3352	1.95			5.5	170	250	1.20		
0.47	1820	2907	2.4	FA 87 R57 FAF87 R57 F 87 R57 FF 87 R57	4P	6.3	150	219	1.35	FA 67 R17 FAF67 R17 F 67 R17 FF 67 R17	4P
0.54	1670	2553	2.6			7.4	127	186	1.60		
						8.3	114	167	1.75		
0.28	3250	4954	0.90			3.9	290	228.99	2.8	FA 57 R17 FAF57 R17 F 57 R17 FF 57 R17	4P
0.33	2690	4245	1.00			4.6	250	195.39	3.3		
0.37	2200	3721	1.35			5.3	220	170.85	3.8		
0.43	2140	3244	1.40			5.6	205	162.31	4.0		
0.48	1900	2881	1.60			6.3	181	142.40	4.5		
0.54	1700	2576	1.75			4.5	255	199.70	2.4		
0.63	1440	2199	2.1			4.9	235	183.60	2.6		
0.72	1240	1930	2.4	FA 77 R37 FAF77 R37 F 77 R37 FF 77 R37	4P	5.7	200	157.09	3.0	FA 47 R17 FAF47 R17 F 47 R17 FF 47 R17	6P
0.81	1120	1709	2.7			6.6	173	136.16	3.5		
0.92	980	1493	3.0			7.1	162	127.27	3.7		
1.1	785	1300	3.8			6.9	166	199.70	3.6		
1.2	710	1148	4.2			7.5	153	183.60	3.9		
						8.8	130	157.09	4.6		
						10	113	136.16	5.3		
0.53	1750	2613	0.85	FA 67 R37 FAF67 R37 F 67 R37 FF 67 R37	4P	4.7	245	190.76	1.65	FA 37 R17 FAF37 R17 F 37 R17 FF 37 R17	6P
0.60	1520	2284	1.00			5.1	225	175.38	1.80		
0.68	1340	2029	1.10			6.0	191	150.06	2.1		
0.80	1130	1728	1.35			6.9	166	130.07	2.4		
0.89	1040	1544	1.45			7.4	155	121.57	2.6		
1.0	910	1354	1.65			8.6	134	105.09	3.0		
1.1	810	1200	1.85			10	114	89.29	3.5		
1.3	710	1053	2.1			11	102	79.72	3.9		
1.5	605	910	2.5			7.2	158	190.76	2.5	FA 47 R37 FAF47 R37 F 47 R37 FF 47 R37	4P
1.7	501	810	2.9			7.9	146	175.38	2.8		
1.9	445	710	3.4			9.2	125	150.06	3.2		
						11	108	130.07	3.7		
						7.0	164	128.51	1.20		
0.97	920	1429	0.90	FA 57 R37 FAF57 R37 F 57 R37 FF 57 R37	4P	7.6	150	117.88	1.35	FA 37 R17 FAF37 R17 F 37 R17 FF 37 R17	6P
1.1	830	1271	1.00			9.0	128	100.36	1.55		
1.2	700	1102	1.15			10	110	86.53	1.80		
1.4	615	970	1.35			11	103	80.65	1.95		
1.6	540	858	1.50								
1.8	475	755	1.75								
2.2	405	641	2.0								
2.4	375	572	2.2								
2.7	320	509	2.6								
3.2	275	437	3.0								

上海承禹机电设备有限公司

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole
0.12KW						0.18KW					
11	107	128.51	1.85			0.46	3160	2881	0.95		
12	98	117.88	2.0			0.51	2820	2576	1.05		
14	83	100.36	2.4			0.60	2400	2199	1.25		
16	72	86.53	2.8			0.68	2080	1930	1.45	FA 87	R57
17	67	80.65	3.0			0.77	1860	1709	1.60	FAF87	R57
20	59	70.50	3.4			0.88	1640	1493	1.85	F 87	R57
21	55	66.09	3.6			1.0	1350	1300	2.2	FF 87	R57
24	48	58.32	4.1			1.1	1210	1148	2.5		
25	45	54.54	4.4			1.3	1050	1010	2.9		
27	43	51.70	4.7			1.5	940	887	3.2		
29	39	47.02	5.1			1.7	810	780	3.7		
31	36	43.83	5.5								
36	32	38.31	6.3			0.76	1880	1728	0.80		
38	30	35.91	6.7			0.86	1710	1544	0.90		
44	26	31.69	7.6			0.98	1500	1354	1.00		
49	23	28.09	8.6			1.1	1330	1200	1.15	FA 77	R37
58	20	23.88	10			1.2	1170	1053	1.30	FAF77	R37
58	20	23.63	10	FA 37		1.5	1000	910	1.50	F 77	R37
67	17	20.57	12	FAF37	4P	1.6	860	810	1.75	FF 77	R37
72	16	19.27	13	F 37		1.9	755	710	2.0		
81	14	17.03	14	FF 37		2.2	670	615	2.2		
87	13	15.81	15								
96	12	14.33	17			1.5	910	858	0.90		
107	11	12.87	19			1.8	800	755	1.00		
125	9.2	11.08	21			2.1	685	641	1.20		
132	8.7	10.42	21			2.3	625	572	1.30		
154	7.4	8.97	24			2.6	540	509	1.50		
186	6.2	7.44	23			3.0	470	437	1.75	FA 67	R37
205	5.6	6.74	25			3.4	420	384	1.95	FAF67	R37
228	5.0	6.05	27			2.6	560	500	1.45	F 67	R37
265	4.3	5.21	29			2.9	510	454	1.60	FF 67	R37
282	4.1	4.90	29			3.4	440	392	1.85		
327	3.5	4.22	31			4.0	370	333	2.2		
						4.4	325	297	2.5		
						5.1	285	261	2.9		
						5.6	260	238	3.2		
						6.6	215	200	3.8		
0.18KW											
0.10	13500	12912	0.90			2.4	615	558	1.00		
0.11	12100	11656	1.00	FA 127	R77	2.6	550	506	1.10		
0.13	10700	10191	1.10	FAF127	R77	2.9	485	452	1.25		
0.15	8980	8831	1.35	F 127	R77	3.4	415	386	1.45		
0.17	7770	7643	1.55	FF 127	R77	3.9	360	338	1.65		
0.20	7150	6715	1.70			3.1	485	426	1.25	FA 57	R37
						3.5	430	382	1.40	FAF57	R37
0.15	8560	8548	0.90			4.0	370	330	1.60	F 57	R37
0.17	8050	7674	0.95			4.4	335	298	1.80	FF 57	R37
0.20	7030	6767	1.10	FA 107	R77	5.0	295	262	2.0		
0.22	6090	5954	1.25	FAF107	R77	5.8	250	226	2.4		
0.25	5310	5223	1.45	F 107	R77	6.6	215	200	2.8		
0.26	4860	4567	1.60	FF 107	R77						
0.37	3660	3521	2.1			3.6	400	370	1.00		
0.43	2170	3037	2.4			4.1	365	324	1.10		
0.48	2880	3756	2.7			4.6	315	288	1.25		
0.56	2470	2369	3.1			5.3	270	249	1.50		
0.64	2160	2068	3.6			4.0	375	334	1.05	FA 47	R17
						4.5	330	295	1.20	FAF47	R17
						5.2	280	253	1.45	F 47	R17
						6.1	245	217	1.60	FF 47	R17
						7.0	215	190	1.85		
						7.4	200	178	2.0		
0.30	4660	4333	0.90			7.1	210	186	0.95	FA 37	R17
0.34	4260	3906	1.00			7.9	188	167	1.05	FAF37	R17
0.39	3670	3352	1.15			9.1	166	145	1.20	F 37	R17
0.45	3100	2907	1.40			10	146	129	1.35	FF 37	R17
0.52	2790	2553	1.55	FA 97	R57						
0.59	2450	2245	1.75	FAF97	R57						
0.67	2130	1970	2.0	F 97	R57						
0.77	1890	1722	2.3	FF 97	R57						
0.86	1670	1527	2.6								
0.99	1380	1327	3.1								
1.1	1280	1171	3.3								

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole		
0.18KW						0.18KW							
3.1	555	281071	2.7	FA 77	6P	103	17	12.87	12	FA 37 FAF37 F 37 FF 37	4P		
3.3	520	262.93	2.9	FAF77		119	14	11.08	13				
3.8	445	225.79	3.4	F 77		127	14	10.42	14				
				FF 77		147	12	8.97	15				
						178	9.7	7.44	15				
3.8	450	228.99	1.80	FA 67	6P	196	8.8	6.74	16	FA 37 FAF37 F 37 FF 37	4P		
4.4	385	195.39	2.1	FAF67		218	7.9	6.05	17				
5.1	340	170.85	2.4	F 67		253	6.8	5.21	18				
				FF 67		269	6.4	4.90	19				
						313	5.5	4.22	20				
5.8	300	228.99	2.8	FA 67	4P	0.25KW							
6.8	255	195.39	3.2	FAF67		0.15	13300	8831	0.90	FA 127 FAF127 F 127 FF 127	R77 R77 R77 R77		
7.7	225	170.85	3.7	F 67		0.17	11500	7643	1.05				
				FF 67		0.19	10400	6715	1.15				
						0.22	9190	5925	1.30				
					0.25	7860	5153	1.55					
4.4	395	199.70	1.50	FA 57 FAF57 F 57 FF 57	6P	0.29	6850	4533	1.75	FA 107 FAF107 F 107 FF 107	R77 R77 R77 R77		
4.7	365	183.60	1.65			0.22	9000	5954	0.85				
5.5	310	157.09	1.95			0.25	7860	5223	1.00				
6.4	270	136.16	2.2			0.28	7090	4567	1.10				
6.8	250	127.27	2.4			0.37	5370	3521	1.45				
7.9	215	110.01	2.8	FA 57 FAF57 F 57 FF 57	4P	0.43	4680	3037	1.65	FA 107 FAF107 F 107 FF 107	R77 R77 R77 R77		
6.6	260	199.70	2.3			0.47	4240	2756	1.80				
7.2	240	183.60	2.5			0.55	3650	2369	2.1				
8.4	205	157.09	2.9			0.63	3180	2068	2.4				
9.7	177	136.16	3.4			0.81	2440	1597	3.2				
10	166	127.27	3.6	FF 57	0.93	2110	1401	3.6	FA 97 FAF97 F 97 FF 97	R57 R57 R57 R57			
4.6	375	190.79	1.05	FA 47 FAF47 F 47 FF 47	6P	0.45	4530	2907			0.95		
5.0	345	175.38	1.15			0.51	4050	2553			1.05		
5.8	295	150.06	1.35			0.58	3560	2245			1.20		
6.7	255	130.07	1.55			0.66	3100	1970			1.40		
7.2	240	121.57	1.65			0.75	2740	1722	1.55				
6.9	250	190.76	1.60	FA 47 FAF47 F 47 FF 47	4P	0.85	2430	1527	1.75	FA 97 FAF97 F 97 FF 97	R57 R57 R57 R57		
7.5	230	175.38	1.75			0.98	2040	1327	2.1				
8.8	195	150.06	2.0			1.1	1860	1171	2.3				
10	169	130.07	2.4			1.3	1630	1022	2.6				
11	158	121.57	2.5										
7.4	235	117.88	0.85	FA 37 FAF37 F 37 FF 37	6P	0.67	3040	1930	1.00	FA 87 FAF87 F 87 FF 87	R57 R57 R57 R57		
8.7	198	100.36	1.00			0.76	2710	1709	1.10				
10	171	86.53	1.15			0.87	2380	1493	1.25				
11	159	80.65	1.25			1.0	1990	1300	1.50				
12	139	70.50	1.45			1.1	1780	1148	1.70				
				FA 37 FAF37 F 37 FF 37	4P	1.3	1550	1010	1.95	FA 77 FAF77 F 77 FF 77	R37 R37 R37 R37		
10	167	128.51	1.20			1.5	1370	887	2.2				
11	154	117.88	1.30			1.7	1200	780	2.5				
13	131	100.36	1.55			1.9	1020	674	2.9				
15	113	86.53	1.75			1.2	1690	1053	0.90				
16	105	80.65	1.90	FA 37 FAF37 F 37 FF 37	4P	1.4	1450	910	1.05	FA 67 FAF67 F 67 FF 67	R37 R37 R37 R37		
19	92	70.50	2.2			1.6	1260	810	1.20				
20	86	66.09	2.3			1.8	1110	710	1.35				
23	76	58.32	2.6			2.1	970	615	1.55				
24	71	54.54	2.8			2.4	850	538	1.75				
26	67	51.70	3.0	FA 37 FAF37 F 37 FF 37	4P	2.7	760	480	2.0	FA 67 FAF67 F 67 FF 67	R37 R37 R37 R37		
28	61	47.02	3.3			3.2	645	413	2.3				
30	57	43.83	3.5			2.0	1000	641	0.80			FA 67 FAF67 F 67 FF 67	R37 R37 R37 R37
34	50	38.31	4.0			2.3	910	572	0.90				
37	47	35.91	4.3			2.6	795	509	1.05				
42	41	31.69	4.8	3.0	685	437	1.20	FA 67 FAF67 F 67 FF 67	R37 R37 R37 R37				
47	37	28.09	5.5	2.6	810	500	1.00						
55	31	23.88	6.4	2.9	740	454	1.10						
56	31	23.63	6.5	3.3	635	392	1.30						
64	27	20.57	7.5	3.9	535	333	1.55						
69	25	19.27	8.0	4.4	475	297	1.70	FA 67 FAF67 F 67 FF 67	R37 R37 R37 R37				
78	22	17.03	9.0	5.0	420	261	1.95						
83	21	15.81	9.7	5.5	375	238	2.2						
92	19	14.33	11										

上海承禹机电设备有限公司

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole
0.25KW						0.25KW					
3.4	605	386	1.00			11	225	121.57	1.80	FA 47	4P
3.8	525	338	1.15			12	193	105.09	2.1	FAF47	
5.1	400	255	1.50			15	164	89.29	2.4	F 47	
3.4	625	382	0.95	FA 57	R37					FF 47	
3.9	535	330	1.10	FAF57	R37						
4.4	485	298	1.25	F 57	R37	10	235	128.51	0.85		
5.0	425	262	1.40	FF 57	R37	11	215	117.88	0.90		
5.8	360	226	1.65			13	184	100.36	1.10		
6.5	320	200	1.90			15	159	86.53	1.25		
7.7	270	170	2.2			16	148	80.65	1.35		
						18	130	70.50	1.55		
5.2	395	249	1.00			20	121	66.09	1.65		
6.0	350	218	1.15			22	107	58.32	1.85		
6.7	305	193	1.30			24	100	54.54	2.0		
7.4	280	175	1.45			25	95	51.70	2.1		
5.1	405	253	1.00	FA 47	R17	28	86	47.02	2.3		
6.0	355	217	1.10	FAF47	R17	30	81	43.83	2.5		
6.8	310	190	1.30	F 47	R17	34	70	38.31	2.8		
7.3	290	178	1.40	FF 47	R17	36	66	35.91	3.0		
8.7	240	149	1.65			41	58	31.69	3.4		
9.9	210	131	1.90			46	52	28.09	3.9		
						54	44	23.88	4.6	FA 37	4P
8.9	240	145	0.85	FA 37	R17	55	43	23.63	4.6	FAF37	
10	210	129	0.95	FAF37	R17	63	38	20.57	5.3	F 37	
11	193	118	1.05	F 37	R17	67	35	19.27	5.7	FF 37	
13	160	98	1.25	FF 37	R17	76	31	17.03	6.4		
15	140	87	1.45			82	29	15.81	6.9		
						91	26	14.33	7.6		
3.1	765	281.71	1.95	FA 77		101	24	12.87	8.5		
3.3	715	262.93	2.1	FAF77		117	20	11.08	9.3		
3.9	615	225.79	2.5	F 77		125	19	10.42	9.7		
4.4	540	198.31	2.8	FF 77		145	17	8.97	11		
4.7	510	188.40	2.9			175	14	7.44	11		
						193	12	6.74	11		
3.8	620	228.99	1.30	FA 67		215	11	6.05	12		
4.5	530	195.39	1.55	FAF67		249	9.6	5.21	13		
5.2	465	170.85	1.75	F 67		265	9.0	4.90	13		
5.4	440	162.31	1.85	FF 67		308	7.7	4.22	14		
6.2	385	142.40	2.1			0.37KW					
5.7	420	228.99	1.95	FA 67		0.21	14900	6715	0.80		4P
6.7	360	195.39	2.3	FAF67		0.23	13100	5925	0.90	FA 127	
7.6	315	170.85	2.6	F 67		0.27	11300	5153	1.05	FAF127	
8.0	300	162.31	2.8	FF 67		0.30	9850	4533	1.20	F 127	
9.1	260	142.40	3.1			0.35	8590	3926	1.40	FF 127	
						0.40	7510	3454	1.60		
4.4	540	199.70	1.10	FA 57		0.46	6570	3031	1.85		
4.8	500	183.60	1.20	FAF57		0.45	6720	3037	1.15	FA 107	4P
5.6	425	157.09	1.40	F 57		0.50	6090	2756	1.25	FAF107	
6.5	370	136.16	1.60	FF 57		0.58	5240	2369	1.45	F 107	
6.9	345	127.27	1.75			0.67	4570	2068	1.70	FF 107	
8.0	300	110.01	2.0			0.86	3510	1597	2.2		
6.5	365	199.70	1.65	FA 57		0.61	5070	2245	0.85		4P
7.1	335	183.60	1.80	FAF57		0.70	4430	1970	0.95		
8.3	290	157.09	2.1	F 57		0.80	3900	1722	1.10	FA 97	
9.6	250	136.16	2.4	FF 57		0.90	3460	1527	1.25	FAF97	
10	235	127.27	2.6			1.0	2930	1327	1.45	F 97	
12	200	110.01	3.0			1.2	2650	1171	1.60	FF 97	
						1.4	2310	1022	1.85		
5.9	405	150.06	1.00	FA 47		1.5	1960	898	2.2		
6.8	355	130.07	1.15	FAF47							
7.2	330	121.57	1.20	F 47		1.1	2870	1300	1.05	FA 87	4P
8.4	285	105.09	1.40	FF 47		1.2	2550	1148	1.20	FAF87	
						1.4	2230	1010	1.35	F 87	
6.8	350	190.76	1.15	FA 47		1.6	1970	887	1.50	FF 87	
7.4	320	175.38	1.25	FAF47		1.8	1720	780	1.75	R57	
8.7	275	150.06	1.45	F 47							
10	240	130.07	1.65	FF 47							

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole		
0.37KW						0.37KW							
2.0	1470	674	2.0	FA 87	R57	5.7	615	157.09	0.95	FA 57	6P		
2.3	1340	609	2.2	FAF87	R57	6.6	535	136.16	1.10	FAF57			
2.7	1130	515	2.7	F 87	R57	7.1	500	127.27	1.20	F 57			
3.0	1000	452	3.0	FF 87	R57	8.2	430	110.01	1.40	FF 57			
1.7	1810	810	0.85	FA 77 FAF77 F 77 FF 77	R37	6.9	510	199.70	1.15	FA 57 FAF57 F 57 FF 57	4P		
1.9	1590	710	0.95		R37	7.5	470	183.60	1.30				
2.2	1390	615	1.10		R37	8.8	400	157.09	1.50				
2.6	1210	538	1.25		R37	10	350	136.16	1.70				
2.9	1080	480	1.40		R37	11	325	127.27	1.85				
3.3	920	413	1.65		R37	13	280	110.01	2.1				
3.8	830	367	1.80			15	240	93.47	2.5				
4.3	730	323	2.0			17	215	83.46	2.8				
3.2	980	437	0.85	FA 67 FAF67 F 67 FF 67	R37	9.2	385	150.06	1.05	FA 47 FAF47 F 47 FF 47	4P		
3.6	870	384	0.95		R37	11	335	130.07	1.20				
4.1	770	338	1.05		R37	13	270	105.09	1.50				
4.5	685	305	1.20		R37	15	230	89.29	1.75				
5.4	575	257	1.40		R37	17	205	79.72	1.95				
6.0	510	231	1.60		R37	20	174	68.09	2.3				
5.4	570	255	1.05	FA 57 FAF57 F 57 FF 57	R37	21	167	65.36	2.4	FA 37 FAF37 F 37 FF 37	4P		
6.9	445	201	1.35		R37	16	220	86.53	0.90				
7.6	405	181	1.50		R37	17	205	80.65	0.95				
5.3	605	262	1.00		R37	20	181	70.50	1.10				
6.1	515	226	1.15		R37	21	169	66.09	1.20				
6.9	455	200	1.30		R37	24	149	58.32	1.35				
8.1	385	170	1.55		R37	25	140	54.54	1.45				
9.1	345	152	1.75			27	132	51.70	1.50				
10	300	134	2.0			29	120	47.02	1.65				
						31	112	43.83	1.80				
7.9	395	175	1.00	FA 47	R17	36	98	38.31	2.0	FA 37 FAF37 F 37 FF 37	4P		
9.4	335	147	1.20	FAF47	R17	38	92	35.91	2.2				
11	295	130	1.35	F 47	R17	44	81	31.69	2.5				
				FF 47	R17	49	72	28.09	2.8				
						58	61	23.88	3.3				
2.5	1410	270.68	2.1	FA 87	8P	58	61	23.63	3.3				
2.7	1330	255.37	2.3	FAF87		67	53	20.57	3.8				
3.0	1190	228.93	2.5	F 87		72	49	19.27	4.1				
3.5	1020	197.20	2.9	FF 87		81	44	17.03	4.6				
						87	41	15.81	4.9				
3.3	1060	270.68	2.8	FA 87	6P	96	37	14.33	5.4				
3.5	1000	255.37	3.0	FAF87		107	33	12.87	6.1				
3.9	900	228.93	3.3	F 87		125	28	11.08	6.7				
				FF 87	132	27	10.42	6.9					
4.0	890	225.79	1.70	FA 77 FAF77 F 77 FF 77	6P	154	23	8.97	7.6				
4.5	780	198.31	1.95			186	19	7.44	7.6				
4.8	740	188.40	2.0			205	17	6.74	8.1				
5.4	655	166.47	2.3			228	16	6.05	8.7				
6.3	560	142.27	2.7			265	13	5.21	9.4				
						282	13	4.90	9.6				
4.9	720	281.71	2.1	FA 77	4P	327	11	4.22	10	FA 157 FAF157 F 157 FF 157	R97 R97 R97 R97		
5.2	675	262.93	2.2	FAF77		0.55KW							
6.1	580	225.79	2.6	F 77		0.22	20500	6295	0.90				
7.0	510	198.31	3.0	FF 77		0.25	17400	5404	1.05				
					0.49	8930	2780	2.0					
4.6	765	195.39	1.05	FA 67 FAF67 F 67 FF 67	6P	0.56	7760	2427	2.3				
5.3	670	170.85	1.20			0.81	5520	1674	3.3				
5.6	635	162.31	1.30			1.0	4220	1308	4.3				
6.3	560	142.40	1.45			1.2	3730	1169	4.8				
7.4	475	120.79	1.75										
6.0	585	228.99	1.40	FA 67 FAF67 F 67 FF 67	4P	0.35	13300	3926	0.90	FA 127 FAF127 F 127 FF 127	R77 R77 R77 R77		
7.1	500	195.39	1.65			0.39	11600	3454	1.05				
8.1	435	170.85	1.85			0.45	10200	3031	1.20				
8.5	415	162.31	1.95										
9.7	365	142.40	2.2										
11	310	120.79	2.7										

上海承禹机电设备有限公司

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (fb)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (fb)	机型号 Type	电机级数 Motor pole				
0.55KW						0.55KW									
0.57	8100	2369	0.95	FA 107 FAF107 F 107 FF 107	R77 R77 R77 R77	9.6	550	142.27	2.7	FA 77	4P				
0.66	7070	2068	1.10			10	505	130.42	3.0	FAF77					
0.74	6110	1826	1.25			12	440	114.45	3.4	F 77					
0.85	5440	1597	1.40			13	420	108.46	3.6	FF 77					
0.97	4750	1401	1.60			14	365	94.93	4.1						
1.1	4160	1243	1.85			7.0	755	195.39	1.10	FA 67 FAF67 F 67 FF 67	4P				
1.2	3700	1087	2.1			8.0	660	170.85	1.25						
1.4	3180	950	2.4			8.4	625	162.31	1.30						
1.6	2770	834	2.8			9.6	550	142.40	1.50						
2.1	2150	640	3.6	11	465	120.79	1.75								
1.0	4530	1327	0.95	12	420	109.04	1.95								
1.2	4060	1171	1.05	14	370	95.94	2.2								
1.3	3550	1022	1.20	15	350	90.59	2.3								
1.5	3050	898	1.40	17	310	79.76	2.7								
1.7	2690	784	1.60	FA 97 FAF97 F 97 FF 97	R57 R57 R57 R57	8.7	605	157.09	1.00	FA 57 FAF57 F 57 FF 57	4P				
2.0	2340	690	1.85			10	525	136.16	1.15						
2.2	2060	605	2.1			11	490	127.27	1.20						
2.6	1790	529	2.4			12	425	110.01	1.40						
2.9	1580	467	2.7			15	360	93.47	1.65						
3.4	1360	406	3.2			16	320	83.46	1.85						
3.7	1220	363	3.5			19	280	72.98	2.1						
1.5	3040	887	1.00			20	265	68.22	2.3						
1.7	2660	780	1.15			23	230	58.97	2.6						
2.0	2290	674	1.30	FA 87 FAF87 F 87 FF 87	R57 R57 R57 R57	13	405	105.09	1.00	FA 47 FAF47 F 47 FF 47	4P				
2.2	2080	609	1.45			15	345	89.29	1.15						
2.6	1750	545	1.70			17	310	79.72	1.30						
3.0	1540	452	1.95			20	265	68.09	1.50						
3.9	1160	345	2.6			21	250	65.36	1.60						
2.5	1860	538	0.80			24	220	56.49	1.85						
2.8	1660	480	0.90			28	185	48.00	2.2						
3.3	1420	413	1.05			32	166	42.86	2.4						
3.7	1270	367	1.20												
4.2	1120	323	1.35												
5.3	890	257	0.90	FA 67 FAF67 F 67 FF 67	R37 R37 R37 R37	23	225	58.32	0.90	FA 37 FAF37 F 37 FF 37	4P				
5.9	790	231	1.05			25	210	54.54	0.95						
6.6	705	205	1.15			26	200	51.70	1.00						
7.8	600	175	1.35			29	182	47.02	1.10						
2.5 2.7 3.0	2140 1960 1730	276.77 253.41 223.88	2.0 2.2 2.5	FA 97 FAF97 F 97 FF 97	8P	31	169	43.83	1.20			FA 37 FAF37 F 37 FF 37	4P		
						36	148	38.31	1.35						
						38	139	35.91	1.45						
						43	122	31.69	1.65						
2.5 2.7 3.0	2090 1970 1770 1520	270.68 255.37 228.93 197.20	1.45 1.50 1.70 1.95	FA 87 FAF87 F 87 FF 87	8P	48	109	28.09	1.85			FA 37 FAF37 F 37 FF 37	4P		
						57	92	23.68	2.2						
						58	91	23.63	2.2						
						66	79	20.57	2.5						
3.3 3.5 3.9 4.6 5.0	1580 1490 1340 1150 1050	270.68 255.37 228.93 197.20 179.97	1.90 2.0 2.2 2.6 2.9	FA 87 FAF87 F 87 FF 87	6P	71	74	19.27	2.7			FA 37 FAF37 F 37 FF 37	4P		
						80	66	17.03	3.0						
						95	55	14.33	3.6						
						106	50	12.87	4.0						
4.0 4.5 4.8 5.4 6.3 6.9	1320 1160 1100 970 830 760	225.79 198.31 188.40 166.47 142.27 130.42	1.15 1.30 1.35 1.55 1.80 1.95	FA 77 FAF77 F 77 FF 77	6P	123	43	11.08	4.4			FA 37 FAF37 F 37 FF 37	4P		
						130	40	10.42	4.6						
						152	35	8.97	5.1						
						170	31	8.01	5.5						
6.0 6.9 7.2 8.2	870 765 730 645	225.79 198.31 188.40 166.47	1.70 1.95 2.1 2.3	FA 77 FAF77 F 77 FF 77	4P	183	29	7.44	5.1			FA 37 FAF37 F 37 FF 37	4P		
						202	26	6.74	5.4						
						225	23	6.05	5.8						
						261	20	5.21	6.2						
0.50 0.57 0.82 1.1 1.2	12300 10700 7580 5830 5170	2780 2427 1674 1308 1169	1.45 1.70 2.4 3.1 3.5	FA 157 FAF157 F 157 FF 157	R97 R97 R97 R97	277	19	4.90	6.3			FA 157 FAF157 F 157 FF 157	4P		
						322	16	4.22	6.8						
						361	15	3.77	7.2						
						0.50	12300	2780	1.45					FA 157	R97
						0.57	10700	2427	1.70					FAF157	R97
0.82	7580	1674	2.4	F 157	R97										
1.1	5830	1308	3.1	FF 157	R97										
1.2	5170	1169	3.5												

上海承禹机电设备有限公司

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (fb)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (fb)	机型号 Type	电机级数 Motor pole
4.0KW						4.0KW					
5.6	6840	254.40	1.10	FA 107 FAF107 F 107 FF 107	4P	67	570	21.17	1.05	FA 57 FAF57 F 57 FF 57	4P
6.6	5790	215.37	1.35			74	515	19.11	1.15		
7.1	5360	199.31	1.45			84	450	16.81	1.35		
7.9	4810	178.64	1.60			89	425	15.88	1.40		
8.8	4340	161.28	1.75			105	365	13.52	1.65		
9.7	3940	146.49	1.95			116	330	12.29	1.80		
11	3500	129.97	2.2			133	285	10.64	2.1		
12	3170	117.94	2.4			153	250	9.31	1.70		
14	2730	101.38	2.8	173	220	8.19	1.90	FA 157 FAF157 F 157 FF 157	4P		
8.1	4700	174.87	0.90	184	210	7.73	2.0				
9.1	4200	156.30	1.00	216	177	6.58	2.4				
10	3780	140.71	1.15	237	161	5.98	2.6				
11	3430	127.42	1.25	274	139	5.18	3.0				
13	3040	112.99	1.40	5.5KW							
14	2750	102.16	1.55	2.5	19300	576	0.95			FA 127 FAF127 F 127 FF 127	4P
15	2620	97.58	1.65	2.8	16800	503	1.05				
16	2420	89.85	1.80	3.2	15000	446	1.20				
18	2160	80.31	2.0	4.1	11800	353	1.55				
20	1940	72.30	2.2	4.7	10100	302	1.80				
22	1760	65.47	2.4	5.2	9160	273	1.95				
13	2950	109.49	1.00	6.2	7750	232	2.3				
15	2630	97.89	1.15	7.1	6750	202	2.7				
16	2370	88.01	1.25	7.3	6570	197	2.7	FA 107 FAF107 F 107 FF 107	4P		
19	2050	76.39	1.45	3.4	14000	418	0.85				
21	1840	68.40	1.65	3.8	12600	374	0.95				
25	1530	56.75	1.95	4.6	10500	312	1.15				
28	1350	50.36	2.2	4.9	9840	293	1.20				
31	1220	45.28	2.3	5.5	8680	259	1.40				
21	1790	66.46	0.85	6.4	7500	223	1.60				
24	1570	58.32	0.95	FA 127 FAF127 F 127 FF 127	4P						
26	1490	55.27	1.00			3.3	14500	428	0.85		
29	1300	48.37	1.15			3.8	12700	376	0.95		
33	1170	43.58	1.30			2.7	19800	267.43	0.90		
37	1030	38.23	1.45			3.3	16100	217.62	1.10		
42	910	33.74	1.65			4.0	13200	178.20	1.35		
47	800	29.91	1.85			4.4	12100	162.96	1.50		
56	685	25.54	2.1			5.0	10500	141.80	1.70		
45	850	31.51	1.65	5.7	9260	125.14	1.95	FA 157 FAF157 F 157 FF 157	4P		
49	775	28.75	1.85	6.5	8030	108.49	2.2				
56	685	25.50	2.2	7.4	7140	96.53	2.5				
66	575	21.43	2.6	8.4	6350	85.80	2.8				
72	530	19.70	2.8	9.1	5800	78.46	3.1				
52	735	27.41	1.10	10	5050	68.28	3.6				
57	675	25.13	1.20	4.2	12600	170.38	0.95			FA 127 FAF127 F 127 FF 127	4P
64	595	22.05	1.40	4.6	11400	153.27	1.05				
68	560	20.90	1.45	5.7	9270	125.04	1.30				
78	490	18.29	1.64	6.2	8460	114.04	1.40				
86	445	16.48	1.85	FA 67 FAF67 F 67 FF 67	4P	6.6	7910	215.37	0.95	FA 107 FAF107 F 107 FF 107	4P
98	390	14.46	2.1			7.2	7320	199.31	1.05		
111	345	12.76	2.4			8.0	6560	178.64	1.15		
126	305	11.31	2.7			8.9	5920	161.28	1.30		
147	260	9.66	3.2			9.8	5380	146.49	1.45		
156	245	9.08	2.2			11	4770	129.97	1.60		
165	230	8.60	2.5			12	4330	117.94	1.75		
189	205	7.53	3.0			14	3720	101.38	2.1		
209	183	6.78	3.4			15	3400	92.47	2.3		
239	160	5.95	3.8			16	3250	88.49	2.4		
270	141	5.25	4.2			17	3080	83.99	2.5		
305	125	4.66	4.5			11	4680	127.42	0.90	FA 97 FAF97 F 97 FF 97	4P
357	107	3.97	4.7			13	4150	112.99	1.05		
						14	3750	102.16	1.15		

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole
5.5KW						7.5KW					
15	3580	97.58	1.20	FA 97 FAF97 F 97 FF 97	4P	4.6	14300	312	0.85	FA 127 FAF127 F 127 FF 127	R87 R87 R87 R87
16	3300	89.85	1.30			4.9	13500	293	0.90		
17	3180	86.59	1.35			5.5	11900	259	1.00		
18	2950	80.31	1.45			6.4	10300	223	1.15		
19	2780	75.63	1.55			7.2	9080	198	1.30	FA 157 FAF157 F 157 FF 157	8P
20	2660	72.30	1.60			3.3	21600	217.62	0.85		
22	2400	65.47	1.80			4.0	17700	178.20	1.00		
25	2130	58.06	2.0			4.4	16200	162.96	1.10		
27	1930	52.49	2.2			5.1	14100	141.80	1.30		
16	3230	88.01	0.95	FA 87 FAF87 F 87 FF 87	4P	5.8	12400	125.14	1.45		
19	2810	76.39	1.05			6.6	10800	108.49	1.65		
21	2510	68.40	1.20			7.5	9600	96.53	1.85		
25	2080	56.75	1.45			8.4	8530	85.80	2.1		
28	1850	50.36	1.60			9.2	7810	78.46	2.3		
32	1660	45.28	1.70			11	6790	68.28	2.7		
36	1440	39.30	1.90			12	5990	60.25	3.0		
41	1290	35.19	2.0			14	5200	52.24	3.5		
49	1070	29.20	2.3			15	4620	46.48	3.9		
42	1250	33.92	2.1			18	3980	40.06	4.5		
50	1060	28.78	2.3			3.6	20000	267.43	0.90	FA 157 FAF157 F 157 FF 157	6P
54	970	26.50	3.1			4.4	16200	217.62	1.10		
60	870	23.68	3.5			5.4	13300	178.20	1.35		
30	1780	48.37	0.85	FA 77 FAF77 F 77 FF 77	4P	5.9	12200	162.96	1.50		
33	1600	43.58	0.95			6.8	10600	141.80	1.70		
37	1400	38.23	1.05			7.7	9340	125.14	1.95		
42	1240	33.74	1.20			8.9	8090	108.49	2.2		
48	1100	29.91	1.35			9.9	7200	96.53	2.5		
56	940	25.54	1.55			11	6400	85.80	2.8		
56	940	25.50	1.60			12	5850	78.46	3.1		
67	785	21.43	1.90			14	5090	68.28	3.5		
73	725	19.70	2.1			16	4500	60.25	4.0		
82	645	17.49	2.3			18	3900	52.24	4.6		
91	575	15.64	2.6			5.7	12500	125.04	0.95	FA 127 FAF127 F 127 FF 127	8P
102	515	14.06	2.9			6.3	11400	114.04	1.05		
117	450	12.21	3.3			7.3	9840	98.69	1.20		
65	810	22.05	1.00	FA 67 FAF67 F 67 FF 67	4P	8.2	8690	87.08	1.40		
68	770	20.90	1.05			5.6	12700	170.38	0.95	FA 127 FAF127 F 127 FF 127	6P
78	670	18.29	1.20			6.2	11500	153.27	1.05		
87	605	16.48	1.35			7.7	9350	125.04	1.30		
99	530	14.46	1.55			8.4	8530	114.04	1.40		
112	470	12.76	1.75			8.4	8560	170.38	1.40	FA 127 FAF127 F 127 FF 127	4P
126	415	11.31	1.95			9.3	7700	153.27	1.55		
148	355	9.66	2.3			11	6280	125.04	1.90		
158	335	9.08	1.60			8.0	8950	178.64	0.85	FA 107 FAF107 F 107 FF 107	4P
166	315	8.60	1.80			8.9	8080	161.28	0.95		
190	275	7.53	2.2			9.8	7340	146.49	1.05		
211	250	6.78	2.5			11	6410	129.97	1.20		
240	220	5.95	2.8			12	5910	117.94	1.30		
272	193	5.25	3.1			14	5080	101.38	1.50		
307	171	4.66	3.3			15	4630	92.47	1.65		
360	146	3.97	3.4			16	4430	88.49	1.75		
85	620	16.81	0.95	FA 57 FAF57 F 57 FF 57	4P	17	4210	63.99	1.85	FA 97 FAF97 F 97 FF 97	4P
90	585	15.88	1.05			19	3730	74.52	2.1		
106	495	13.52	1.20			21	3390	67.62	2.3		
116	450	12.29	1.35			15	4890	97.58	0.90		
134	390	10.64	1.55			16	4500	89.85	0.95		
175	300	8.19	1.40			17	4340	86.59	1.00		
185	285	7.73	1.50			18	4020	80.31	1.05		
217	240	6.58	1.75			19	3790	75.63	1.15		
239	220	5.98	1.90			20	3620	72.30	1.20		
276	190	5.18	2.2			22	3280	65.47	1.30		

上海承禹机电设备有限公司

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (fb)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (fb)	机型号 Type	电机级数 Motor pole				
7.5KW						11.0KW									
25	2910	58.06	1.50	FA 97 FAF97 F 97 FF 97	4P	5.4	19500	267.43	0.90	FA 157 FAF157 F 157 FF 157	4P				
27	2630	52.49	1.65			6.6	15900	217.62	1.15						
32	2230	44.49	1.95			8.1	13000	178.20	1.40						
37	1950	38.86	2.2			8.8	11900	162.96	1.50						
44	1630	32.50	2.6			10	10300	141.80	1.75						
33	2170	43.28	1.40			12	9130	125.14	1.95						
39	1840	36.64	1.65			13	7910	108.49	2.3						
42	1700	33.91	2.5			15	7040	96.53	2.6						
47	1520	30.39	2.8	17	6260	85.80	2.9	FA 127 FAF127 F 127 FF 127	6P						
25	2840	56.75	1.05	18	5720	78.46	3.1								
28	2520	50.36	1.15	21	4980	68.28	3.6								
32	2270	45.28	1.25	7.7	13700	125.04	0.85								
36	1970	39.30	1.40	8.4	12500	114.04	0.95								
41	1760	35.19	1.50	9.7	10800	98.69	1.10								
49	1460	29.20	1.70	11	9550	87.08	1.25								
50	1440	28.78	1.70	13	8250	75.21	1.45								
54	1330	26.50	2.3	FA 87 FAF87 F 87 FF 87	4P	8.4	12500	170.38	0.95	FA 127 FAF127 F 127 FF 127	4P				
60	1190	23.68	2.5			9.4	11200	153.27	1.05						
67	1070	21.32	2.8			11	9150	125.04	1.30						
74	970	19.31	3.1			13	8340	114.04	1.45						
84	860	17.12	3.5			15	7220	98.69	1.65						
92	775	15.48	3.9			16	6370	87.08	1.90						
42	1690	33.74	0.90			19	5500	75.21	2.2						
48	1500	29.91	1.00			FA 77 FAF77 F 77 FF 77	4P	12	8600			117.94	0.90	FA 107 FAF107 F 107 FF 107	4P
56	1280	25.54	1.15	14	7400			27.57	1.05						
56	1280	25.50	1.15	16	6750			25.14	1.15						
67	1070	21.43	1.40	17	6130			83.99	1.25						
73	990	19.70	1.50	19	5440			74.52	1.40						
82	880	17.49	1.70	21	4930			67.62	1.55						
91	785	15.64	1.90	25	4240			58.12	1.80						
102	705	14.06	2.1	28	3700			50.73	2.1						
117	610	12.21	2.5	33	3140			43.03	2.5						
131	545	10.93	2.7	43	2470			33.79	3.0						
154	465	9.30	2.3	52	2010			27.57	3.9						
173	415	8.26	2.6	57	1830			25.14	4.3						
194	370	7.38	2.9	22	4780			65.47	0.90	FA 97 FAF97 F 97 FF 97	4P				
215	335	6.64	3.2	25	4240			58.06	1.00						
248	290	5.76	3.7	27	3830			52.49	1.10						
277	260	5.16	4.2	32	3250			44.49	1.30						
344	215	4.28	4.7	37	2830			38.86	1.50						
11.0KW								44	2370			32.50	1.80		
4.8	20300	302	0.90	FA 157 R97 FAF157 R97 F 157 R97 FF 157 R97	4P			42	2470			33.91	1.75		
5.3	18300	273	1.00			47	2220	30.39	1.95						
6.2	15500	232	1.15			52	2000	27.44	2.2						
7.1	13500	202	1.35			58	1820	24.92	2.4						
7.3	13200	197	1.35			65	1610	22.11	2.7						
6.4	15000	223	0.80	FA 127 R87 FAF127 R87 F 127 R87 FF 127 R87	4P	37	2870	39.30	0.95	FA 87 FAF87 F 87 FF 87	4P				
7.3	13300	198	0.90			41	2570	35.19	1.00						
8.7	11100	166	1.10			49	2130	29.20	1.20						
5.1	20700	141.80	0.85	FA 157 FAF157 F 157 FF 157	8P	54	1930	26.50	1.55						
5.8	18300	125.14	1.00			61	1730	23.68	1.75						
6.6	15800	108.49	1.15			68	1560	21.32	1.95						
7.5	14100	96.53	1.30			75	1410	19.31	2.1						
5.4	19500	178.20	0.90	FA 157 FAF157 F 157 FF 157	6P	84	1250	17.12	2.4						
5.9	17800	162.96	1.00			93	1130	15.48	2.7						
6.8	15500	141.80	1.15			110	960	13.12	3.1						
7.7	13700	125.14	1.30			73	1440	19.70	1.05	FA 77 FAF77 F 77 FF 77	4P				
8.9	11900	108.49	1.50			82	1280	17.49	1.20						
9.9	10600	96.53	1.70			92	1140	15.64	1.30						
11	9390	85.80	1.90			102	1030	14.06	1.45						
12	8590	78.46	2.1			118	890	12.21	1.70						
						132	795	10.93	1.90						
						155	680	9.30	1.60						

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole
11.0KW						15.0KW					
174	605	8.26	1.80	FA 77 FAF77 F 77 FF 77	4P	59	2450	24.92	1.75	FA 97 FAF97 F 97 FF 97	4P
195	540	7.38	2.0			66	2170	22.11	2.0		
217	485	6.64	2.2			73	1970	20.07	2.2		
250	420	5.76	2.6			85	1690	17.25	2.5		
279	375	5.16	2.9			97	1480	15.06	2.9		
336	310	4.28	3.2			114	1250	12.77	3.4		
						131	1100	11.16	3.7		
15KW											
6.3	20900	232	0.85	FA 157	R97	55	2600	26.50	1.15	FA 87 FAF87 F 87 FF 87	4P
7.2	18300	202	1.00	FAF157	R97	62	2320	23.68	1.30		
7.4	17700	197	1.00	F 157	R97	68	2090	21.32	1.45		
				FF 157	R97	76	1890	19.31	1.60		
						85	1680	17.12	1.80		
6.8	20900	141.80	0.85	FA 157	6P	94	1520	15.48	2.0	FA 87 FAF87 F 87 FF 87	4P
7.8	18500	125.14	0.95	FAF157		111	1290	13.12	2.3		
8.9	16000	108.49	1.10	F 157		127	1120	11.46	2.7		
10	14300	86.53	1.25	FF 157		152	940	9.58	3.1		
11	12700	85.80	1.40			176	810	8.30	1.90		
						199	720	7.35	2.1		
6.7	21400	217.62	0.85	FA 157 FAF157 F 157 FF 157	4P	220	650	6.65	2.3		
8.2	17500	178.20	1.05			259	555	5.63	2.8		
9.0	16000	162.96	1.15			297	485	4.92	3.2		
10	13900	141.80	1.30			355	405	4.12	3.6		
12	12300	125.14	1.45								
13	10600	108.49	1.70			18.5KW					
15	9470	96.53	1.90			7.2	22500	202	0.80	FA 157 R97 FAF157 R97 F 157 R97 FF 157 R97	4P
17	8420	85.80	2.1			7.5	21800	197	0.80		
19	7700	78.46	2.3								
21	6700	68.28	2.7								
24	5910	60.25	3.0								
9.8	14600	98.69	0.80	FA 127 FAF127 F 127 FF 127	6P	8.2	21500	178.20	0.85	FA 157 FAF157 F 157 FF 157	4P
11	12900	87.08	0.95			9.0	19700	162.96	0.90		
13	11100	75.21	1.10			10	17100	141.80	1.05		
14	10300	69.89	1.15			12	15100	125.14	1.20		
15	9440	63.74	1.25			14	13100	108.49	1.40		
12	12300	125.04	1.00	FA 127 FAF127 F 127 FF 127	4P	15	11600	96.53	1.55	FA 127 FAF127 F 127 FF 127	4P
13	11200	114.04	1.05			17	10300	85.80	1.75		
15	9710	98.69	1.25			19	9760	78.46	1.90		
17	8570	87.08	1.40			21	8230	68.28	2.2		
19	7400	75.21	1.60			24	7270	60.25	2.5		
21	6870	69.89	1.75			28	6300	52.24	2.9		
16	9070	92.47	0.85	FA 107 FAF107 F 107 FF 107	4P	13	13800	114.04	0.85	FA 107 FAF107 F 107 FF 107	4P
17	8680	88.49	0.90			15	11900	98.69	1.00		
17	8240	83.99	0.95			17	10500	87.08	1.15		
20	7310	74.52	1.05			19	9090	75.21	1.30		
22	6630	67.62	1.15			21	8450	69.89	1.40		
25	5700	58.12	1.35			23	7710	63.74	1.55		
29	4980	50.73	1.55			26	6670	55.16	1.80		
34	4220	43.03	1.80			30	5880	48.67	2.0		
39	3690	37.61	2.1			20	8990	74.52	0.85	FA 107 FAF107 F 107 FF 107	4P
46	3120	31.80	2.5			22	8150	67.62	0.95		
43	3320	33.79	2.2			25	7010	58.12	1.10		
53	2700	27.57	2.9			29	6120	50.73	1.25		
58	2470	25.14	3.2			34	5190	43.03	1.50		
67	2130	21.76	3.7			39	4540	37.61	1.70		
						46	3830	31.80	2.0		
						43	4070	33.79	1.80		
						53	3320	27.57	2.4		
						58	3030	25.14	2.6		
						67	2620	21.76	3.0		
33	4360	44.49	1.00	FA 97 FAF97 F 97 FF 97	4P	38	4690	38.86	0.90	FA 97 FAF97 F 97 FF 97	4P
38	3810	38.86	1.15			45	3920	32.50	1.10		
45	3190	32.50	1.35			53	3310	27.44	1.30		
43	3330	33.91	1.30			59	3010	24.92	1.45		
48	2980	30.39	1.45			66	2670	22.11	1.60		
53	2690	27.44	1.60								

上海承禹机电设备有限公司



输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole		
18.5KW						22KW							
73	2420	20.07	1.80	FA 97 FAF97 F 97 FF 97	4P	69	3060	21.32	1.00	FA 87 FAF87 F 87 FF 87	4P		
85	2080	17.25	2.1			76	2770	19.31	1.10				
97	1820	15.06	2.4			86	2460	17.12	1.20				
115	1540	12.77	2.8			95	2220	15.48	1.35				
131	1350	11.16	3.0			112	1880	13.12	1.60				
69	2570	21.32	1.15	FA 87 FAF87 F 87 FF 87	4P	128	1640	11.46	1.85	FA 157 FAF157 F 157 FF 157	4P		
76	2330	19.31	1.30			153	1370	9.58	2.1				
86	2060	17.12	1.45			177	1190	8.30	1.30				
95	1870	15.48	1.60			199	1050	7.35	1.45				
112	1580	13.12	1.90			220	950	6.65	1.60				
128	1380	11.46	2.2			260	810	5.63	1.90				
153	1160	9.58	2.5			298	705	4.92	2.2				
177	1000	8.30	1.55			356	590	4.12	2.5				
199	890	7.35	1.75			30KW							
220	800	6.65	1.90			14	21100	108.49	0.85			FA 157 FAF157 F 157 FF 157	4P
260	680	5.63	2.2	15	18800	96.53	0.95						
298	595	4.92	2.6	17	16700	85.80	1.10						
356	495	4.12	2.9	19	15300	78.46	1.20						
						22	13300	68.28	1.35				
						24	11700	60.25	1.55				
						28	10200	52.24	1.75				
						32	9060	46.48	2.0				
						37	7810	40.06	2.3				
22KW													
10	20900	96.53	0.85	FA 157 FAF157 F 157 FF 157	6P	19	14700	75.21	0.80	FA 127 FAF127 F 127 FF 127	4P		
11	18600	85.80	0.95			21	13700	69.89	0.90				
12	17000	78.46	1.05			23	12500	63.74	0.95				
14	14800	68.28	1.20			27	10800	55.16	1.10				
10	20300	141.80	0.90	FA 157 FAF157 F 157 FF 157	4P	30	9510	48.67	1.25				
12	17900	125.14	1.00			35	8210	42.04	1.45				
14	15600	108.49	1.15			39	7270	37.18	1.65				
15	13800	96.53	1.30			47	6110	31.25	1.95				
17	12300	85.80	1.45			58	4930	25.24	2.4				
19	11300	78.46	1.60			55	5240	26.79	1.60				
21	9790	68.28	1.85			60	4790	24.50	1.80				
24	8640	60.25	2.1			69	4170	21.32	2.9				
28	7490	52.24	2.4			78	3680	18.82	3.0				
32	6660	46.48	2.7										
37	5740	40.06	3.1										
45	4670	32.55	3.9										
15	14200	98.69	0.85	FA 127 FAF127 F 127 FF 127	4P	34	8390	43.03	0.90	FA 107 FAF107 F 107 FF 107	4P		
17	12500	87.08	0.95			39	7330	37.61	1.05				
19	10800	75.21	1.10			46	6200	31.80	1.25				
21	10000	69.89	1.20			53	5370	27.57	1.45				
23	9160	63.74	1.30			58	4900	25.14	1.60				
26	7930	55.16	1.50			68	4240	21.76	1.85				
30	7000	48.67	1.70			77	3740	19.20	2.1				
35	6040	42.04	2.0			89	3230	16.58	2.4				
25	8330	58.12	0.90	FA 107 FAF107 F 107 FF 107	4P	100	2860	14.67	2.7				
29	7280	50.73	1.05			119	2400	12.33	2.9				
34	6170	43.03	1.25			148	1940	9.96	3.3				
39	5390	37.61	1.40			66	4310	22.11	1.00				
46	4560	31.80	1.70			73	3910	20.07	1.10				
43	4850	33.76	1.55			85	3360	17.25	1.30				
53	3950	27.57	2.0			98	2930	15.06	1.45				
58	3610	25.14	2.2			115	2490	12.77	1.75				
67	3120	21.76	2.5			132	2180	11.16	1.96				
76	2750	19.20	2.8			162	1770	9.06	1.35				
						179	1600	8.22	1.45	FA 97 FAF97 F 97 FF 97	4P		
						208	1380	7.07	1.70				
						238	1200	6.17	1.85				
						281	1020	5.23	2.1				
						321	890	4.57	2.3				

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole
37KW						45KW					
17	20600	85.80	0.85	FA 157 FAF157 F 157 FF 157	4P	53	8060	27.57	0.95	FA 107 FAF107 F 107 FF 107	4P
19	18900	78.46	0.95			58	7350	25.14	1.05		
22	16400	68.28	1.10			68	6060	21.76	1.25		
24	14500	60.25	1.25			77	5610	19.20	1.40		
28	12600	52.24	1.45			89	4850	16.58	1.60		
32	11200	46.48	1.60			100	4290	14.67	1.80		
37	9630	40.06	1.85			119	3600	12.33	1.95		
45	7820	32.50	2.3			148	2910	9.96	2.2		
53	6630	27.60	2.7			152	2830	9.69	1.75		
						176	2450	8.37	1.95		
						199	2160	7.40	2.1		
						236	1820	6.22	2.5		
						55KW					
27	13300	55.16	0.90	FA 127 FAF127 F 127 FF 127	4P	24	21500	60.25	0.85	FA 157 FAF157 F 157 FF 157	4P
30	11700	48.67	1.00			28	18600	52.24	0.95		
35	10100	42.04	1.20			32	16500	46.48	1.10		
39	8960	37.18	1.35			37	14300	40.06	1.25		
47	7530	31.25	1.60			45	11600	32.55	1.55		
58	6080	25.24	1.95			53	9830	27.60	1.85		
55	6460	26.79	1.30			52	10200	28.60	1.65		
60	5910	24.50	1.45			58	9060	25.43	1.65		
69	5140	21.32	2.3			67	7890	22.16	2.3		
78	4530	18.82	2.4			75	7040	19.77	2.4		
90	3930	16.31	2.8			88	6000	16.85	3.0		
101	3500	14.51	3.1								
117	3010	12.51	3.3								
144	2450	10.16	3.9								
166	2130	8.62	3.3								
186	1890	7.88	3.2								
53	6630	27.57	1.20	FA 107 FAF107 F 107 FF 107	4P	40	13300	37.18	0.90	FA 127 FAF127 F 127 FF 127	4P
58	6040	25.14	1.30			47	11200	31.25	1.10		
68	5230	21.76	1.50			58	9010	25.24	1.35		
77	4610	19.20	1.70			69	7610	21.32	1.60		
89	3990	16.58	1.95			78	6720	18.82	1.65		
100	3530	14.67	2.2			90	5820	16.31	1.90		
119	2960	12.33	2.4			101	5180	14.51	2.1		
148	2390	9.96	2.7			118	4470	12.51	2.2		
152	2330	9.69	2.1			145	3630	10.16	2.6		
176	2010	8.37	2.4			166	3160	8.62	2.2		
199	1780	7.40	2.6			187	2810	7.88	2.1		
236	1500	6.22	3.1			217	2420	6.80	2.9		
						267	1970	5.52	3.0		
						315	1670	4.68	3.6		
45KW						75KW					
22	20000	68.28	0.90	FA 157 FAF157 F 157 FF 157	4P	32	22500	46.48	0.80	FA 157 FAF157 F 157 FF 157	4P
24	17600	60.25	1.00			37	19400	40.06	0.95		
28	15300	52.24	1.20			45	15800	32.55	1.15		
32	13600	46.48	1.30			54	13400	27.60	1.35		
37	11700	40.06	1.55			52	13800	28.60	1.25		
45	9510	32.55	1.90			58	12300	25.43	1.20		
53	8070	27.60	2.2			67	10700	22.16	1.70		
						75	9570	19.77	1.80		
30	14300	48.67	0.85	FA 127 FAF127 F 127 FF 127	4P	88	8150	16.85	2.2	FA 127 FAF127 F 127 FF 127	4P
35	12300	42.04	0.95			106	6760	13.96	2.5		
39	10900	37.18	1.10			124	5770	11.92	2.8		
47	9160	31.25	1.30								
58	7400	25.24	1.60			58	12200	25.24	1.00		
55	7850	26.79	1.10			69	10300	21.32	1.15		
60	7180	24.50	1.20			78	9130	18.82	1.20		
69	6250	21.32	1.90			90	7920	16.31	1.40		
78	5520	18.82	2.0			102	7040	14.51	1.55		
90	4780	16.31	2.3			118	6070	12.51	1.65		
101	4250	14.51	2.6			145	4930	10.16	1.95		
117	3670	12.51	2.7			167	4290	8.62	1.65		
144	2980	10.16	3.2			188	3810	7.88	1.55		
166	2590	8.62	2.7			218	3290	6.80	2.1		
186	2300	7.88	2.6			268	2670	5.52	2.2		
216	1990	6.80	3.5			316	2270	4.68	2.7		
266	1610	5.52	3.7								



上海承禹机电设备有限公司

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole
90KW					
45	18900	32.55	0.95		4P
54	16000	27.60	1.10		
52	16600	28.60	1.00		
58	14800	25.43	1.00	FA 157	
67	12900	22.16	1.40	FAF157	
75	11500	19.77	1.50	F 157	
88	9790	16.85	1.85	FF 157	
106	8110	13.96	2.1		
124	6920	11.92	2.3		
58	14700	25.24	0.80		4P
69	12400	21.32	0.95		
78	11000	18.82	1.00		
90	9500	16.31	1.15		
102	8450	14.51	1.30	FA 127	
118	7280	12.51	1.35	FAF127	
145	5920	10.16	1.60	F 127	
167	5150	8.62	1.35	FF 127	
188	4580	7.88	1.30		
218	3950	6.80	1.75		
268	3210	5.52	1.85		
316	2720	4.68	2.2		
110KW					
54	19500	27.60	0.90		4P
67	15700	22.16	1.15	FA 157	
75	14000	19.77	1.20	FAF157	
88	11900	16.85	1.50	F 157	
106	9880	13.96	1.70	FF 157	
125	8430	11.92	1.90		
132KW					
67	18800	22.16	1.15	FA 157	4P
75	16800	19.77	1.20	FAF157	
88	14300	16.85	1.50	F 157	
106	11900	13.96	1.70	FF 157	
125	10100	11.92	1.90		
160KW					
88	17300	16.85	1.05	FA 157	4P
106	14400	13.96	1.20	FAF157	
125	12300	11.92	1.30	F 157	
				FF 157	
200KW					
88	21700	16.85	0.85	FA 157	4P
106	18000	13.96	0.95	FAF157	
125	15300	11.92	1.05	F 157	
				FF 157	



F37

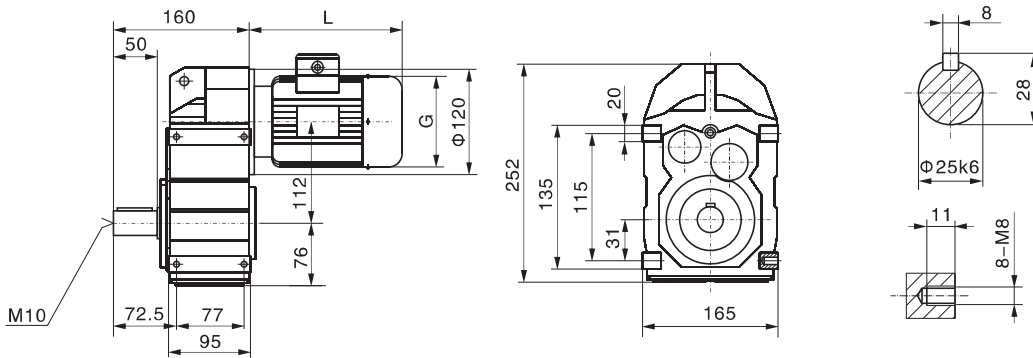



FA37

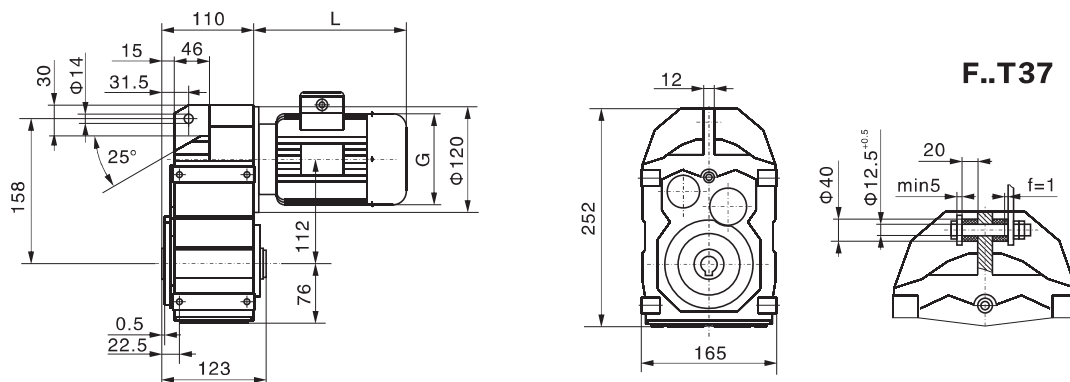

FF37


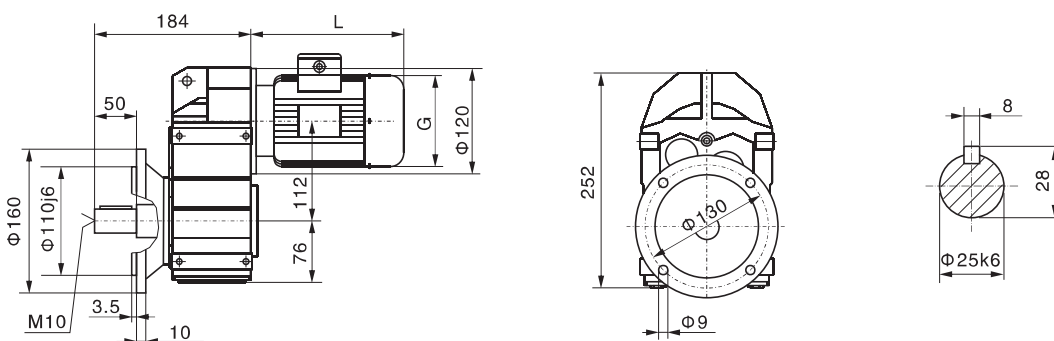


FAF37


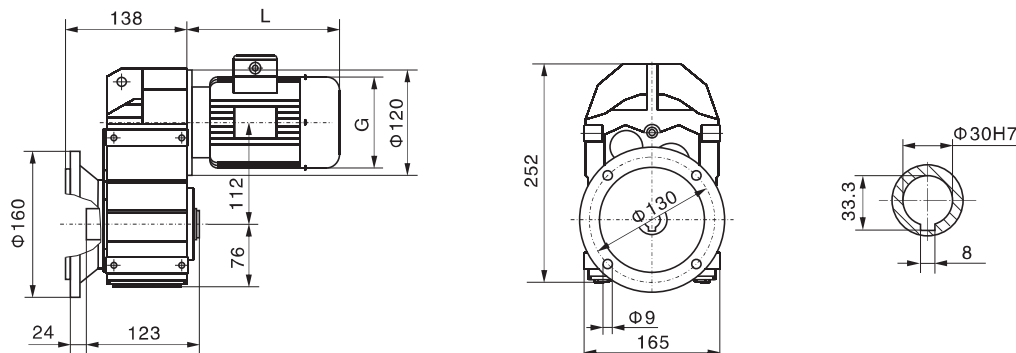


上海承禹机电设备有限公司



FAZ37

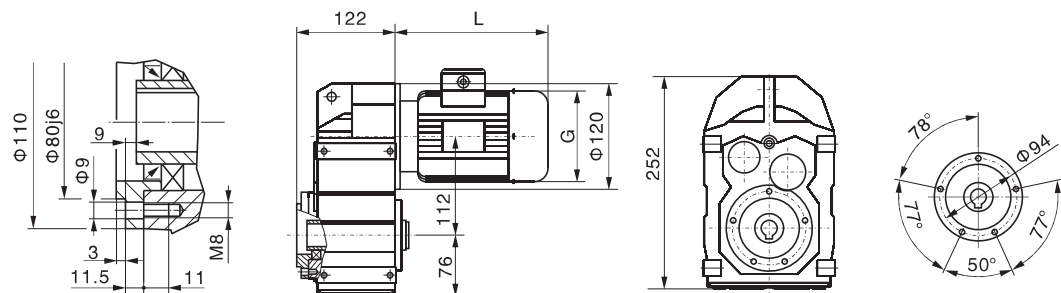

F..37 R17

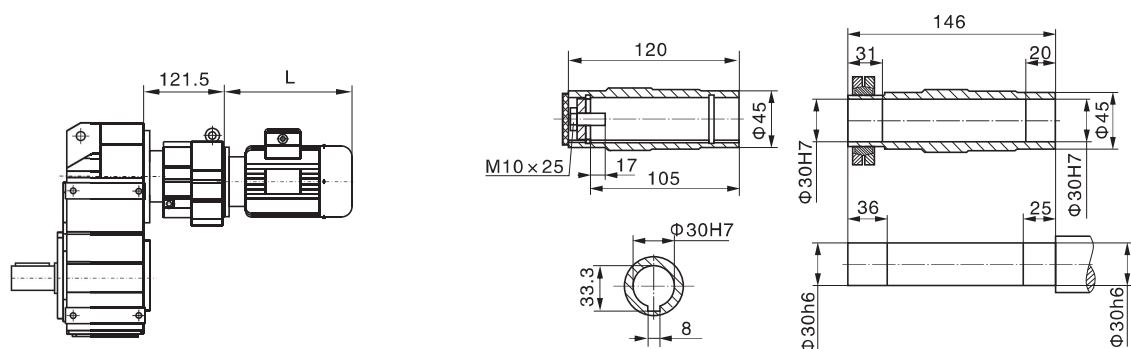



F..S37

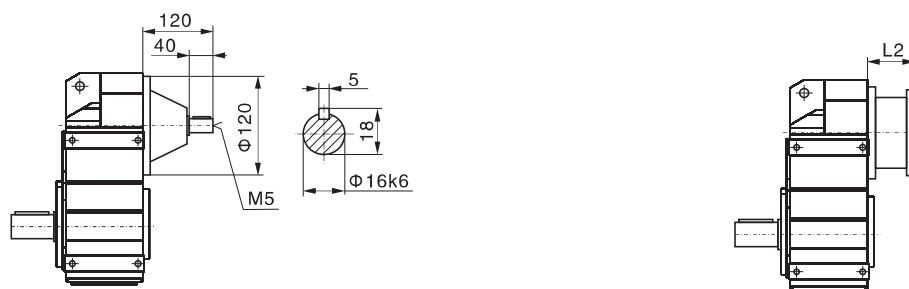



电机需方配或配特殊电机
时需加联接法兰



F47

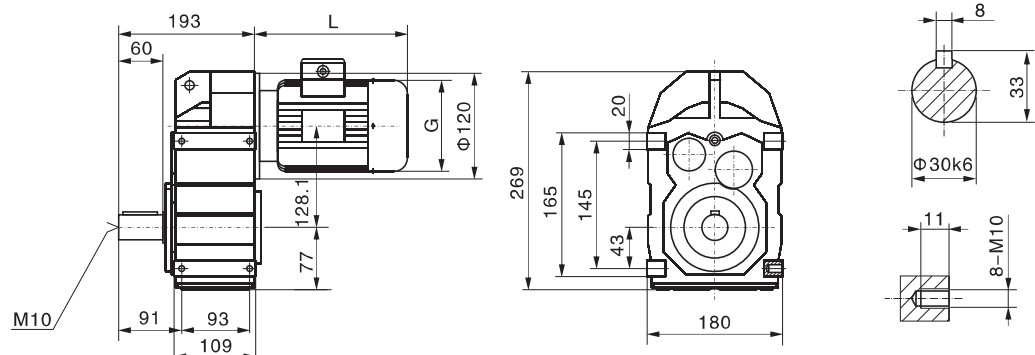





FA47

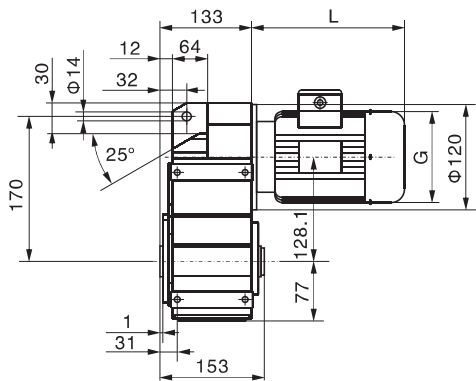





F..T47







FF47

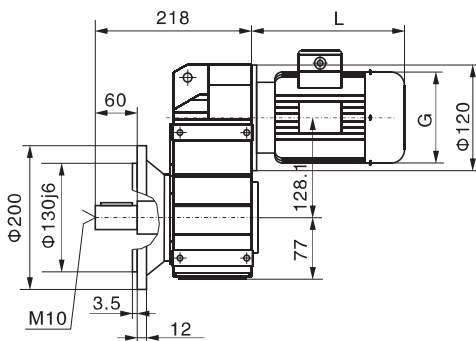




FAF47

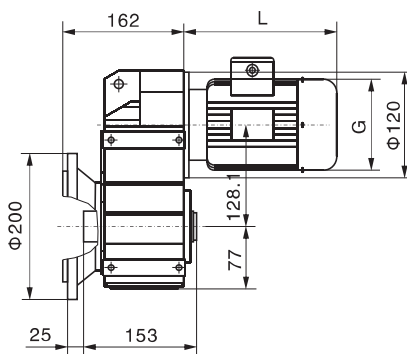



FAZ47

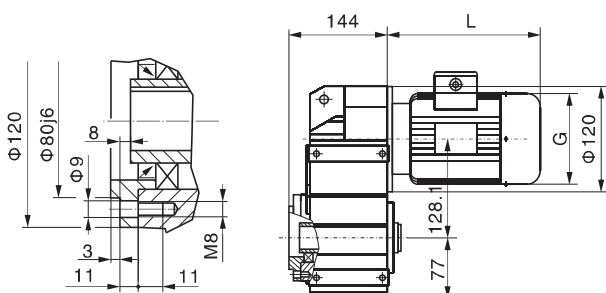


F..47 R17

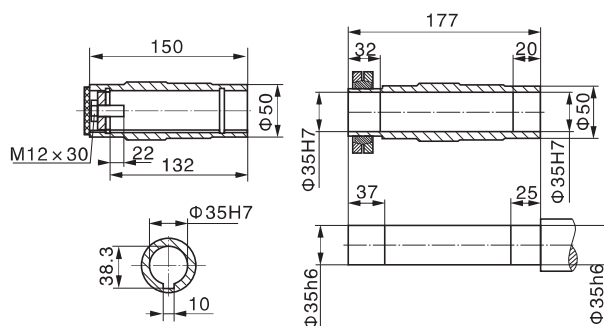




F..S47

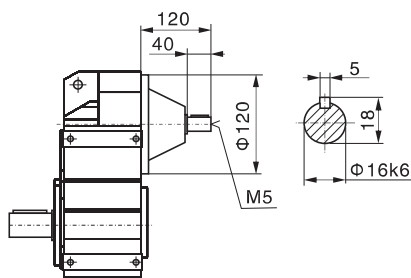




电机需方配或配特殊电机
时需加联接法兰




F57

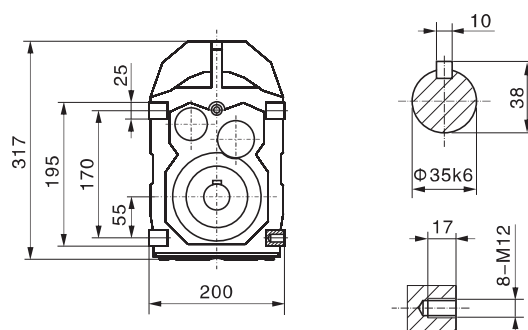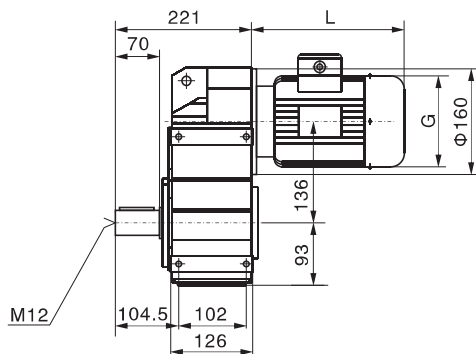





FA57

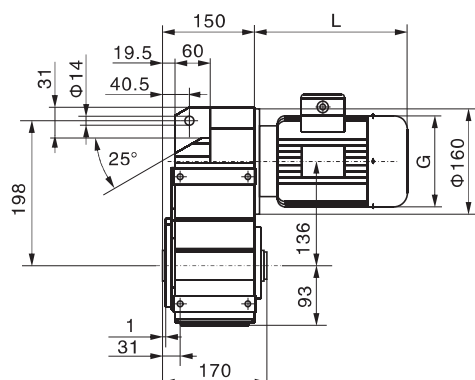





F..T57







FF57

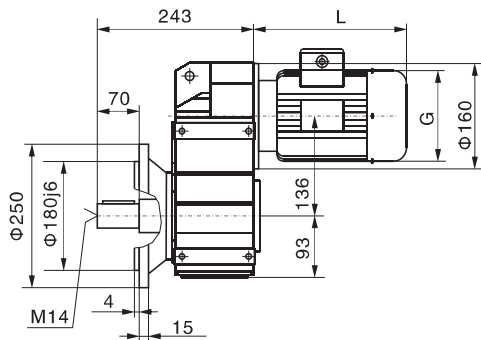




FAF57

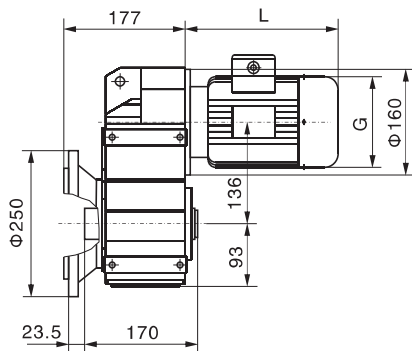

FAZ57


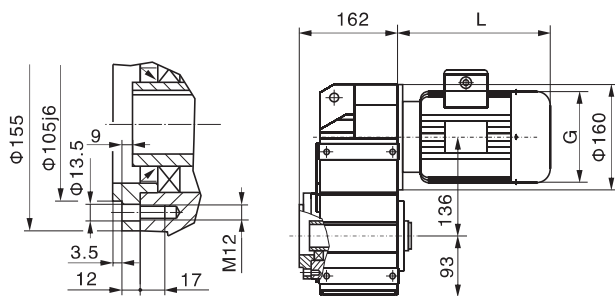


F..57 R37

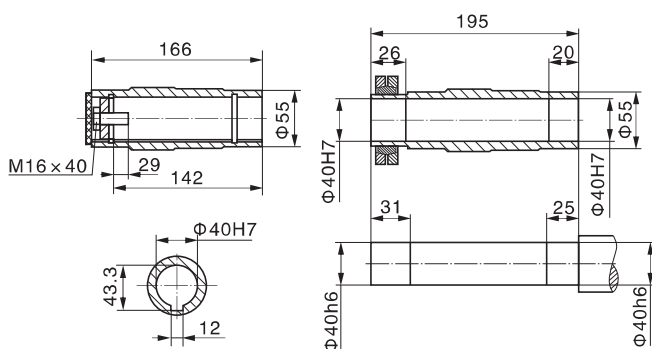


上海承禹机电设备有限公司





F..S57

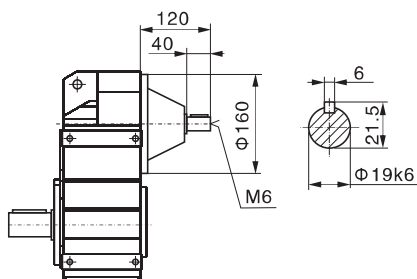




电机需方配或配特殊电机
时需加联接法兰




F67

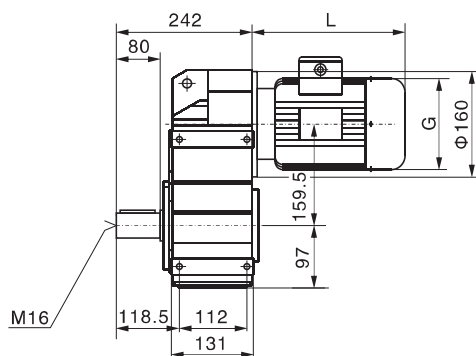





FA67

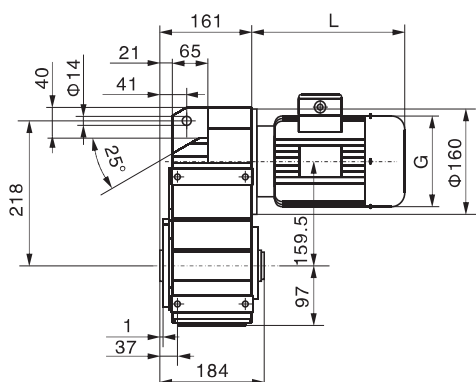



F..T67





FF67

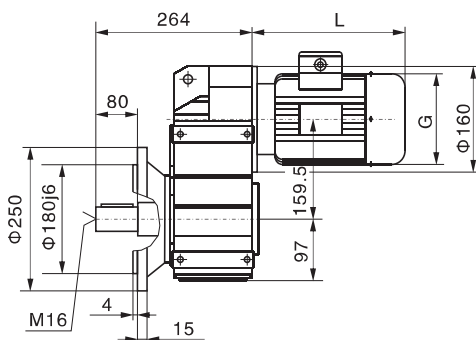



FAF67

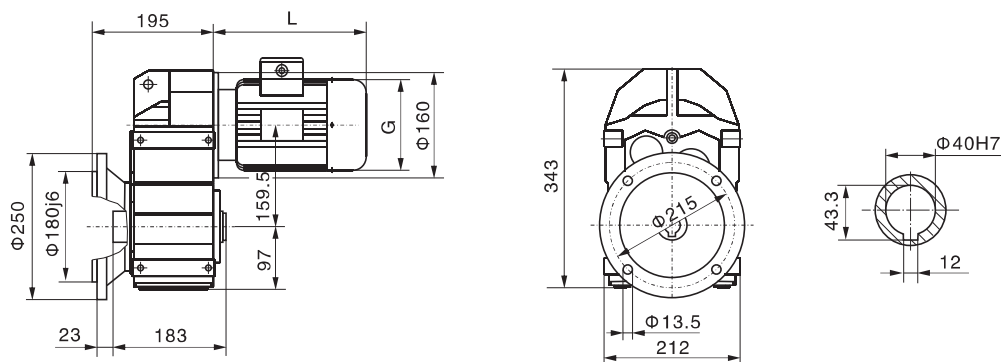



FAZ67

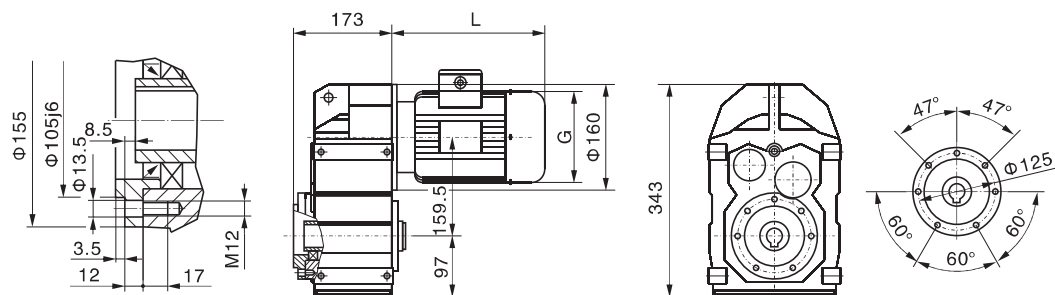


F..67 R37

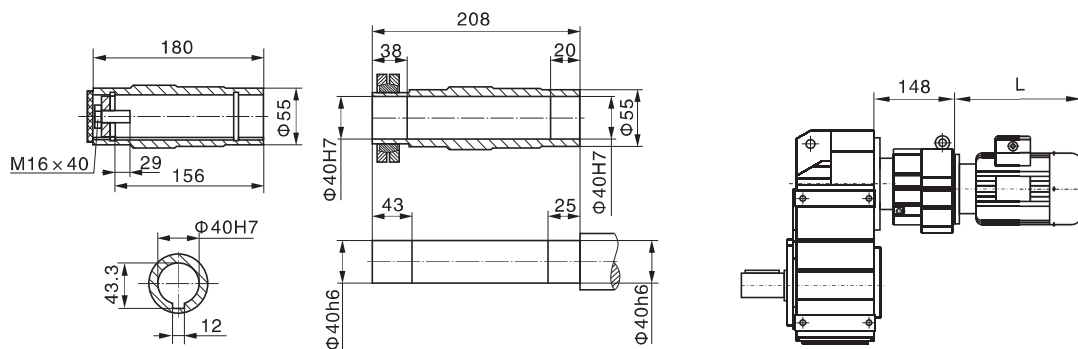



电机需方配或配特殊电机
时需加联接法兰

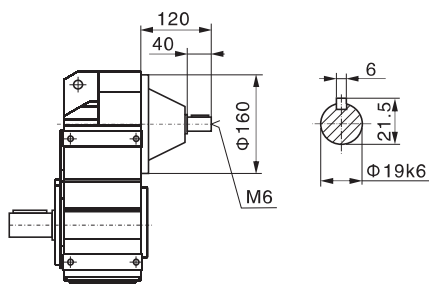



F..S67





F77

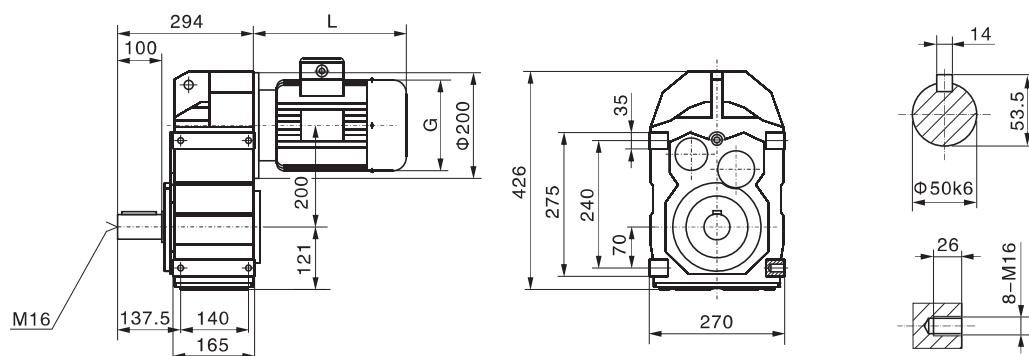



FA77

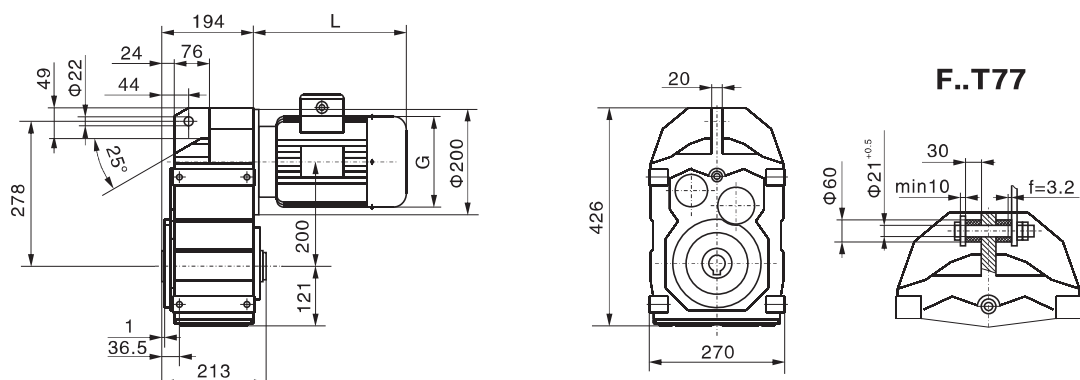



FF77

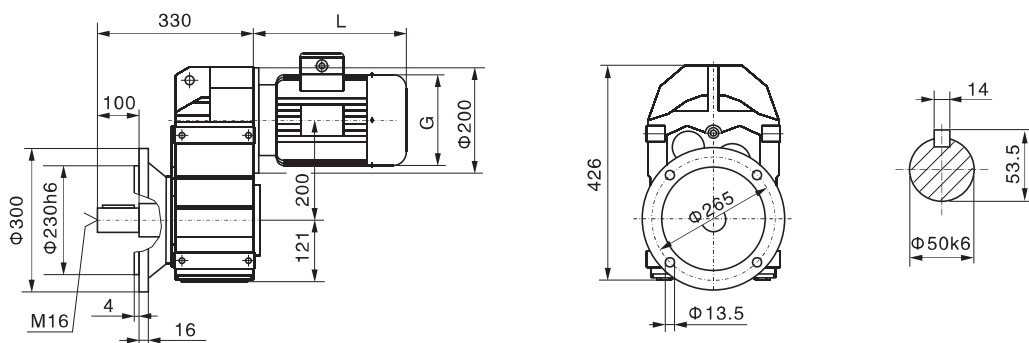



FAF77

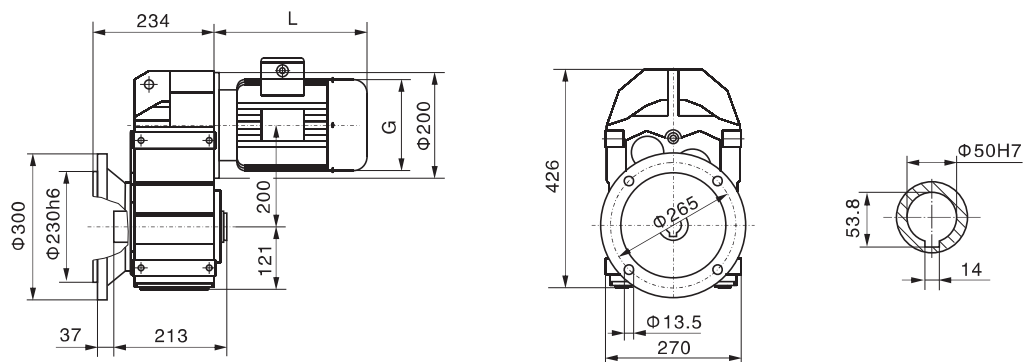


FAZ77

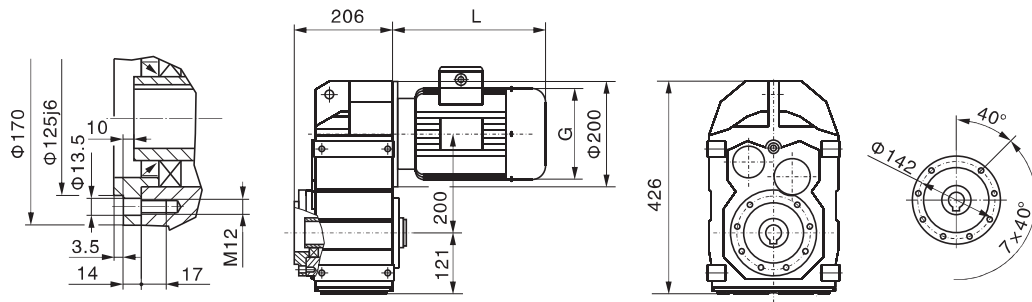



F..77 R37

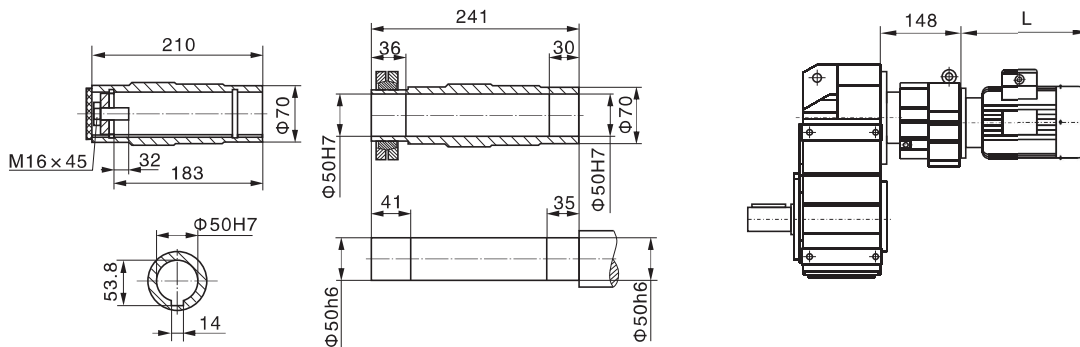


电机需方配或配特殊电机
时需加联接法兰

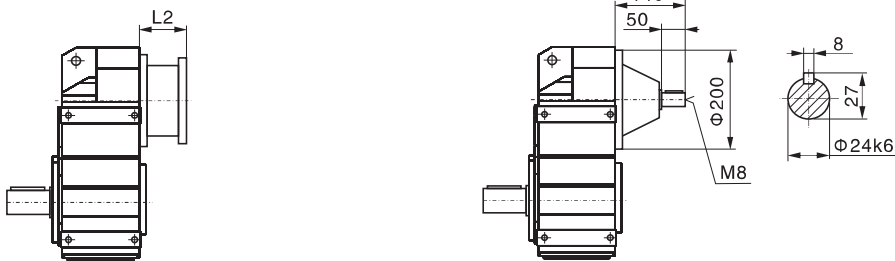

F..S77

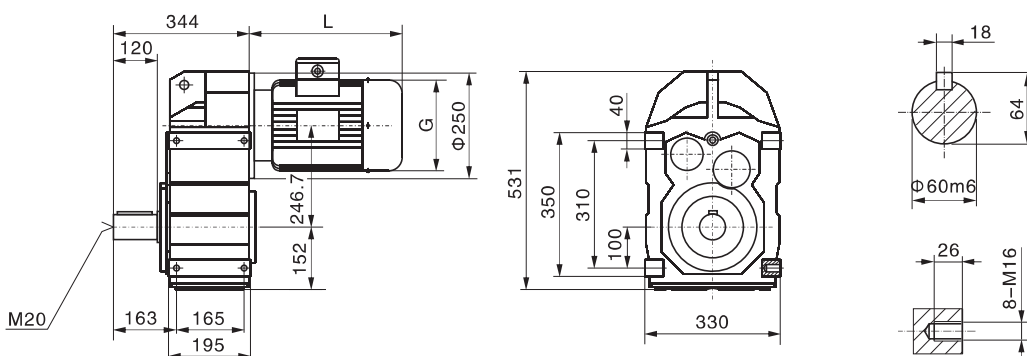



F87




上海承禹机电设备有限公司



FA87

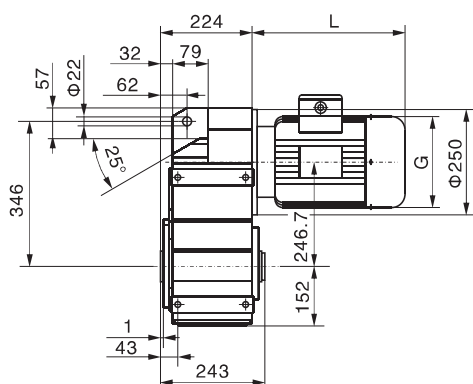



F..T87





FF87

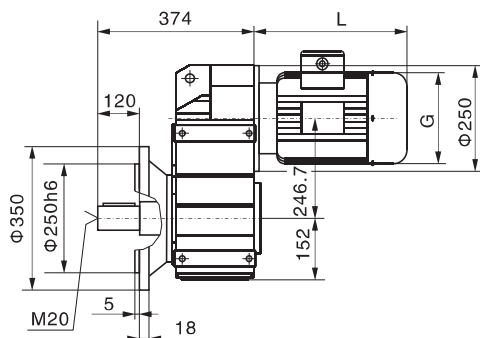



FAF87

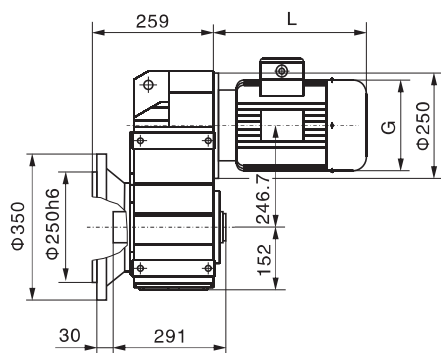

FAZ87

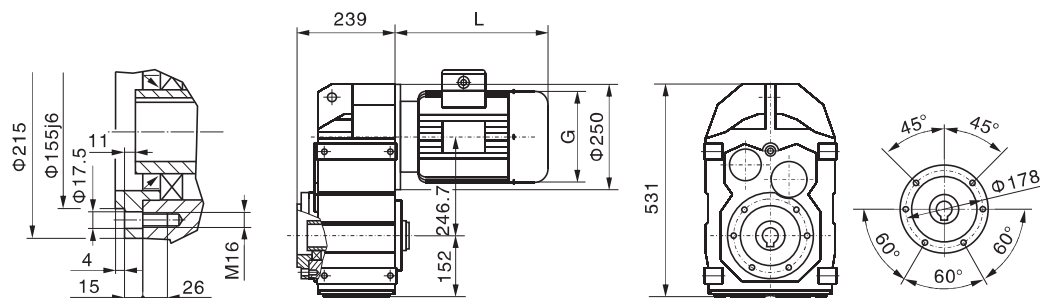



F..87 R57


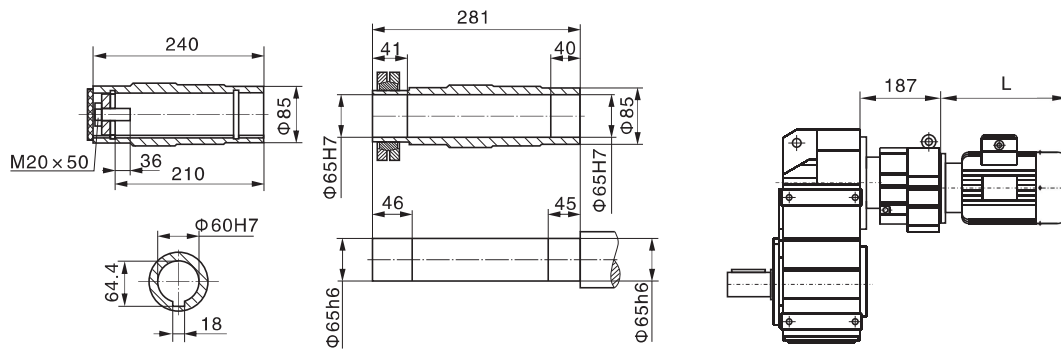


电机需方配或配特殊电机
时需加联接法兰


F..S87

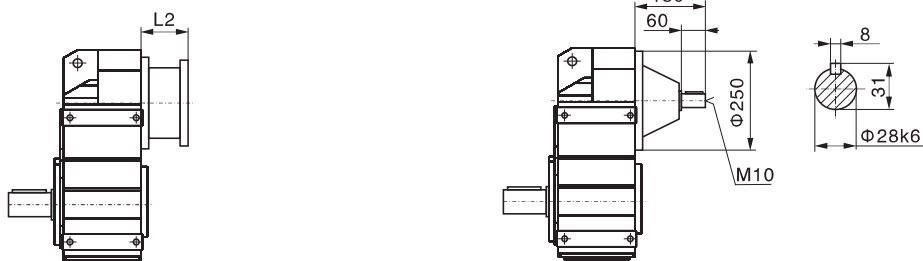


F97

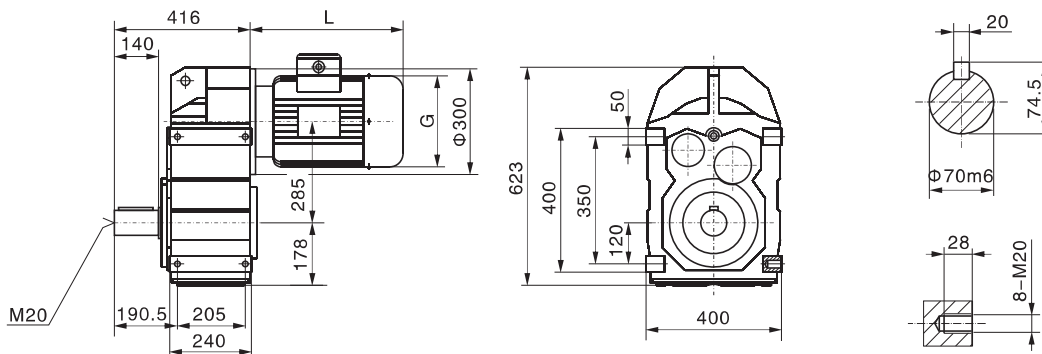

FA97


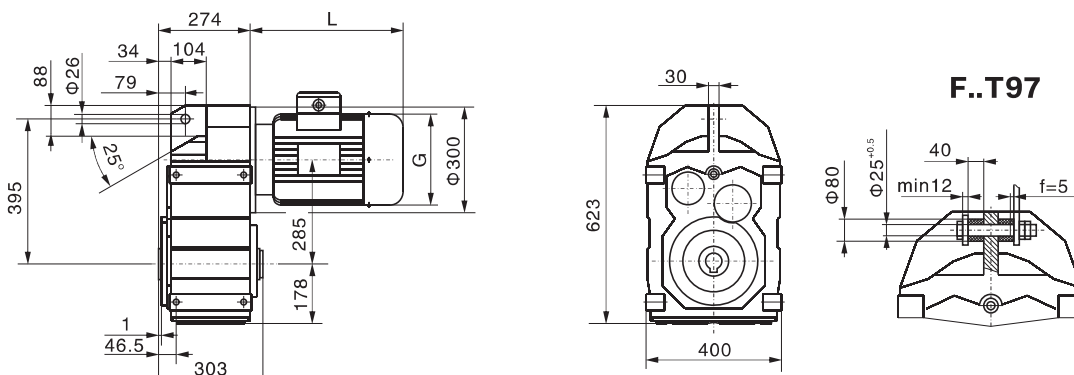


F..T97





上海承禹机电设备有限公司



FF97

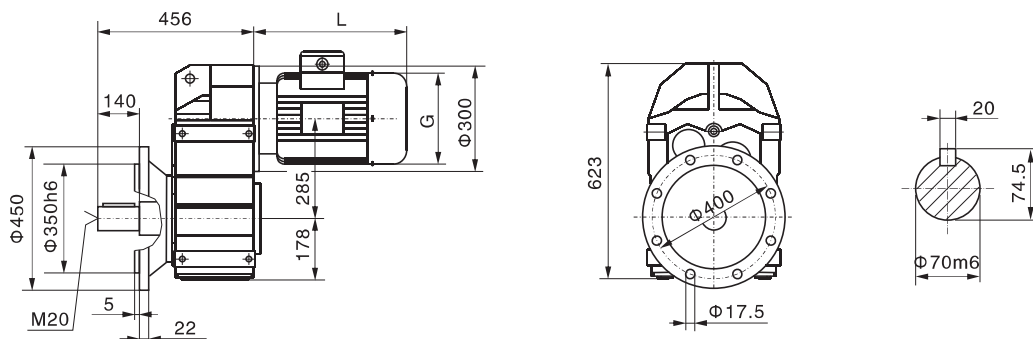



FAF97

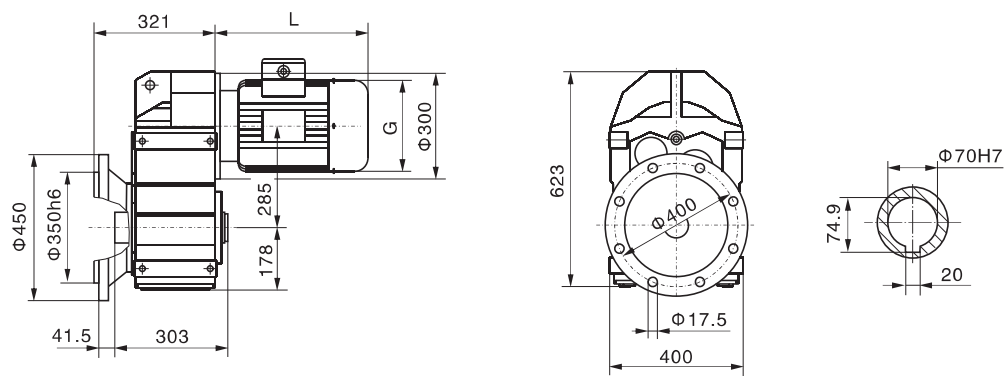



FAZ97

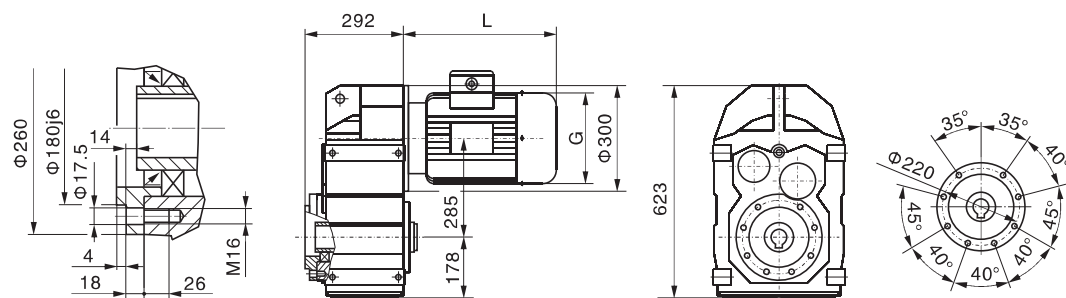





F..97 R57

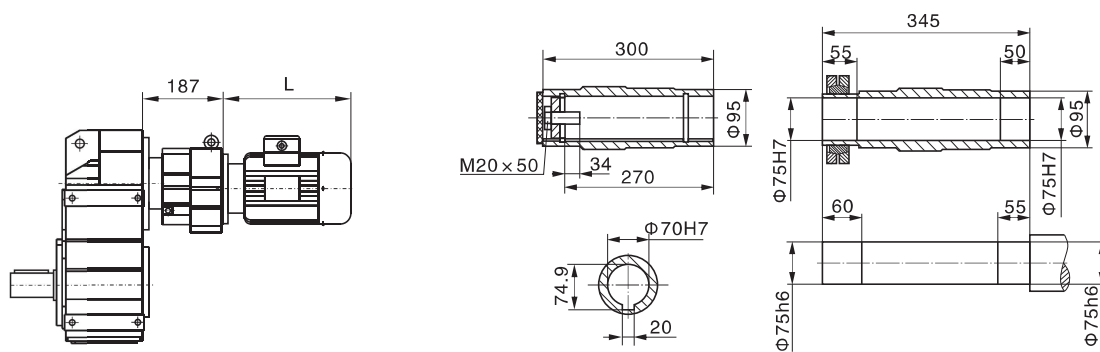





电机需方配或配特殊电机
时需加联接法兰

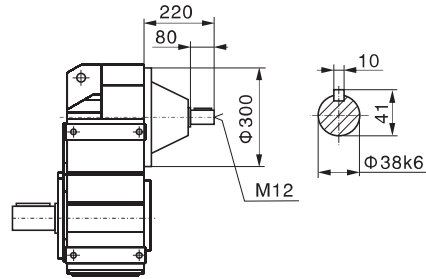

F..S97



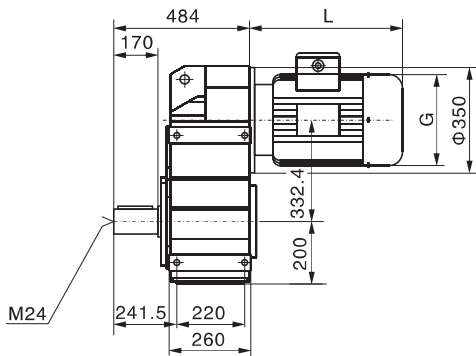



F107

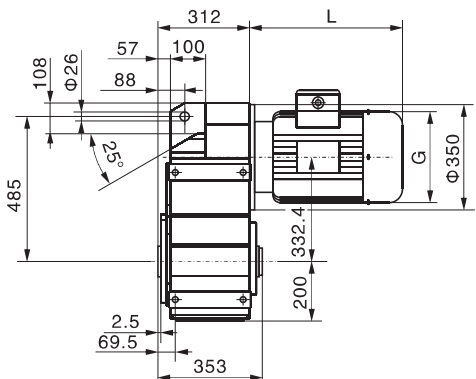


F..T107

FA107

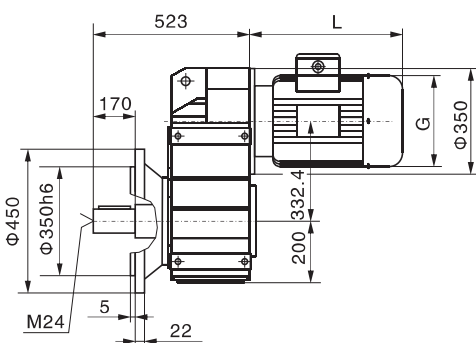



FF107





上海承禹机电设备有限公司



FAF107

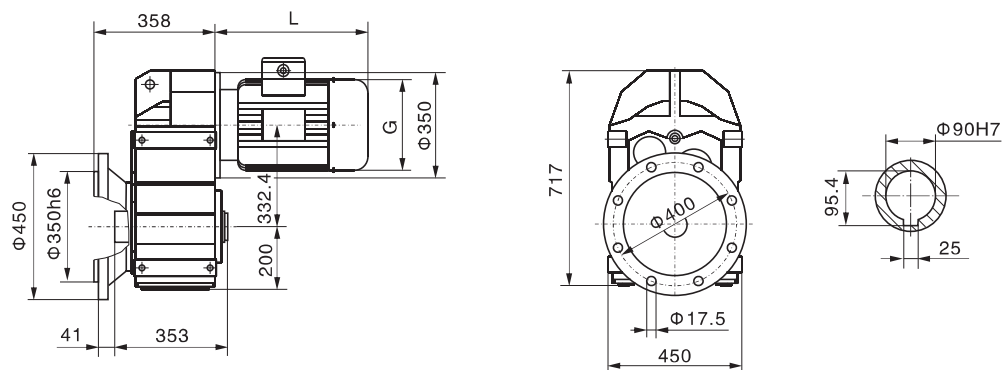



FAZ107

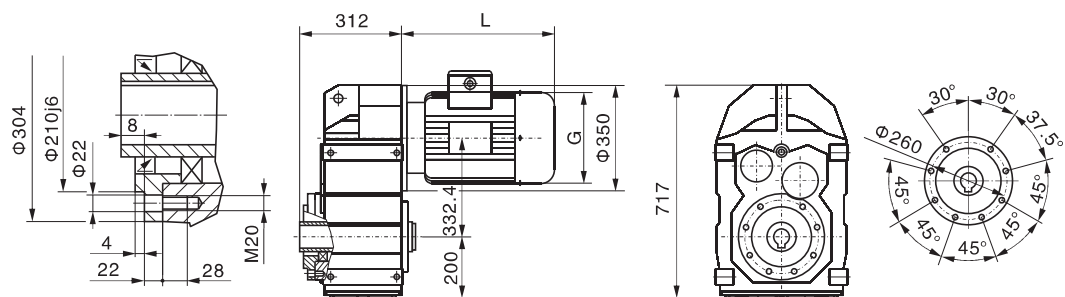


F..107 R77


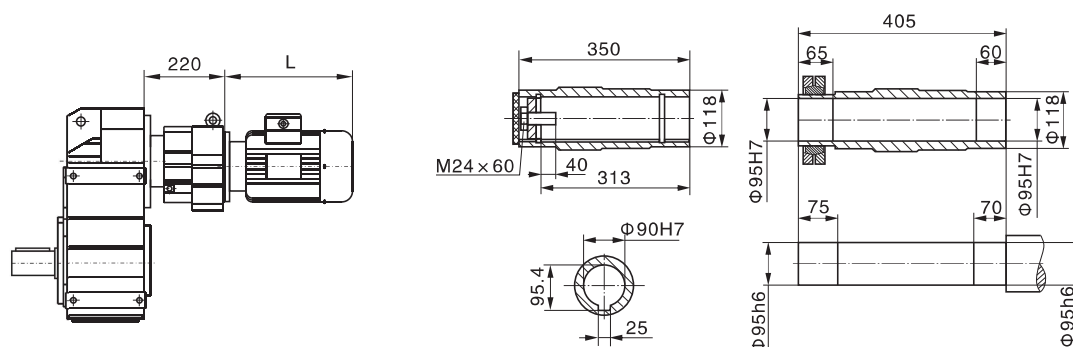



F..S107


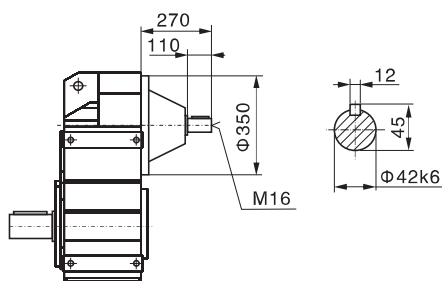



电机需方配或配特殊电机
时需加联接法兰




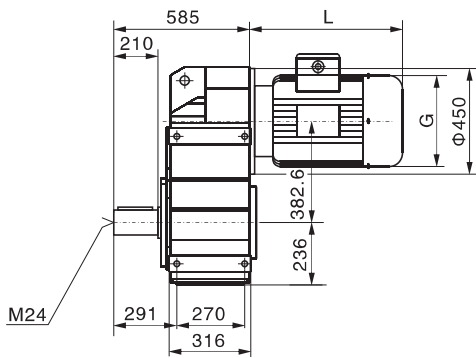










F127

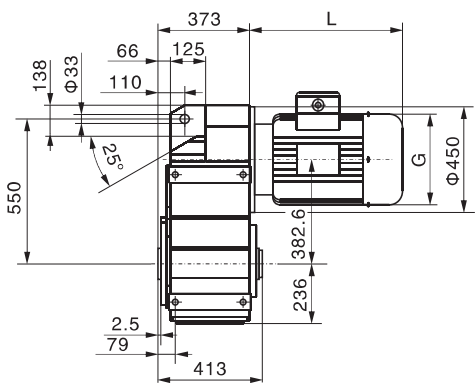



F..T127




FA127

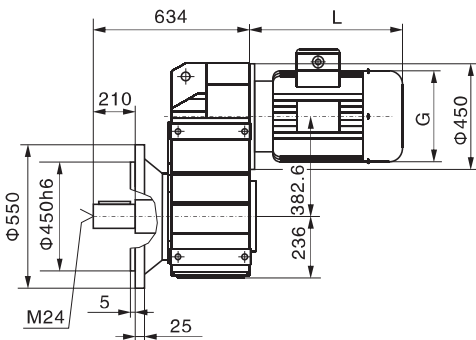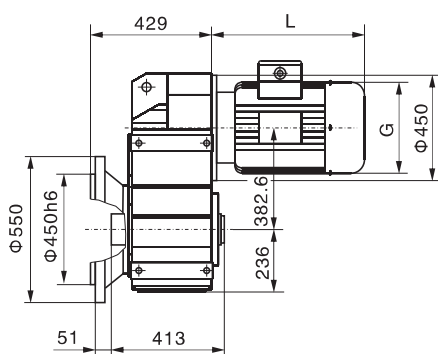**FF127****FAF127**



FAZ127

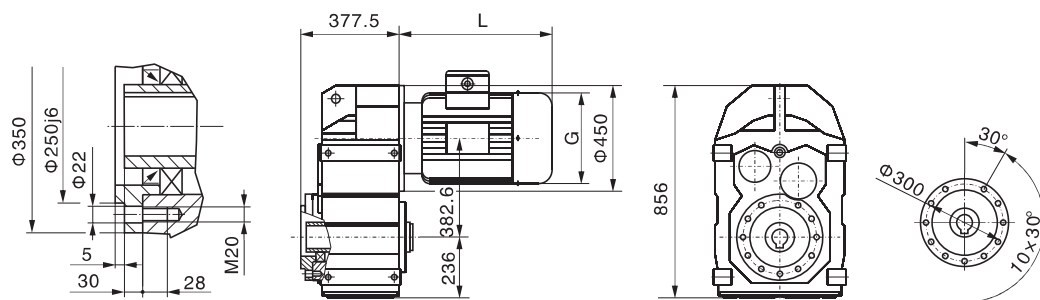


F..127 R77(87)

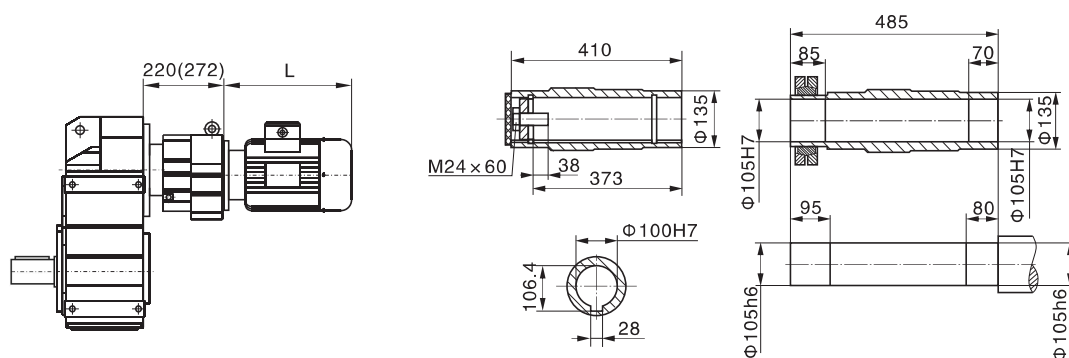



F..S127

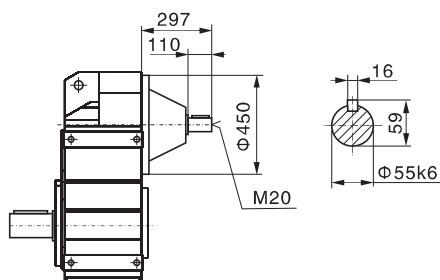



电机需方配或配特殊电机
时需加联接法兰





F157

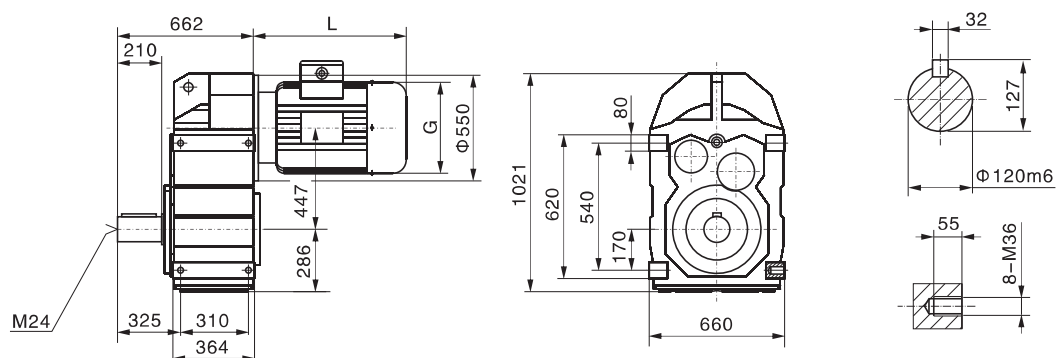





FA157

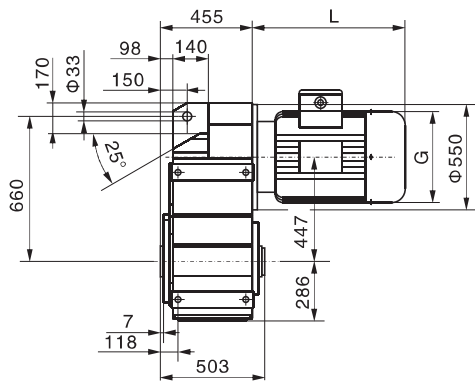





F..T157







FF157

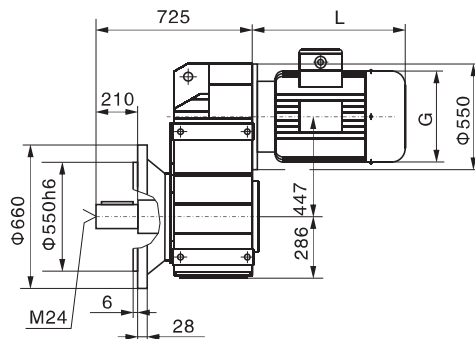




FAF157

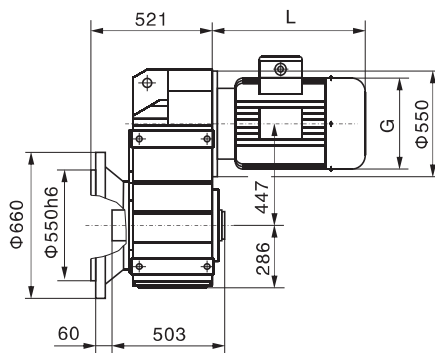



FAZ157

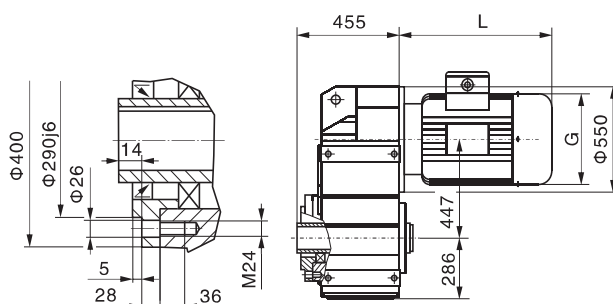

F..157 R97

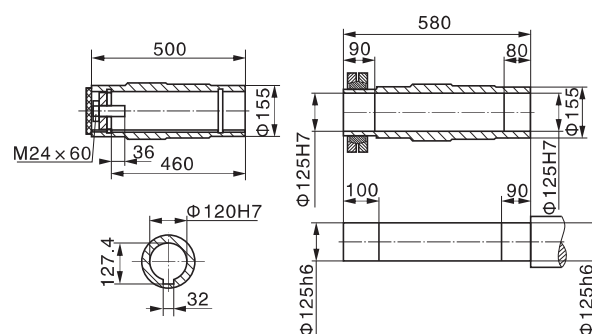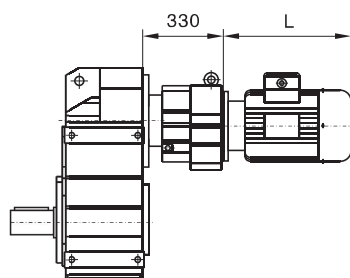

F..S157

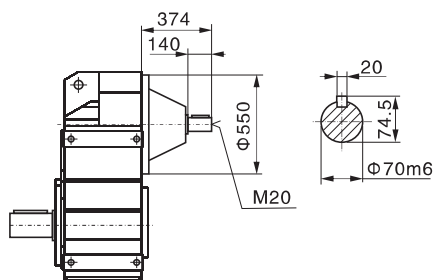

电机需方配或配特殊电机
时需加联接法兰

