



S系列斜齿-蜗轮减速器


S SERIES HELICAL-WORMGEARMOTOR

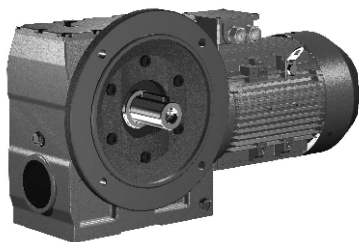


SF 型 Model SF
B5法兰安装圆柱蜗杆减速机
B5 flange-mounted helical-worm gear reductor

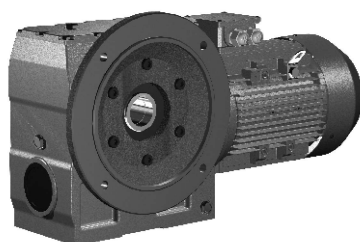


SAF 型 Model SAF
B5法兰空心轴安装圆柱蜗杆减速机
B5 flange-mounted helical-worm gear reductor with hollow shaft

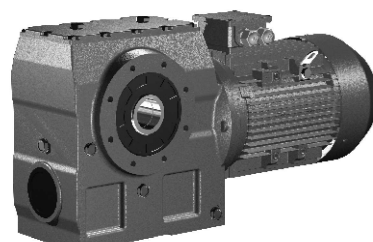


SA 型 Model SA
空心轴安装圆柱蜗杆减速机
Helical-worm gear reductor with hollow shaft

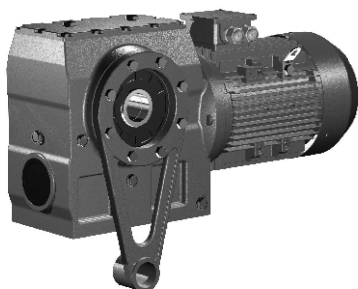


SAT 型 Model SAT
空心轴安装防转臂固定圆柱蜗杆减速机
Helical-worm gear reductor in torque-arm version with hollow shaft

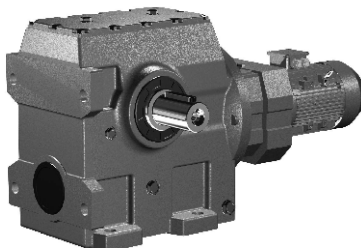


S.. R 型 Model S.. R
S系列与 R..7系列组合减速机
Combination of WS model and WR..7 model



S..S 型 Model S..S
输入轴型, 即配输入轴不配电动机的圆柱蜗杆减速机
Input-shaft style in another word helical-worm gear reductor equipped with input shaft but without the motor

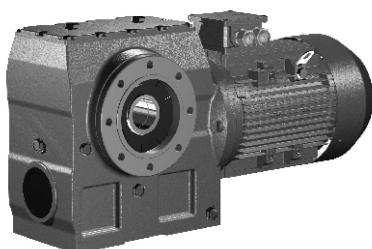

SAZ 型 Model SAZ
小法兰空心轴安装圆柱蜗杆减速机
Short-flange mounted helical-worm gear units with hollow shaft

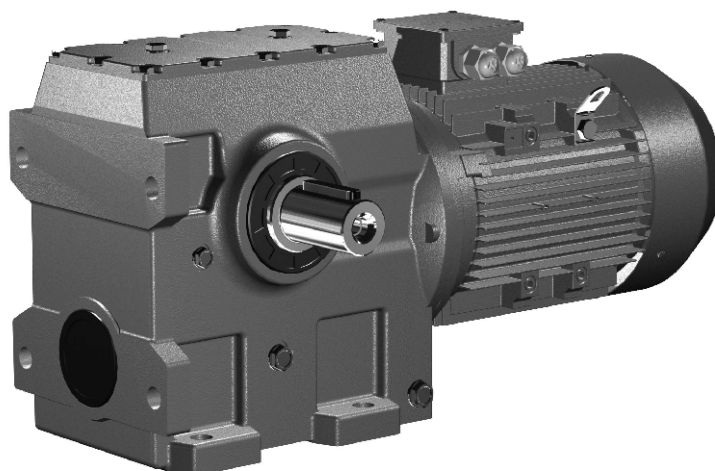

S 型 Model S
底脚安装圆柱蜗杆减速机
Foot-mounted helical-worm gear reductor

上海承禹机电设备有限公司

一、性能特点 Characteristics:

1. 承禹 减速机是在模块组合体系的基础上设计的, 可以方便地配用各种型式的电动机或采用其它动力输入。同种机型可配用多种功率的电动机。容易实现各种机型之间的组合联接。
2. 传动效率高, 单机型减速机效率高达96%。
3. 传动比划分细, 范围广。组合机型可以形成较大的传动比, 输出转速低。
4. 安装形式多样: 可任意底脚、B5法兰或B14 法兰安装, 底脚安装减速机有两个机加工的底脚安装平面。
1. chengyureductors are based on the building block design, so it's convenient for them to fit all types of motors or to connect with other power input. The same type of reducers can fit motors with different power, so that it's possible for different types of machines to combine or connect.
2. High transmission efficiency. A single machine can reach a transmission efficiency as much as 96%.
3. Precise division of transmission ratio with a wide range. The combination of machines can produce a larger transmission ratio at a low output rotational speed.
4. Various ways of installation. Horizontal installation at any position or flanged installation, The bottom feet installs the machine that deceleration machine have two bottom feet processes to install the flat surface.

二、场所条件 Working Environment:

1. 环境温度-40℃~50℃。(0℃以下启动时润滑油要加热到0℃以上。)
2. 海拔不超过1000米。
3. 输入转速不大于1800rpm, 齿轮最高圆周速度不超过22m/s。
4. 可用于正反运转。
5. 无行业限制。
6. 其他条件下使用请与我公司技术部联系。
1. Working temperature: -40℃~50℃ (The lubrication should be heated until above 0℃ if the machine works Below 0℃.)
2. The working place should be lower than 1,000 meters above sea level.
3. The input rotational speed should not exceed 1,800r/m. The circumferential speed of the gear should not exceed 20m/s.
4. Suitable for normal-reverse rotation.
5. Without industry limitation.
6. Please consult our technical supporting department for other circumstances.

三、选型指南 Instructions for Selection:

在确定使用系数之前必须先确定一天的运行小时数, 每小时的起停次数和负载类型。其中负载类型按下列公式计算:

The daily operating time, the starting frequency and the load classifications be determined before deciding the service factor. The load classifications is calculated with the following formula:

负载类型 Load classification

- I 均匀负载, 惯性加速系数 ≤ 0.2
- II 中等冲击负载, 惯性加速系数 ≤ 3
- III 强烈冲击负载, 惯性加速系数 ≤ 10
- Uniform load, mass acceleration factor ≤ 0.2
- Medium Impact Load, mass acceleration factor ≤ 3
- Heavy shock Load, mass acceleration factor ≤ 10

如果惯性加速系数 > 10 , 请与我公司技术部联系。

$$\text{惯性加速系数} = \frac{\text{所有外部转动惯量}}{\text{驱动电机的转动惯量}}$$

实际的工况系数 f_A 必须满足下式: 使用系数 $f_B \geq$ 工况系数 f_A

使用系数 f_B 已在后面的选型参数表中列出。

允许的轴伸径向载荷及轴向载荷

输出轴端允许的径向载荷及轴向载荷资料, 请与我公司技术部联系。

减速机的使用与维护请参阅随机附带的《减·变速机使用说明书》。

Please contact our technical supporting department in case the mass acceleration factor >10 .

$$\text{Mass acceleration factor} = \frac{\text{All external mass moments of Inertia}}{\text{Mass moment of inertia on the motor end}}$$


The actual operating mode factor (f_A) should meet the following formula: Service factor $f_B \geq$ operating mode factor f_A

The service factor f_B is listed in the parameter selection list.

The permitted overhung loads and the axial forces.


Please contact our technical supporting department for the information on the permitted overhung loads and the axial forces at the output end of the shaft.

Regarding the use and maintenance of the reducer, please refer to the attached Instruction Manual of the Reductor and the Variable Speed Motor.

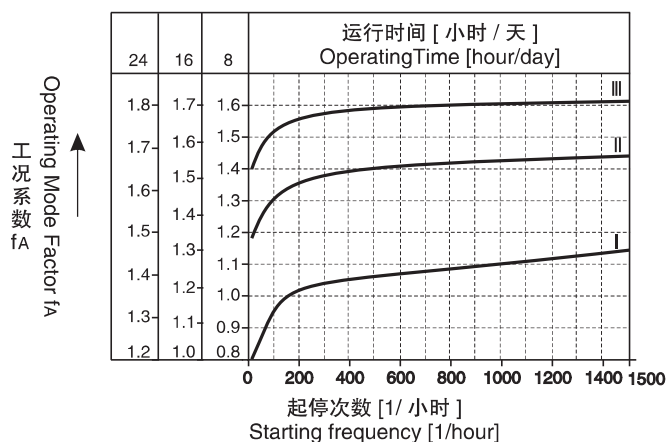

四、结构形式 Mounting type:

S系列结构图:/ S series structrue drawing:

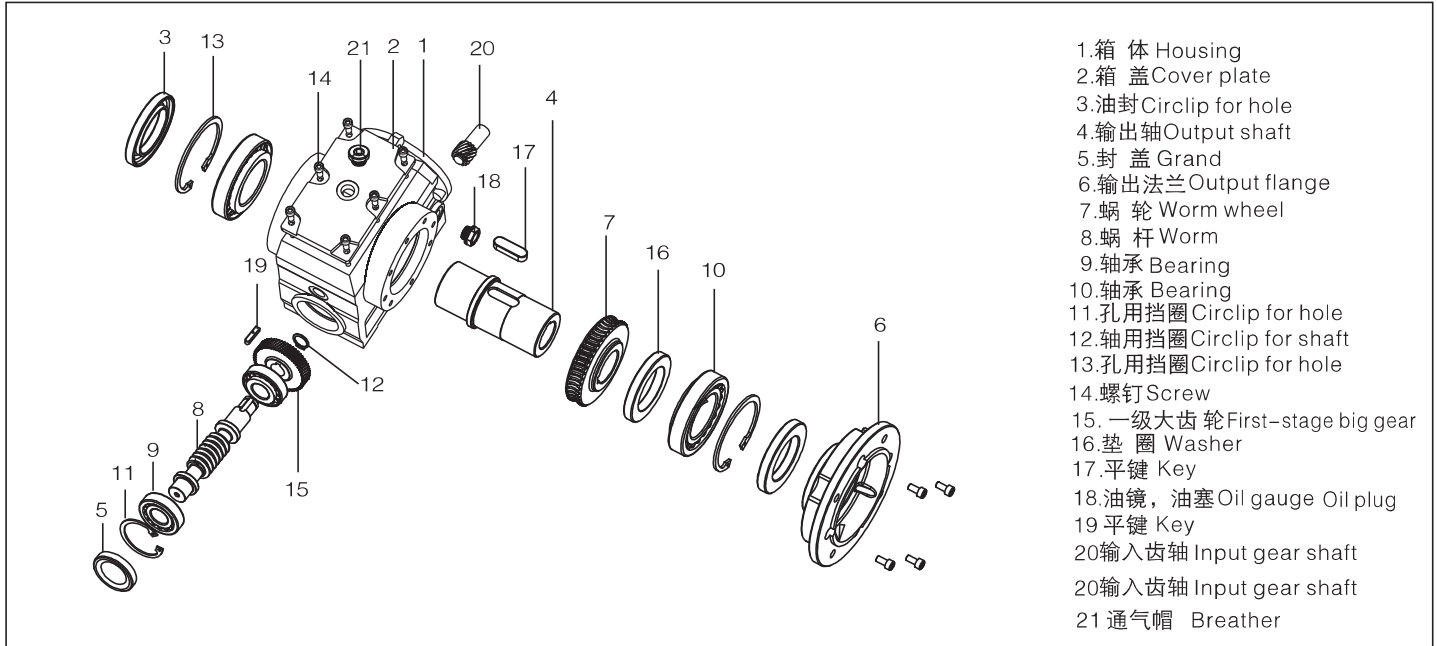


S系列斜齿轮蜗轮减速器型号规格及机型表示方法:

本系列减速器的型号规格有: S(37、47、57、67、77、87、97)
等7种, 减速比有 6.8~288 等多种速比, 可分别配
置0.18~37kW。


Type,specification and model notation for s series helical
gear peed reducers.:

Types,specifications of this series speed reducer have 7 kinds including
S37、47、57、67、77、87、97 etc, speed reducing ratio:6.8~288,
which can be allocated to 0.18~37kW.

五、型号说明 Instructions for Models:

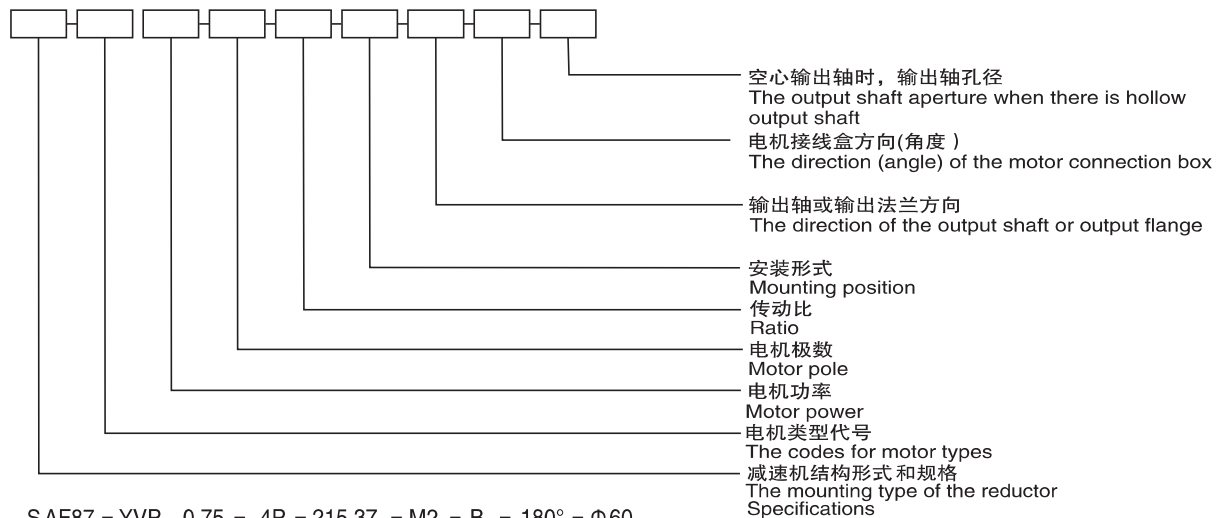

例:

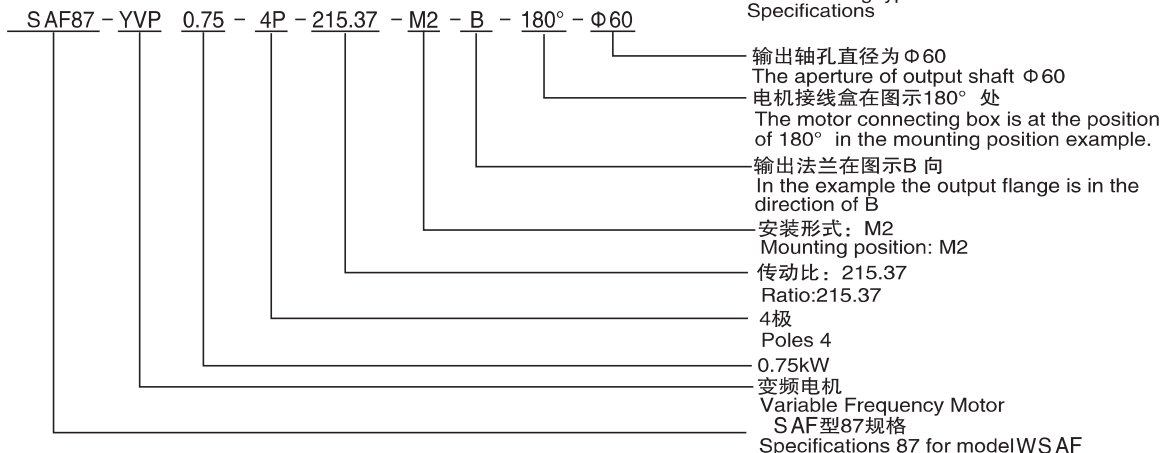

上海承禹机电设备有限公司

- 注：1.输入轴型没有电动机的各项内容。
2.无特别说明时Y系列电动机供货按IP54防护等级。
3.不注明安装形式时，按安装形式图中M1安装形式供货。
4.不注明接线盒角度时，按安装形式图中0度位置供货。
5. S、 SF、 SAF、 SAZ减速机不注明输出轴或输出法兰方向时，按安装形式图中A向供货。
6.对输出旋转方向与输入旋转方向有特殊要求的用户，请与我公司技术部联系。
7.电机尺寸请查看电机外型尺寸表。

- Note:1. The input-shaft style is not equipped with any motor
2. Motors of Y series are supplied with protection grade of IP54 unless otherwise specified.
3. The mounting position of M1 as shown in the mounting position example is the default way when supplying unless otherwise specified.
4. 0° as shown in the mounting position example is the default connection box angle when supplying unless otherwise specified.
5. The mounting position of A as shown in the mounting position example is the default way when supplying reducers such as S、 SF、 SAF、 SAZ model unless otherwise specified.
6. Please contact our technical supporting department in case there's any special requirements on the output and input rotatory directions.
7. About Motor size, please check table of motor's dimensions.

六、电机类型代号 Codes for Motor Types:

Y系列 Y series	Y	防爆电机 Flame-proof Motor	YB	直流电机 Direct Current Motor	Z
制动电机 Brake Motor	YEJ	辊道电机 Roll Motor	YG	变频电机 Variable Frequency Motor	YVP

七、联接法兰L2长度 Length of Connect Flange L2

S..系列圆柱蜗杆减速机联接法兰L2长度表
The form on length of the connect flange L2 of the helical-worm gear reductor of S.. Series

减速机型号 Reductor type	电机机座号 Motor frame size	63	71	80	90	100	112	132	160	180
S..37		61.5	61.5	80	80	—	—	—	—	—
S..47		61.5	61.5	80	80	98	—	—	—	—
S..57		61.5	61.5	80	80	98	—	—	—	—
S..67		56	56	74.5	74.5	90.5	90.5	123	—	—
S..77		50	50	68.5	68.5	82.5	82.5	111	152.5	—
S..87		—	—	63.5	63.5	78.5	78.5	106	147.5	147.5
S..97		—	—	57.5	57.5	72.5	72.5	101	142.5	142.5

八、安装形式图释义 Explanation of mounting position example


	通气孔 Breather valve		油位孔 Oil level plug		放油孔 Oil drain plug
---	-----------------------	---	-----------------------	---	-----------------------

九、选型参数表释义 Explanation of Parameter Selection List

电机功率 Power (kW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (i)	使用系数 Service factor (fB)	机型号 Type	电机组数 Motor pole	重量 Weight (kg)
0.75	4.8	972	292.00	2.2	S 87	4P	121
	5.3	886	264.00	2.4	SA 87	4P	119
	5.7	830	245.88	2.6	SF 87	4P	141
	6.0	780	229.78	2.8	SAF87	4P	136
	6.5	736	215.37	2.9			
	6.9	696	202.40	3.1			

- 1.选型参数表中的机型可与该栏中的任一传动比搭配。
2.选型参数表中的参数也适用于 SAZ、 SAT机型。
1.The machine types in the parameter selection list can match any transmission ratio in the column.
2.The parameters in this list also fits model SAZ、 SAT.

S系列安装方位图/ S series installation direction diagram

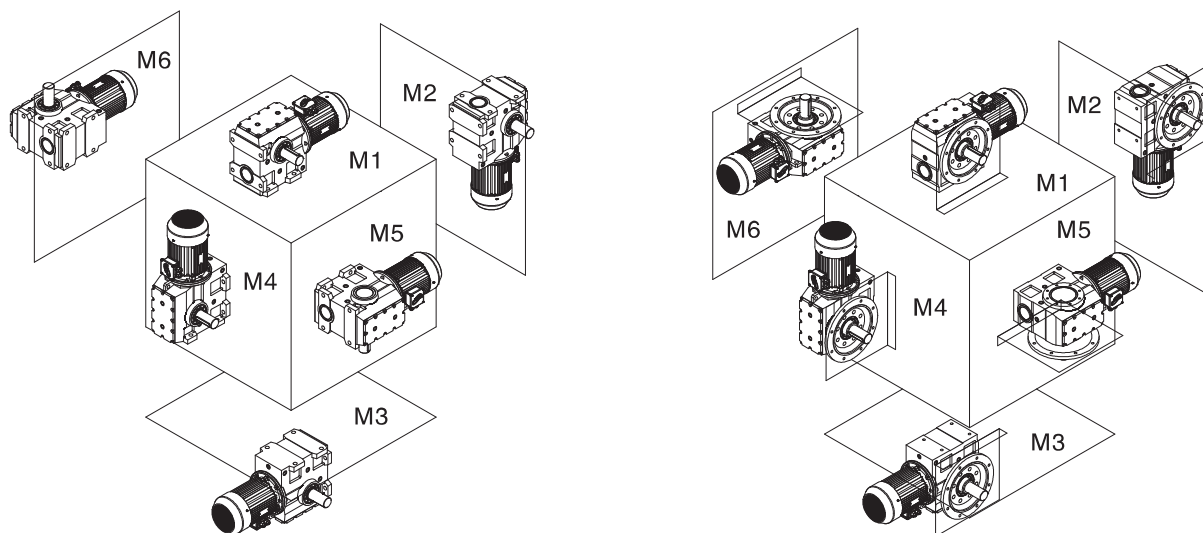

S系列油量表(单位kg) / S series oil capacity table (Unit:kg)

安装方位 机型号	M1	M2	M3	M4	M5	M6
S37	0.2	0.3	0.4	0.5	0.3	0.3
S47	0.3	0.6	0.5	0.8	0.6	0.6
S57	0.5	1	0.9	1.3	1.1	1.1
S67	0.8	1.9	2	2.7	2.2	2.2
S77	1.6	3.5	3.1	5	3.7	3.7
S87	2.6	6.5	5.5	9.6	6.7	6.7
S97	5.3	11.7	10.5	17.6	13.3	13.3

S系列重量表 / S series weight table

机型号/Type	S37	S47	S57	S67	S77	S87	S97
重量kg/Weight kg	7.5	10	13.5	27	45	86	150



注：表中重量为不加油时重量，带输入轴、输入法兰另加10%；带电机根据所配规格另加。

Note: Weight in the table means the weight when oil is not added. When input shaft is furnished, 10% weight should be added; If there is a motor, please add weight according to motor type.

上海承禹机电设备有限公司



S37-97 安装形式图

S37-97 Mounting position example

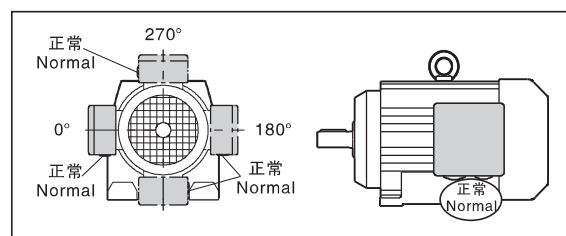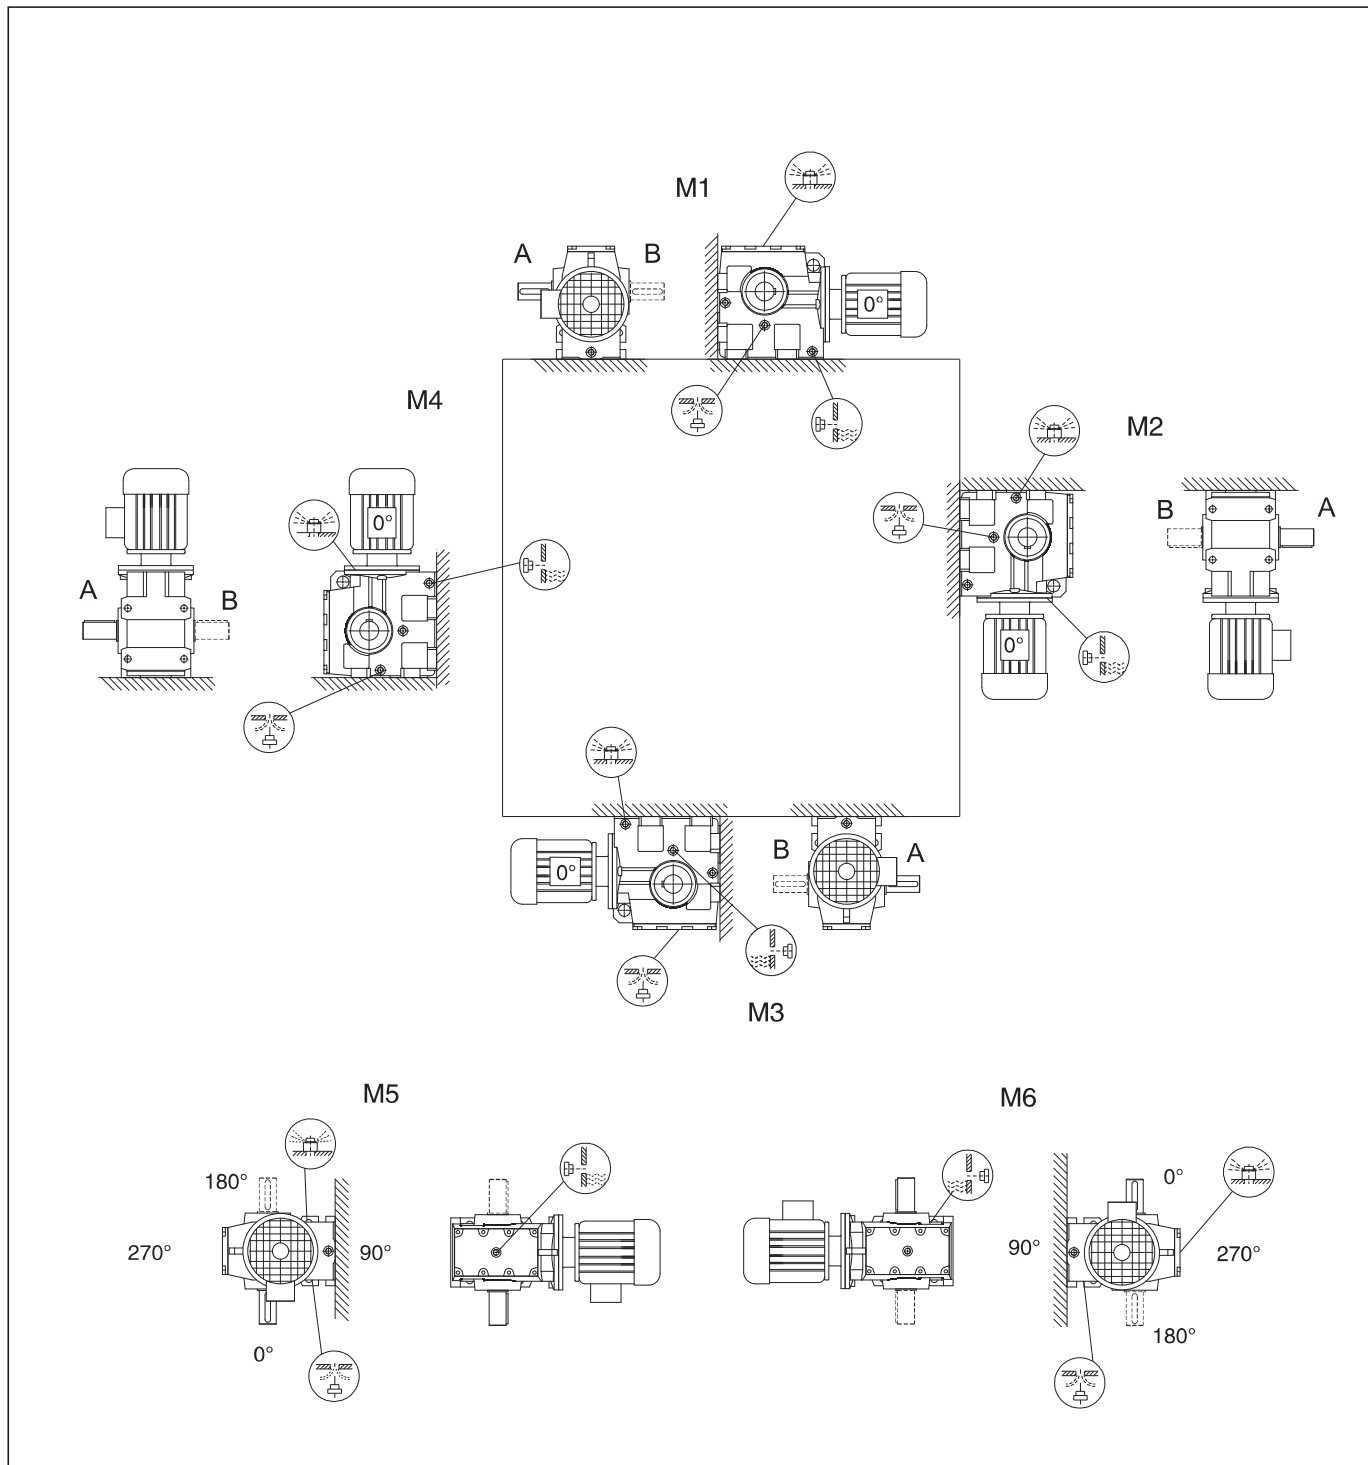

SF/ SAF/ SAZ37-97 安装形式图



SF/ SAF/ SAZ37-97 Mounting position example

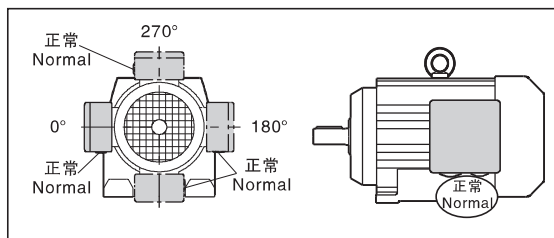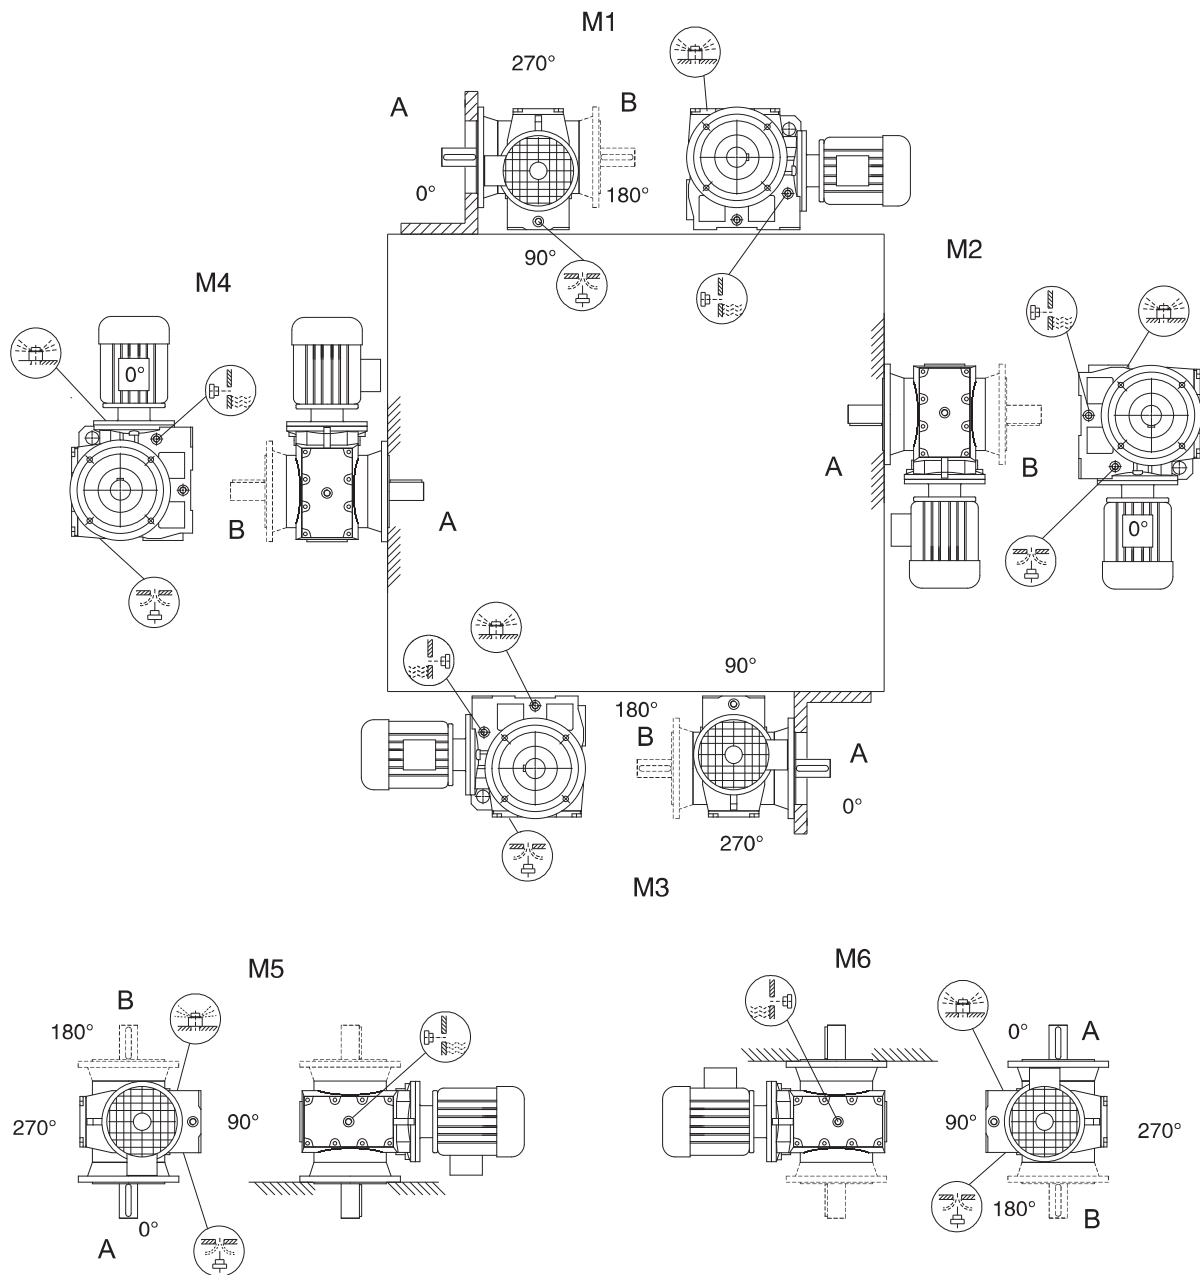

上海承禹机电设备有限公司

SAT37-97 安装形式图

SAT37-97 Mounting position example

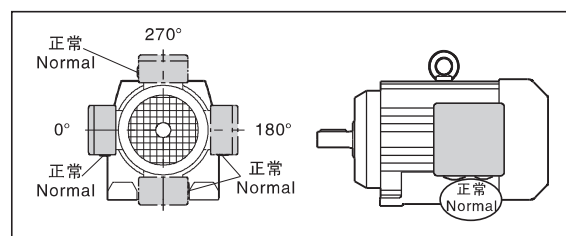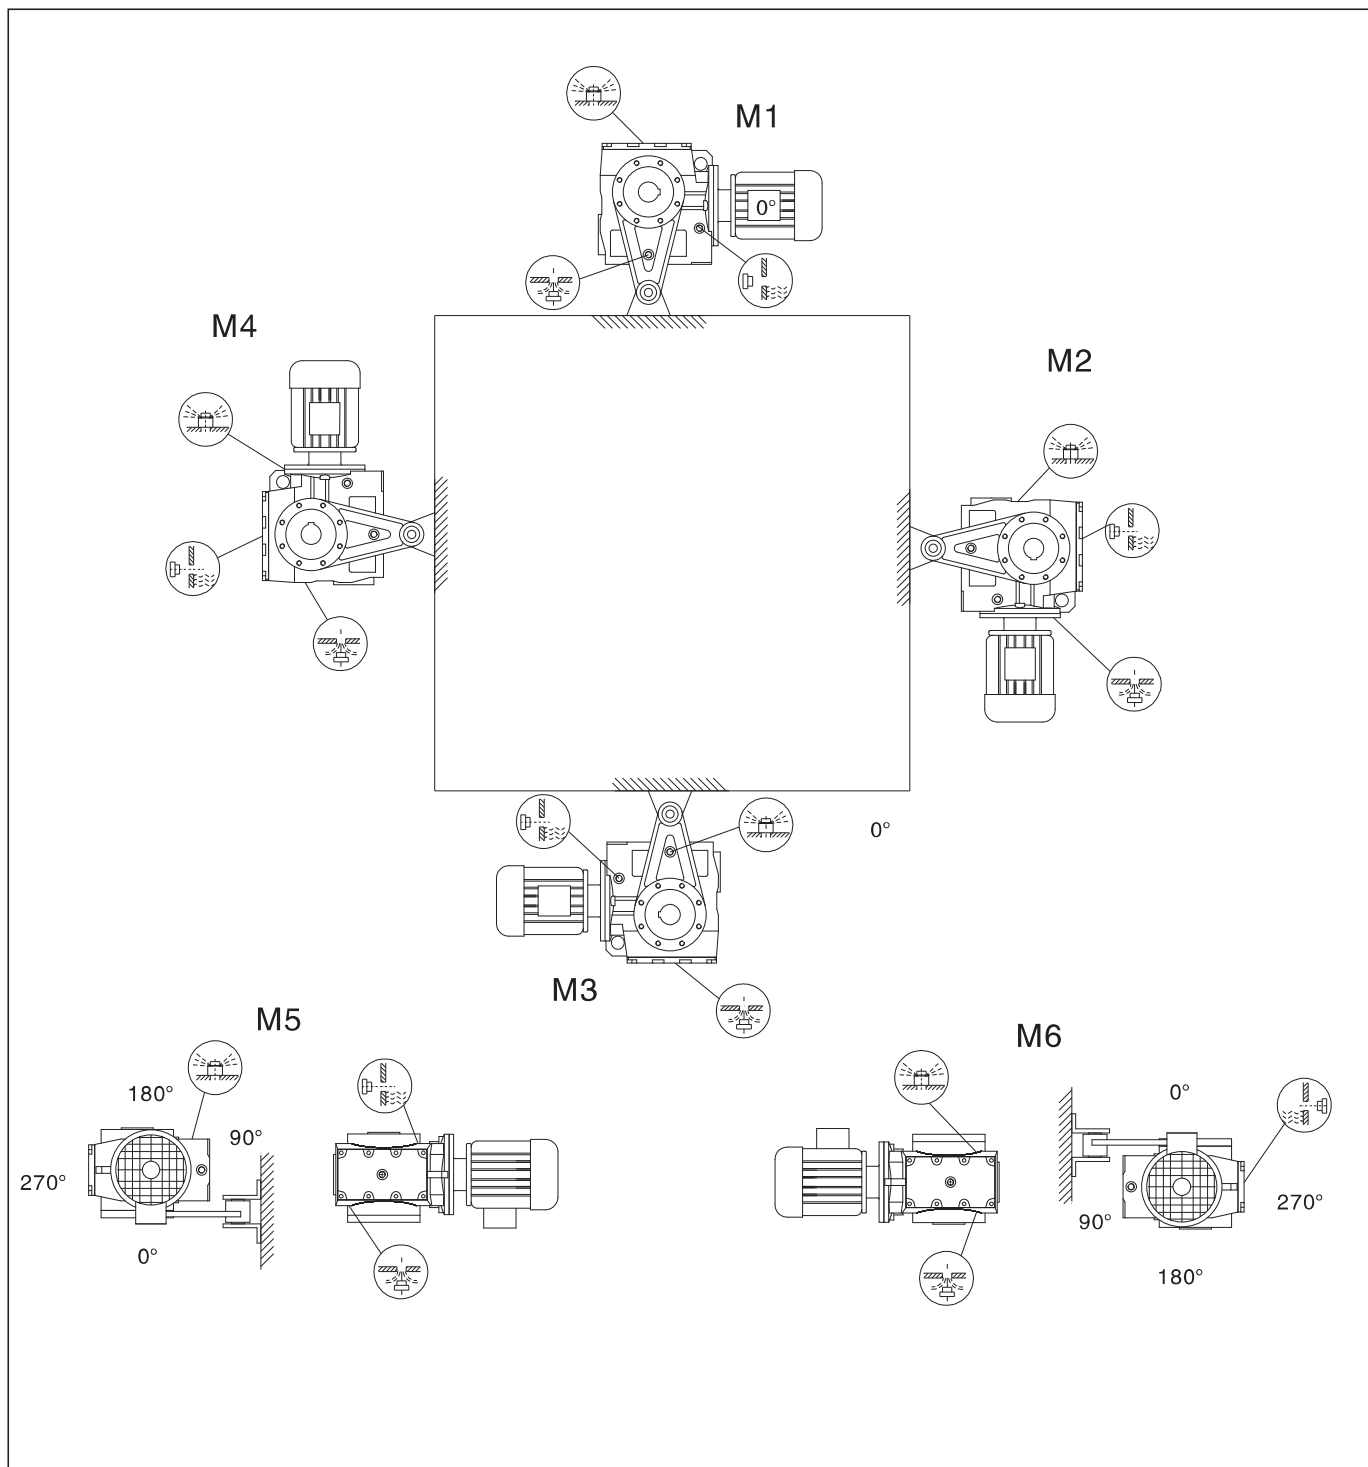

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole
0.12KW						0.12KW					
0.12	4610	11267	0.90	S97	R57	6.9	95	201.00	1.80		
0.14	4210	10078	1.00	SF97	R57	7.5	89	184.80	1.90	S47	
0.16	3500	8608	1.20	SA97	R57	8.7	77	158.12	2.2	SF47	
0.18	3090	7554	1.35	SAF97	R57	10	68	137.05	2.5	SA47	4P
						11	64	128.10	2.6	SAF47	
						12	57	110.73	3.0		
0.18	3120	7643	0.80			5.7	107	157.43	0.85		
0.21	2630	6706	0.95	S87	R57	6.2	99	144.40	0.95	S37	
0.23	2330	5875	1.05	SF87	R57	7.3	86	122.94	1.05	SF37	
0.27	1960	5187	1.25	SA87	R57	8.5	76	106.00	1.20	SA37	6P
0.30	1740	4606	1.45	SAF87	R57	9.1	71	98.80	1.30	SAF37	
0.36	1450	3872	1.70			10	64	86.36	1.45		
0.39	1340	3540	0.95			8.8	74	157.43	1.25		
0.45	1170	3098	1.10			9.6	68	144.40	1.35		
0.58	1280	2374	0.95	S77	R37	11	60	122.94	1.55		
0.66	1130	2083	1.10	SF77	R37	13	52	106.00	1.70		
0.76	960	1813	1.30	SA77	R37	14	49	98.80	1.75		
0.79	910	1745	1.35	SAF77	R37	16	44	86.36	1.95		
0.86	840	1600	1.50			17	41	80.96	2.1		
0.98	735	1404	1.70			19	37	71.44	2.3		
1.1	645	1245	1.90			22	33	63.33	2.5		
1.0	665	1363	0.85			25	35	55.93	2.3	S37	
1.2	575	1194	1.00			27	33	51.30	2.5	SF37	
1.3	515	1045	1.10			32	28	43.68	2.9	SA37	4P
1.5	445	914	1.30	S67	R37	37	25	37.66	3.2	SAF37	
1.7	400	809	1.40	SF67	R37	39	23	35.10	3.4		
1.9	355	712	1.60	SA67	R37	45	20	30.68	3.7		
2.2	295	615	1.95	SAF67	R37	48	19	28.76	3.9		
2.5	265	543	2.2			54	17	25.38	4.3		
2.9	220	469	2.6			61	15	22.50	4.8		
3.3	197	424	2.9			69	14	19.89	3.6		
3.8	180	365	3.2			76	13	18.24	3.9		
						89	11	15.53	4.4		
2.1	315	655	0.95			0.18KW					
2.4	275	574	1.10			0.29	2970	4606	0.85		
2.7	240	506	1.25	S57	R17	0.34	2480	3872	1.00		
3.2	210	438	1.45	SF57	R17	0.38	2350	3475	1.05		
3.6	183	388	1.65	SA57	R17	0.45	1970	2905	1.10	S87	R57
4.1	163	336	1.85	SAF57	R17	0.51	1710	2586	1.25	SF87	R57
4.7	140	294	2.1			0.57	1520	2335	1.45	SA87	R57
5.1	134	269	2.2			0.64	1320	2054	1.90	SAF87	R57
						0.72	1170	1824	2.1		
3.2	210	438	0.90			0.81	1050	1631	2.4		
3.6	183	388	1.00			0.94	1220	1404	1.00		
4.1	162	336	1.15	S47	R17	1.1	1070	1245	1.15		
4.7	139	294	1.35	SF47	R17	1.2	990	1100	1.25	S77	R37
5.4	95	257	1.95	SA47	R17	1.4	850	954	1.45	SF77	R37
6.0	113	229	1.65	SAF47	R17	1.6	745	837	1.65	SA77	R37
6.9	99	200	1.90			1.9	625	714	2.0	SAF77	R37
7.4	92	187	2.0			2.1	555	637	2.2		
						2.3	500	574	2.5		
6.8	99	202	0.95			1.6	660	809	0.85		
7.7	88	179	1.05	S37	R17	1.9	580	712	1.00	S67	R37
8.7	78	158	1.15	SF37	R17	2.2	490	615	1.15	SF67	R37
9.6	72	144	1.25	SA37	R17	2.4	440	543	1.30	SA67	R37
12	59	118	1.55	SAF37	R17	2.8	370	469	1.55	SAF67	R37
13	55	110	1.65			3.1	335	424	1.70		
						3.6	295	365	1.90		
4.5	143	201.00	2.1	S57		3.0	345	438	0.85	S57	R17
4.9	133	184.80	2.2	SF57		3.4	305	388	1.00	SF57	R17
5.7	116	158.12	2.5	SA57		3.9	270	336	1.10	SA57	R17
6.6	103	137.05	2.9	SAF57		4.5	235	264	1.30	SAF57	R17
						4.9	220	269	1.35		

上海承禹机电设备有限公司

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole
0.18KW						0.25KW					
5.8	188	229	1.60	S57	R17	0.45	2860	2905	0.85		
6.5	169	204	1.80	SF57	R17	0.50	2500	2586	1.00	S87	R57
7.1	154	187	1.95	SA57	R17	0.63	2240	2335	1.10	SF87	R57
				SAF57	R17	0.71	1950	2054	1.30	SA87	R57
						0.80	1550	1631	1.60	SAF87	R57
4.5	230	294	0.80			1.4	910	930	2.8		
5.1	158	257	1.15	S47	R47	1.4	1230	954	1.00	S77	R37
5.8	185	229	1.00	SF47	R47	1.5	1080	837	1.15	SF77	R37
6.6	162	200	1.15	SA47	R47	1.8	910	714	1.35	SA77	R37
7.1	152	187	1.20	SAF47	R47	2.0	810	637	1.55	SAF77	R37
8.0	134	165	1.40			2.3	730	574	1.70		
8.9	121	148	1.55			2.6	625	499	2.0		
10	108	131	1.70								
4.0	255	217.41	2.2	S67		2.4	635	543	0.90		
4.6	225	190.11	2.5	SF67	6P	2.8	540	469	1.05	S67	R37
4.8	215	180.60	2.6	SA67		3.1	485	424	1.15	SF67	R37
				SAF67		3.6	430	365	1.30	SA67	R37
4.3	220	201.00	1.35	S57		4.1	375	319	1.50	SAF67	R37
4.7	205	184.80	1.45	SF57	6P	4.6	330	281	1.75		
5.5	180	158.12	1.65	SA57							
6.3	159	137.05	1.85	SAF57		4.4	340	294	0.90		
6.6	154	201.00	1.90	S57		4.8	315	269	0.95	S57	R17
7.1	143	184.80	2.1	SF57	4P	5.7	270	229	1.10	SF57	R17
8.4	125	158.12	2.4	SA57		6.4	245	204	1.25	SA57	R17
9.6	110	137.05	2.7	SAF57		6.9	225	187	1.35	SAF57	R17
						7.9	198	165	1.50		
4.3	215	201.00	0.85	S47		9.9	159	131	1.90		
4.7	199	184.80	0.90	SF47	6P						
5.5	173	158.12	1.00	SA47		3.1	435	217.41	1.30	S67	
6.3	153	137.05	1.10	SAF47		3.6	390	190.11	1.45	SF67	
6.8	144	128.10	1.20			3.8	370	180.60	1.50	SA67	8P
						4.3	330	158.45	1.70	SAF67	
6.6	149	201.00	1.15			4.1	350	217.41	1.60	S67	
7.1	138	184.80	1.25			4.6	310	190.11	1.80	SF67	6P
8.4	121	158.12	1.40			4.9	295	180.60	1.90	SA67	
9.6	107	137.05	1.60	S47		5.6	265	158.45	2.1	SAF67	
10	100	128.10	1.65	SF47	4P						
12	88	110.73	1.90	SA47		6.0	245	217.41	2.1		
14	77	94.08	2.2	SAF47		6.8	220	190.11	2.4	S67	
16	69	84.00	2.4			7.2	210	180.60	2.5	SF67	4P
18	60	71.75	2.8			8.2	187	158.45	2.8	SA67	
19	69	69.36	2.2			9.7	161	134.40	3.2	SAF67	
						11	147	121.33	3.5		
						12	131	106.75	4.0		
8.4	115	157.43	0.80								
9.1	107	144.40	0.85			4.4	305	201.00	1.00		
11	93	122.94	1.00			4.8	285	184.80	1.05	S57	6P
12	82	106.00	1.10			5.6	245	158.12	1.20	SF57	
13	77	98.8	1.15			6.4	220	137.05	1.35	SA57	
15	68	86.36	1.25			6.9	205	128.10	1.45	SAF57	
16	64	80.96	1.30								
18	58	71.44	1.45			6.5	215	201.00	1.35		
21	52	63.66	1.60			7.0	200	184.80	1.45		
24	55	55.93	1.45			8.2	176	158.12	1.70	S57	
26	51	51.30	1.60			9.5	155	137.05	1.90	SF57	4P
30	44	43.46	1.85	S37		10	146	128.10	2.0	SA57	
35	38	37.66	2.1	SF37	4P	12	129	110.73	2.3	SAF57	
38	36	35.10	2.2	SA37		14	111	94.08	2.7		
43	32	30.68	2.4	SAF37		15	101	84.00	2.9		
46	30	28.76	2.5								
52	27	25.38	2.8			6.5	210	201.00	0.80		
59	24	22.50	3.1			7.0	195	184.80	0.85		
66	22	19.89	2.3			8.2	170	158.12	1.00		
72	21	18.24	2.5			9.5	150	137.05	1.10		
85	18	15.53	2.8			10	141	128.10	1.20		
99	15	13.39	3.2			12	124	110.73	1.35	S47	4P
106	14	12.48	3.4			14	108	94.08	1.55	SF47	
121	13	10.91	3.8			15	98	84.00	1.70	SA47	
129	12	10.23	4.0			18	85	71.75	1.95	SAF47	
						19	97	69.39	1.60		

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole		
0.25KW						0.37KW							
19	80	67.20	2.1	S47	4P	6.3	345	217.41	1.50	S67 SF67 SA67 SAF67	4P		
20	90	63.80	1.70	SF47		7.3	310	190.11	1.70				
24	78	54.59	2.0	SA47		7.6	295	180.60	1.75				
27	68	47.32	2.3	SAF47		8.7	260	158.45	2.0				
13	108	98.80	0.80	S37 SF37 SA37 SAF37	4P	10	225	134.40	2.3	S57 SF57 SA57 SAF57	6P		
15	96	86.36	0.90			11	205	121.33	2.5				
16	91	80.96	0.95			5.7	360	158.12	0.80				
18	81	71.44	1.05			6.6	315	137.05	0.95				
21	73	63.33	1.10			7.0	300	128.10	1.00	S57 SF57 SA57 SAF57	4P		
23	78	55.93	1.05			8.1	265	110.73	1.10				
25	72	51.30	1.15			9.6	230	94.08	1.30				
30	62	43.68	1.30			11	205	84.00	1.45				
35	54	37.66	1.45			6.9	305	201.00	0.95				
37	51	35.10	1.55			7.5	285	184.80	1.05				
42	45	30.68	1.70			8.7	245	158.12	1.20				
45	42	28.76	1.80			10	220	137.05	1.35				
21	37	25.38	2.0			11	205	128.10	1.45				
58	33	22.50	2.2			12	180	110.73	1.65				
65	32	19.89	1.65			15	156	94.08	1.90				
71	29	18.24	1.80			16	141	84.00	2.1				
84	25	15.53	2.0			19	122	71.75	2.4				
97	22	13.39	2.3			20	139	69.39	1.75				
104	20	12.48	2.4			21	115	67.20	2.5				
119	18	10.91	2.7	22	128	63.80	1.90						
127	19	10.23	2.8	S47 SF47 SA47 SAF47	4P	10	210	137.05	0.80				
144	15	9.02	3.1			11	199	128.10	0.85				
163	13	8.00	3.4			12	175	110.73	0.95				
191	11	6.80	3.8			15	151	94.08	1.10				
92	21	28.76	3.0			16	137	84.00	1.20				
105	19	25.38	3.3			19	119	71.75	1.40				
118	17	22.50	3.4			20	136	69.39	1.15				
134	16	19.89	2.8			21	112	67.20	1.50				
146	15	18.24	3.0			22	126	63.80	1.25				
171	13	15.53	3.4			25	109	54.59	1.40				
199	11	13.39	3.8			29	96	47.32	1.60				
213	10	12.48	4.0	31	90	44.22	1.75						
0.37KW						36	78	38.23	2.0	S47 SF47 SA47 SAF47	4P		
0.67	2810	2054	0.90	S87	R57	42	67	32.48	2.3				
0.76	2490	1824	1.00	SF87	R57	48	60	29.00	2.6				
0.85	2230	1631	1.10	SA87	R57	56	52	24.77	3.0				
1.5	1320	930	1.90	SAF87	R57	59	49	23.20	3.1				
1.7	1190	831	2.1	S67 SF67 SA67 SAF67	4P	68	46	20.33	2.4				
1.9	1290	714	0.95			78	40	17.62	2.8				
2.2	1150	637	1.10			84	37	16.47	3.0				
2.4	1040	574	1.20			22	103	63.33	0.80			S37 SF37 SA37 SAF37	4P
2.8	900	499	1.40			27	101	51.30	0.80				
3.2	785	438	1.60			32	87	43.68	0.95				
3.5	700	389	1.80			37	73	37.66	1.05				
3.8	615	365	0.95			39	71	35.10	1.10				
4.3	535	319	1.05			45	63	30.68	1.20				
4.9	470	281	1.20			48	59	28.76	1.30				
5.6	425	246	1.35			54	52	25.38	1.40				
2.4	980	288.00	2.5	61	47	22.50	1.55	S37 SF37 SA37 SAF37	4P				
2.6	890	258.18	2.8	69	44	19.89	1.20						
3.1	775	222.40	3.2	76	41	18.24	1.30						
3.0	735	225.26	1.75	89	35	15.53	1.45						
3.2	700	214.00	1.80	103	30	13.39	1.60						
3.6	630	189.09	2.0	111	28	12.48	1.70						
4.2	545	161.60	2.3	127	25	10.91	1.95						
4.1	505	217.41	1.10	135	23	10.23	2.0						
4.7	450	190.11	1.25	153	21	9.02	2.2						
5.0	430	180.60	1.30	173	18	8.00	2.5						
5.7	380	158.45	1.45	203	16	6.80	2.7						

上海承禹机电设备有限公司

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole
0.37KW						0.55KW					
104	28	25.38	2.2	S37 SF37 SA37 SAF37	2P	9.6	340	94.08	0.85	S57 SF57 SA57 SAF57	6P
118	25	22.50	2.3			11	305	84.00	0.95		
133	24	19.89	1.85			13	265	71.75	1.10		
145	22	18.24	2.0			13	250	67.20	1.15		
171	19	15.53	2.3			16	245	54.59	1.10		
198	16	13.39	2.5			19	215	47.32	1.25		
212	15	12.48	2.7			20	200	44.22	1.35		
243	13	10.91	3.0			24	176	38.23	1.55		
259	12	10.23	3.1								
294	11	9.02	3.3								
0.55KW						8.6	370	158.12	0.80	S57 SF57 SA57 SAF57	4P
1.0	2810	1332	0.90	9.9	330	137.05	0.90				
1.1	2540	1191	1.00	11	310	128.10	0.95				
1.3	2210	1032	1.15	12	270	110.73	1.10				
1.5	2040	930	1.25	14	235	94.08	1.25				
1.6	1840	831	1.35	16	210	84.00	1.40				
1.9	1600	719	1.55	19	184	71.75	1.55				
2.2	1400	624	1.80	20	174	67.20	1.65				
2.4	1270	558	1.95	25	167	54.59	1.45				
3.1	1010	435	2.4	29	146	47.32	1.70				
2.7	1380	499	0.90	S77 SF77 SA77 SAF77	4P	31	137	44.22	1.80	S47 SF47 SA47 SAF47	4P
3.1	1210	438	1.05			36	120	38.23	2.0		
3.5	1070	389	1.15			42	103	32.48	2.4		
4.2	910	327	1.35			47	92	29.00	2.7		
4.7	820	289	1.50			55	79	24.77	3.1		
5.4	710	250	1.75			59	75	23.20	3.3		
5.5	650	246	0.90	S67 SF67 SA67 SAF67	4P	67	69	20.33	2.4	S37 SF37 SA37 SAF37	2P
6.2	580	221	1.00			16	205	84.00	0.80		
6.9	530	198	1.10			19	179	71.75	0.95		
8.1	455	168	1.25			20	169	67.20	1.00		
2.4	1450	288.00	1.70	25	165	54.59	0.95				
2.6	1320	258.18	1.85	29	144	47.32	1.10				
3.1	1150	222.40	2.1	31	135	44.22	1.15				
3.1	1130	288.00	2.2	36	118	38.23	1.30				
3.5	1020	258.18	2.4	42	101	32.48	1.55				
4.1	900	222.40	2.7	47	91	29.00	1.70				
4.4	820	202.96	2.9	55	78	24.77	2.0				
3.0	1090	225.26	1.15	59	74	23.20	2.1				
3.2	1040	214.00	1.20	67	69	20.33	1.30				
3.6	930	189.09	1.35	77	60	17.62	1.85				
4.2	810	161.60	1.55	83	56	16.47	1.95				
3.5	960	256.47	1.35	96	49	14.24	2.2				
4.0	850	225.26	1.50	112	42	12.10	2.6				
4.2	810	214.00	1.55	126	37	10.80	2.9				
4.8	730	189.09	1.75	147	32	9.23	3.4				
5.6	635	161.60	2.0	44	94	30.68	0.80	S37 SF37 SA37 SAF37	4P		
5.3	660	256.47	1.90	47	89	28.76	0.85				
6.0	590	225.26	2.2	54	79	25.38	0.95				
6.4	560	214.00	2.3	60	70	22.50	1.05				
7.2	505	189.09	2.5	71	60	19.13	1.20				
6.3	520	217.41	1.00	88	53	15.53	0.95				
7.2	465	190.11	1.10	102	46	13.39	1.10				
7.5	445	180.60	1.15	109	43	12.48	1.15				
8.6	395	158.45	1.30	125	37	10.91	1.30				
10	340	134.40	1.55	133	35	10.23	1.35				
11	310	121.33	1.65	151	31	9.02	1.50	S37 SF37 SA37 SAF37	2P		
13	275	106.75	1.85	170	28	8.00	1.60				
13	265	100.80	1.95	200	24	6.80	1.80				
16	230	85.83	2.3	94	46	28.76	1.40				
18	230	75.06	2.1	106	41	25.38	1.50				
21	205	65.63	2.3	120	37	22.50	1.55				
				136	34	19.89	1.30				
				148	32	18.24	1.40				
				174	27	15.53	1.55				
				202	24	13.39	1.75				
				216	22	12.48	1.85				
				248	19	10.91	2.0				

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole		
0.55KW						0.75KW							
264	18	10.23	2.1	S37	2P	10	460	134.40	1.15	S67 SF67 SA67 SAF67	4P		
299	16	9.02	2.2	SF37		11	420	121.33	1.25				
338	14	8.00	2.5	SA37		13	375	106.75	1.40				
397	12	6.80	2.4	SAF37		14	355	100.80	1.40				
0.75KW						16	305	85.83	1.70			S57 SF57 SA57 SAF57	6P
1.1	4840	1223	0.85	S97 SF97 SA97 SAF97	R57	18	310	75.06	1.55				
1.3	4240	1070	1.00		R57	21	275	65.63	1.75				
1.5	3650	928	1.15		R57	22	260	62.35	1.85				
1.7	3230	824	1.30		R57	25	230	54.70	2.1				
1.9	2300	714	1.85		R57	30	198	46.40	2.4				
2.2	2450	626	1.70			13	365	71.75	0.80				
2.6	2110	538	2.0			13	345	67.20	0.85				
2.8	1900	484	2.2			16	295	56.61	1.00				
						19	295	47.32	0.90	S57 SF57 SA57 SAF57	6P		
						20	275	44.22	1.00				
						12	365	110.73	0.80			S57 SF57 SA57 SAF57	4P
						15	315	94.08	0.95				
						16	285	84.00	1.05				
						19	250	71.75	1.15				
						21	235	67.20	1.20				
						25	225	54.59	1.10				
						29	197	47.32	1.20				
						31	185	44.22	1.35				
						36	167	38.23	1.50				
						42	138	32.48	1.80				
						48	124	29.00	2.0				
						56	107	24.77	2.3				
						59	100	23.20	2.5				
						68	93	20.33	1.80				
						78	81	17.62	2.1				
						84	76	16.47	2.2				
						97	66	14.24	2.6				
						29	194	47.32	0.80	S47 SF47 SA47 SAF47	4P		
						31	182	44.22	0.85				
						36	159	38.23	1.00				
						42	136	32.48	1.15				
						48	122	29.00	1.25				
						56	106	24.77	1.45				
						59	99	23.20	1.55				
						68	93	20.33	1.20				
						78	81	17.62	1.35				
						84	76	16.47	1.45				
						97	66	14.24	1.65				
						114	56	12.10	1.95				
						128	50	10.80	2.2				
						150	43	9.23	2.5				
						160	41	8.64	2.7				
						190	34	7.28	3.0				
						72	81	19.13	0.85	S37 SF37 SA37 SAF37	4P		
						111	57	12.48	0.85				
						127	50	10.91	0.95				
						135	47	10.23	1.00				
						153	42	9.02	1.10				
						173	37	8.00	1.20				
						203	32	6.80	1.35	S37 SF37 SA37 SAF37	2P		
						141	43	19.13	1.05				
						174	37	15.53	1.15				
						202	32	13.39	1.30				
						216	30	12.48	1.35				
						248	26	10.91	1.50				
						264	25	10.23	1.55				
						299	22	9.02	1.65				
						338	19	8.00	1.80				
						397	17	6.80	1.75				

上海承禹机电设备有限公司

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole
1.1KW						1.1KW					
1.7	4720	824	0.90			20	360	71.75	0.80		
2.0	3370	714	1.25	S97	R57	21	340	67.20	0.85		
2.2	3590	626	1.15	SF97	R57	25	290	56.61	0.90		
2.6	3090	538	1.35	SA97	R57	30	285	47.32	0.85		
2.9	2790	484	1.50	SAF97	R57	32	265	44.22	0.90		
3.3	2430	420	1.75			37	235	38.23	1.05	S57	
						43	200	32.48	1.25	SF57	
2.2	2820	624	0.90			48	179	29.00	1.35	SA57	4P
2.5	2550	558	1.00			57	154	24.77	1.60	SAF57	
2.9	2240	485	1.10			60	145	23.20	1.70		
3.2	2040	435	1.20	S87	R57	72	123	19.45	1.75		
3.7	1790	378	1.35	SF87	R57	79	117	17.62	1.45		
4.3	1560	323	1.55	SA87	R57	85	110	16.47	1.55		
5.0	1370	281	1.75	SAF87	R57	98	95	14.24	1.75		
5.5	1460	255	1.35			116	82	12.10	2.1		
6.3	1280	222	1.55			130	73	10.80	2.3		
6.8	1200	205	1.65			152	63	9.23	2.7		
6.4	1240	219	1.00	S77	R37	48	177	29.00	0.90		
				SF77	R37	57	153	24.77	1.00		
				SA77	R37	60	143	23.20	1.05		
				SAF77	R37	72	122	19.54	1.20	S47	
2.4	3030	286.40	1.40	S97		79	117	17.62	0.95	SF47	
2.6	2800	262.22	1.50	SF97		85	109	16.47	1.00	SA47	4P
2.9	2500	231.67	1.70	SA97		98	95	14.24	1.15	SAF47	
3.5	2160	196.52	1.95	SAF97		116	81	12.10	1.35		
						130	73	10.80	1.50		
3.2	2310	286.40	1.80	S97		152	63	9.23	1.75		
3.5	2130	262.22	1.95	SF97		162	59	8.64	1.85		
4.0	1900	231.67	2.2	SA97		192	50	7.28	2.1		
				SAF97							
3.2	2220	288.00	1.10	S87		175	54	8.00	0.85	S37	
3.6	2010	258.18	1.20	SF87		206	46	6.80	0.95	SF37	4P
4.1	1760	222.40	1.35	SA87						SA37	
4.5	1620	202.96	1.45	SAF87						SAF37	
4.9	1520	288.00	1.50			202	47	13.39	0.85		
5.4	1370	258.18	1.65	S87		216	44	12.48	0.90	S37	
6.3	1200	222.40	1.90	SF87		248	39	10.91	1.00	SF37	
6.9	1100	202.96	2.0	SA87		264	36	10.23	1.05	SA37	2P
7.8	990	180.00	2.2	SAF87		299	32	9.02	1.10	SAF37	
9.2	840	151.30	2.5			338	28	8.00	1.25		
						397	24	6.80	1.20		
6.2	1150	225.26	1.10			1.5KW					
6.5	1100	214.00	1.15			2.0	4590	714	0.90		
7.4	980	189.09	1.30			2.2	4890	626	0.85	S97	
8.7	850	161.60	1.50	S77		2.6	4220	538	1.00	SF97	R57
9.4	785	148.15	1.60	SF77		2.9	3810	484	1.10	SA97	R57
11	695	130.00	1.75	SA77		3.4	3310	420	1.25	SAF97	R57
11	665	123.20	1.80	SAF77		3.8	2990	376	1.40		
13	585	107.83	2.0			4.3	2630	327	1.60		
14	535	97.14	2.1								
16	470	85.22	2.3								
12	605	121.33	0.85			2.9	3060	485	0.80		
13	540	106.75	0.95			3.2	2780	435	0.90		
14	515	100.80	1.00			3.7	2450	378	1.00	S87	R57
16	445	85.83	1.15	S67		4.4	2130	323	1.15	SF87	R57
18	405	78.00	1.30	SF67		5.0	1870	281	1.30	SA87	R57
21	400	65.63	1.20	SA7		5.5	2000	255	1.00	SAF87	
22	380	62.35	1.25	SAF67		6.3	1750	222	1.15		
26	335	54.70	1.45			6.9	1630	205	1.20		
30	285	46.40	1.65								
33	260	41.89	1.85			2.4	4030	286.40	1.05	S97	
38	230	36.85	2.1			2.7	3720	262.22	1.15	SF97	
40	220	34.80	2.2			3.0	3330	231.67	1.25	SA97	8P
47	187	29.63	2.6			3.6	2870	196.52	1.45	SAF97	

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole		
1.5KW						1.5KW							
3.2	3150	286.40	1.35	S97	6P	99	129	14.24	1.30	S57	4P		
3.5	2910	262.22	1.45	SF97		117	110	12.10	1.55	SF57			
4.0	2600	231.67	1.60	SA97		131	99	10.80	1.70	SA57			
4.7	2230	196.52	1.90	SAF97		153	85	9.23	2.0	SAF57			
4.9	2130	286.40	1.90	S97	4P	99	129	14.24	0.85	S47 SF47 SA47 SAF47	4P		
5.4	1970	262.22	2.0	SF97		117	110	12.10	1.00				
6.1	1760	231.67	2.3	SA97		131	99	10.80	1.10				
7.2	1510	196.52	2.7	SAF97		153	85	9.23	1.30				
3.6	2740	258.18	0.90	S87	6P	163	79	8.64	1.35	S37 SF37 SA37 SAF37	2P		
4.1	2390	222.40	1.00	SF87		194	67	7.28	1.55				
4.5	2200	202.96	1.10	SA87		299	44	9.02	0.85				
5.1	1980	180.00	1.20	SAF87		338	39	8.00	0.90				
4.9	2060	288.00	1.10	S87 SF87 SA87 SAF87	4P	397	33	6.80	0.90	S97 SF97 SA97 SAF97	4P		
5.5	1860	258.18	1.20			2.2KW							
6.3	1630	222.40	1.40			3.4	4900	420	0.85			R57 R57 R57 R57	
6.9	1500	202.96	1.50			3.8	4410	376	0.95				
7.8	1340	180.00	1.65			4.3	3870	327	1.10				
9.3	1140	151.30	1.90			4.9	3420	287	1.25				
10	1060	139.05	2.0			5.6	3000	252	1.40			6P	
11	950	123.48	2.2			3.3	4530	286.40	0.95				
13	850	110.40	2.3	3.6	4180	262.22	1.00						
14	770	99.26	2.5	4.1	3730	231.67	1.15						
7.5	1330	189.09	0.95	S77 SF77 SA77 SAF77	4P	4.8	3210	196.52	1.30	S97 SF97 SA97 SAF97	4P		
8.7	1150	161.60	1.10			4.9	3130	286.40	1.30				
9.5	1060	148.15	1.15			5.4	2890	262.22	1.40				
11	940	130.00	1.30			6.1	2570	231.67	1.55				
11	900	123.20	1.35			7.2	2210	196.52	1.80				
13	795	107.83	1.45			7.8	2050	180.95	1.90				
15	725	97.14	1.60			8.7	1840	161.74	2.1				
17	640	85.22	1.70			9.7	1670	145.60	2.2				
19	650	75.09	1.70			11	1520	131.85	2.4				
20	620	71.33	1.80			12	1360	116.92	2.6				
21	510	66.67	2.0			13	1240	105.71	2.8				
22	550	63.03	2.0			16	1060	89.60	3.1				
25	440	56.92	2.3			5.5	2730	258.18	0.85			S87 SF87 SA87 SAF87	4P
26	470	53.87	2.3			6.3	2380	222.40	0.95				
29	435	49.38	2.5			6.9	2190	202.96	1.05				
33	385	43.33	2.9			7.8	1970	180.00	1.10				
16	600	85.83	0.85			9.3	1680	151.30	1.30				
18	550	78.00	0.95			10	1550	139.05	1.35				
21	540	65.63	0.90	11	1390	123.48	1.50						
23	515	62.35	0.95	13	1250	110.40	1.60						
26	455	54.70	1.05	14	1130	99.26	1.75						
30	390	46.40	1.25	16	990	86.15	1.90						
34	355	41.89	1.36	17	1030	81.76	1.50						
38	310	36.85	1.55	18	890	77.14	2.0						
41	295	34.80	1.60	20	920	70.43	1.75						
48	255	29.63	1.90	22	840	64.27	1.90						
52	230	26.93	2.1	25	750	57.00	2.1						
58	220	24.44	1.55	11	1390	130.00	0.85	S77 SF77 SA77 SAF77	4P				
61	210	23.22	1.60	11	1320	123.20	0.90						
69	186	20.37	1.85	13	1170	107.83	1.00						
82	159	17.28	2.1	15	1060	97.14	1.10						
90	144	15.60	2.4	17	940	85.22	1.15						
103	127	13.73	2.7	19	840	75.20	1.30						
43	270	32.48	0.90	S57 SF57 SA57 SAF57	4P	21	745			66.67	1.40		
49	245	29.00	1.00			22	810			63.03	1.35		
57	210	24.77	1.15			25	645			56.92	1.55		
61	196	23.20	1.25			26	695			53.87	1.60		
72	167	19.54	1.30			29	635			49.38	1.75		
80	159	17.62	1.05			33	560			43.33	1.95		
86	149	16.47	1.15			34	535			41.07	2.1		

上海承禹机电设备有限公司

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole		
2.2KW						3.0KW							
39	470	35.94	2.3	S77 SF77 SA77 SAF77	4P	16	1290	85.22	0.85	S77 SF77 SA77 SAF77	4P		
44	425	32.38	2.6			19	1150	75.20	0.95				
50	375	28.41	2.8			21	1020	66.67	1.00				
56	330	25.07	3.1			22	1110	63.03	1.00				
62	310	22.89	2.3			25	880	56.92	1.10				
67	285	20.99	2.5	26	950	53.87	1.15	S67 SF67 SA67 SAF67	4P				
30	570	46.40	0.85	28	880	49.39	1.25						
34	515	41.89	0.95	32	770	43.33	1.40						
38	460	36.85	1.05	34	735	41.07	1.50						
41	435	34.80	1.10	39	645	35.94	1.70						
48	370	29.63	1.30	43	585	32.38	1.85						
52	340	26.93	1.40	49	515	28.41	2.0						
60	295	23.33	1.60	56	455	25.07	2.2						
69	275	20.37	1.25	61	430	22.89	1.65						
82	235	17.28	1.45	67	395	20.99	1.80						
90	210	15.60	1.60	76	345	18.42	2.0						
103	186	13.73	1.85	80	330	17.45	2.2						
109	176	12.96	1.95	92	290	15.28	2.5						
128	151	11.03	2.3	102	260	13.73	2.7						
141	137	10.03	2.5	116	230	12.07	3.1						
162	119	8.69	2.8	131	205	10.65	3.5						
99						40	595	34.80	0.80	S67 SF67 SA67 SAF67	4P		
117						47	510	29.63	0.95				
131						52	465	26.93	1.05				
153						60	405	23.33	1.20				
163						69	375	20.37	0.90				
194						81	320	17.28	1.05				
90						290	15.60	1.15					
102						255	13.73	1.35					
108						240	12.96	1.40					
127						205	11.03	1.65					
140						188	10.03	1.80					
161						164	8.69	2.0					
185						143	7.56	2.1					
3.0KW						4.0KW							
4.9	4710	287	0.90	S97	R57	130	199	10.80	0.85	S57 SF57 SA57 SAF57	4P		
5.6	4140	252	1.00	SF97	R57	152	171	9.23	1.00				
6.4	3620	219	1.15	SA97	R57	162	160	8.64	1.05				
6.8	3400	205	1.25	SAF97	R57	192	136	7.28	1.10				
4.9						4290	286.40	0.95	4.0KW				
5.3	3960	262.22	1.00	S97 SF97 SA97 SAF97	4P	6.5	4780	219	0.90	S97 SF97 SA97 SAF97	R57 R57 R57 R57		
6.0	3530	231.67	1.15			6.9	4490	205	0.95				
7.1	3040	196.52	1.30			6.1	4650	231.67	0.85				
7.7	2810	180.95	1.40			7.2	3990	196.52	1.00	S97 SF97 SA97 SAF97	4P		
8.7	2530	161.74	1.50			7.8	3700	180.95	1.05				
9.6	2300	145.60	1.65			8.8	3330	161.74	1.15				
11	2090	131.85	1.75			9.8	3020	145.60	1.25				
12	1870	116.92	1.90			11	2750	131.85	1.35				
13	1700	105.71	2.0			12	2460	116.92	1.45				
16	1450	89.60	2.2			13	2230	105.71	1.55				
17	1470	80.85	2.2	16	1910	89.60	1.70						
7.8						18	1940	80.85	1.65			S87 SF87 SA87 SAF87	4P
9.2						20	1720	71.43	1.90				
10						23	1470	60.59	2.2				
11						25	1350	55.79	2.4				
13						12	2510	123.48	0.80				
14						13	2260	110.40	0.90				
16						14	2040	99.26	0.95				
17						16	1790	86.15	1.05				
18						18	1610	77.14	1.15				
20						20	1660	70.43	0.95				
22						22	1520	64.27	1.05				
25						25	1350	57.00	1.20				
29						30	1150	47.91	1.40				
32													
36													
40													




S

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole		
4.0KW						5.5KW							
32	1060	44.03	1.50	S87 SF87 SA87 SAF87	4P	35	1320	41.07	0.85	S77 SF77 SA77 SAF77	4P		
36	940	39.10	1.70			40	1160	35.94	0.95				
41	840	34.96	1.90			44	1050	32.38	1.05				
45	760	31.43	2.1			50	920	28.41	1.15				
52	665	27.28	2.4			57	820	25.07	1.25				
56	635	25.50	1.95			64	125	22.22	1.35				
25	1160	56.92	0.85	S77 SF77 SA77 SAF77	4P	78	625	18.41	1.15			S67 SF67 SA67 SAF67	4P
26	1250	53.87	0.90			82	590	17.45	1.20				
29	1150	49.38	0.95			94	520	15.28	1.35				
33	1020	43.33	1.10			104	470	13.76	1.50				
35	960	41.07	1.15			118	410	12.07	1.75				
40	850	35.94	1.30			134	365	10.65	2.0				
44	765	32.38	1.40			151	325	9.44	2.2				
50	675	28.41	1.55			177	275	8.06	2.5				
57	600	25.07	1.70			130	370	11.03	0.90	S67 SF67 SA67 SAF67	4P		
62	565	22.89	1.25			143	340	10.03	1.00				
68	520	20.99	1.35			165	295	8.69	1.15				
77	455	18.42	1.55			189	255	7.56	1.15				
81	435	17.45	1.65	S97 SF97 SA97 SAF97	4P	7.5KW							
93	380	15.28	1.85			14	4160	105.71	0.85				
103	345	13.76	2.1			16	3560	89.60	0.90				
118	300	12.07	2.4			18	3130	78.26	1.00				
133	265	10.65	2.7			20	3200	71.43	1.05				
150	235	9.44	3.1			22	2630	65.45	1.10				
176	205	8.06	3.3			24	2730	60.59	1.20				
82	420	17.28	0.80			26	2520	55.79	1.30				
91	380	15.60	0.90			29	2260	49.87	1.45				
103	335	13.73	1.00			32	2040	44.89	1.60				
110	320	12.96	1.05			35	1850	40.65	1.80				
129	270	11.03	1.25			40	1650	36.05	2.0				
142	245	10.03	1.35			44	1490	32.60	2.2				
163	215	8.69	1.55			54	1240	26.39	2.1				
188	188	7.56	1.55			61	1110	23.59	2.3				
5.5KW						67	1000	21.23	2.6	S87 SF87 SA87 SAF87	4P		
8.8	4550	161.74	0.85	74	910	19.23	2.9						
9.8	4130	145.60	0.90	32	1970	44.03	0.80						
11	3760	131.85	0.95	37	1750	39.10	0.90						
12	3360	116.92	1.05	41	1570	34.96	1.00						
14	3050	105.71	1.15	45	1420	31.43	1.15						
16	2610	89.60	1.25	52	1230	27.28	1.30						
18	2290	78.26	1.35	56	1180	25.50	1.05						
20	2350	71.43	1.40	67	1000	21.43	1.25						
22	1930	65.45	1.50	73	920	19.70	1.35						
24	2000	60.59	1.65	82	82	17.49	1.50						
26	1850	55.79	1.80	91	730	15.64	1.70						
29	1660	49.87	2.0	102	660	14.06	1.90						
32	1500	44.89	2.2	117	676	12.21	2.2						
35	1360	40.65	2.4	131	616	10.93	2.4						
19	2200	77.14	0.85	158	430	9.07	2.7	S77 SF77 SA77 SAF77	4P				
22	1850	64.00	0.90	181	375	7.88	2.7						
25	1850	57.00	0.85	50	1260	28.41	0.85						
30	1560	47.91	1.00	57	1110	25.07	0.90						
32	1440	44.03	1.10	64	990	22.22	1.00						
37	1280	39.10	1.25	78	850	18.42	0.85						
41	1150	34.96	1.40	82	810	17.45	0.90						
45	1040	31.43	1.55	94	705	15.28	1.00						
52	910	27.28	1.75	104	640	13.76	1.10						
56	870	25.50	1.45	118	650	12.07	1.30						
67	730	21.43	1.70	134	495	10.65	1.45						
73	675	19.70	1.85	151	440	9.44	1.65						
82	600	17.49	2.1	177	380	8.06	1.80						
91	535	15.64	2.3										
102	485	14.06	2.6										
117	420	12.21	3.0										
131	375	10.93	3.3										




上海承禹机电设备有限公司

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole
11.0KW						22KW					
26	3670	55.79	0.90			53	3630	27.63	0.85		
29	3290	49.87	1.00			61	3180	24.13	0.90		
32	2970	44.89	1.10			69	2870	21.23	0.90		
35	2700	40.65	1.20			76	2600	19.23	1.00	S97	
40	2400	36.05	1.40			86	2310	17.05	1.10	SF97	
44	2170	32.60	1.45	S97		95	2090	15.42	1.20	SA97	4P
55	1810	26.39	1.45	SF97		112	1780	13.07	1.30	SAF97	
61	1620	23.59	1.60	SA97	4P	128	1560	11.41	1.40		
68	1460	21.23	1.80	SAF97		153	1300	9.55	1.55		
75	1320	19.23	1.95			177	1130	8.26	1.55		
84	1180	17.05	2.2								
93	1070	15.42	2.3								
110	900	13.07	2.6								
126	790	11.41	2.8								
53	1800	27.28	0.90								
59	1610	24.43	1.00								
71	1340	20.27	1.20								
73	1340	19.70	0.95	S87							
82	1190	17.49	1.05	SF87							
92	1070	15.64	1.15	SA87	4P						
102	960	14.06	1.30	SAF87							
118	840	12.21	1.50								
132	750	10.93	1.65								
159	625	9.07	1.85								
183	545	7.88	1.85								
15.0KW											
33	4000	44.89	0.85								
36	3630	40.65	0.90								
41	3230	36.05	1.00								
45	2920	32.60	1.10								
55	2430	26.39	1.05								
62	2180	23.59	1.20	S97							
59	1970	21.23	1.30	SF97	4P						
76	1780	19.23	1.45	SA97							
86	1580	17.05	1.60	SAF97							
95	1430	15.42	1.70								
112	1220	1.307	1.90								
128	1060	11.41	2.1								
153	890	9.55	2.3								
177	775	8.26	2.3								
93	1430	15.64	0.85								
104	1290	14.06	0.95	S87							
120	1120	12.21	1.10	SF87							
134	1010	10.93	1.25	SA87	4P						
161	840	9.07	1.35	SAF87							
185	730	7.88	1.40								
18.5KW											
41	3970	36.05	0.85								
45	3590	32.60	0.90								
53	3060	27.63	1.00								
61	2680	24.13	1.05								
69	2420	21.23	1.10	S97							
76	2190	19.23	1.20	SF97							
86	1950	17.05	1.30	SA97	4P						
95	1760	15.42	1.40	SAF97							
112	1500	13.07	1.55								
128	1310	11.41	1.70								
153	1100	9.55	1.85								
177	950	8.26	1.85								




S37

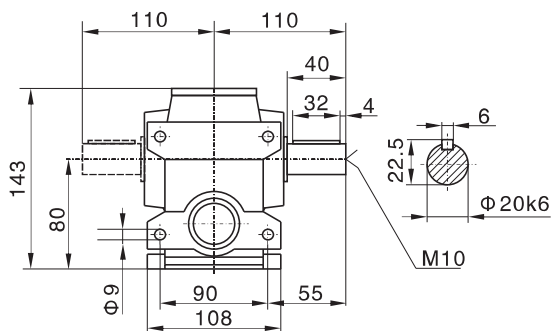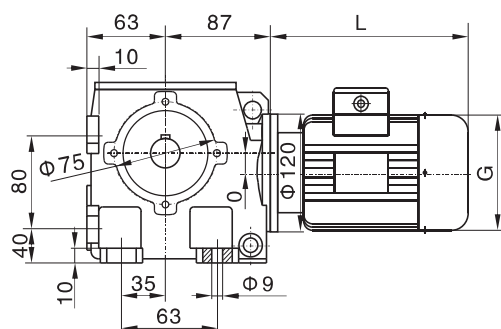




SA37

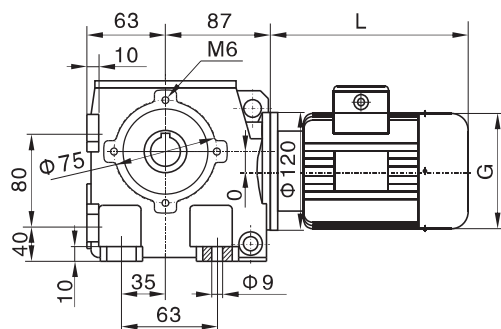

SF37(Φ120)

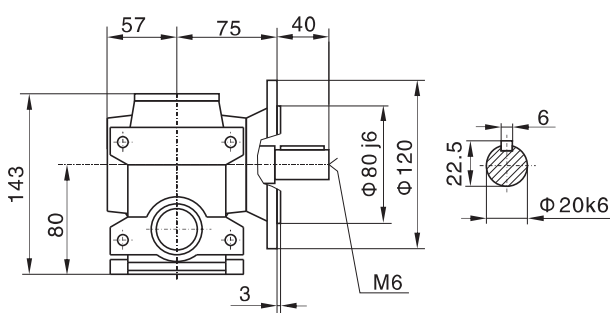
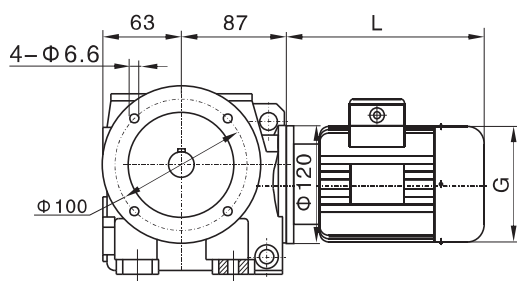


SAF37(Φ120)

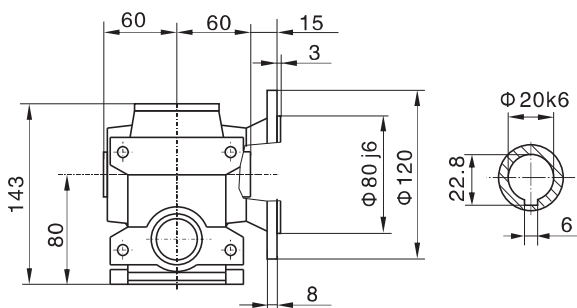
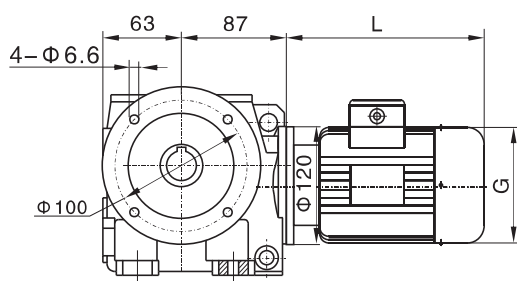


上海承禹机电设备有限公司



**SAF37(Φ160)
SF37(Φ160)**

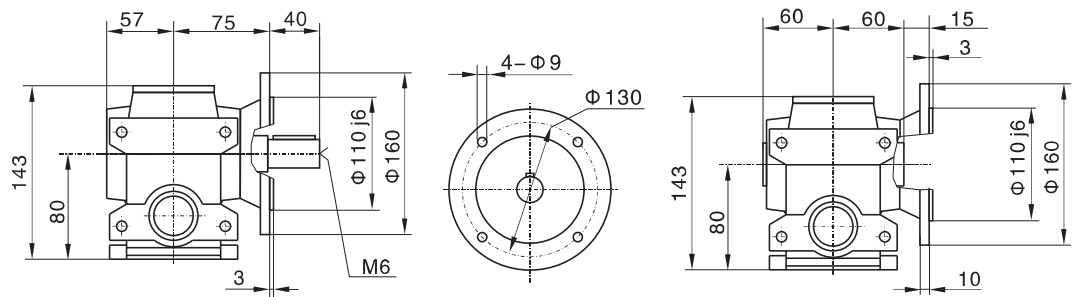



SAT37

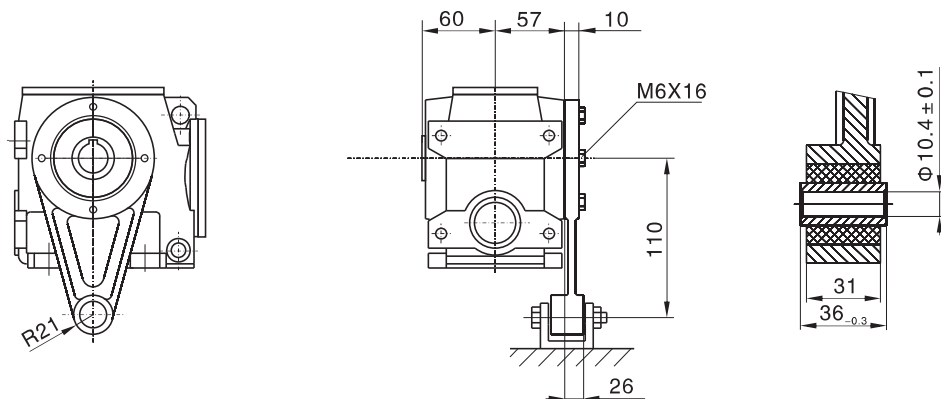


S..37 R17

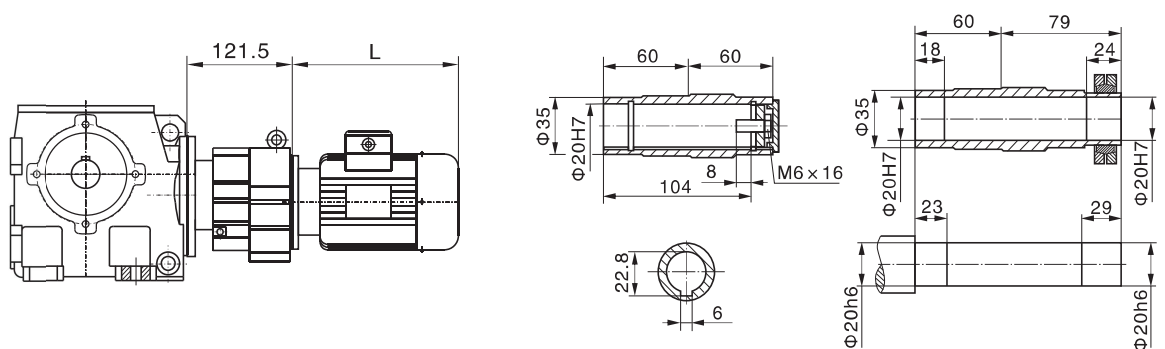




S..S37

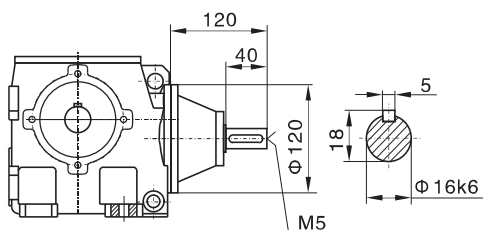




电机需方配或配特殊电机
时需加联接法兰






S47

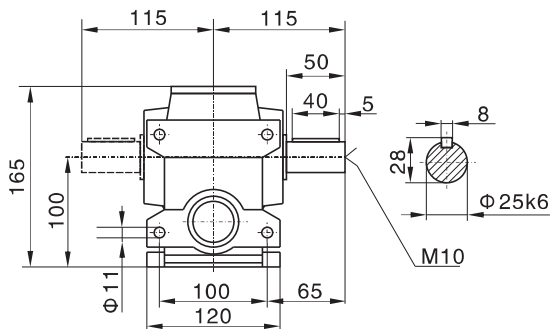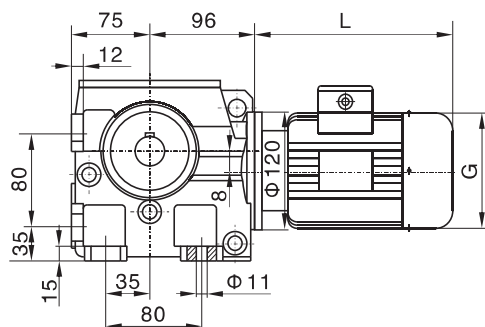




SA47

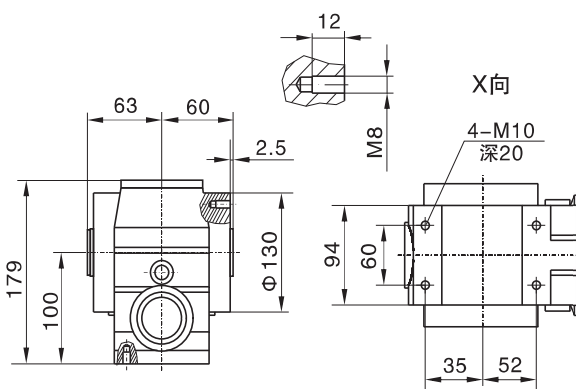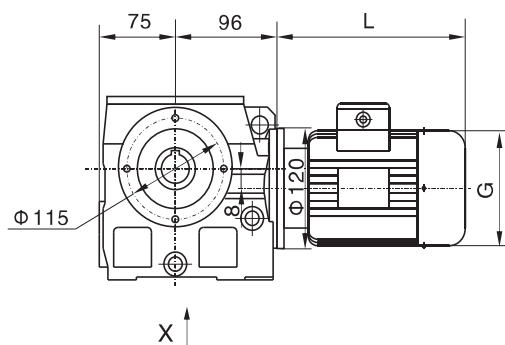

SF47

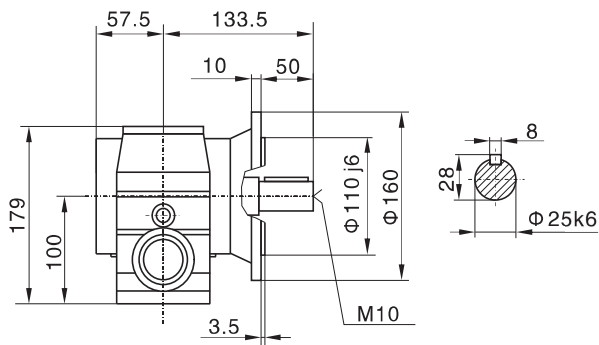
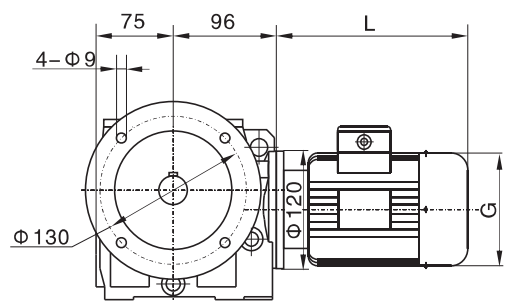


SAF47

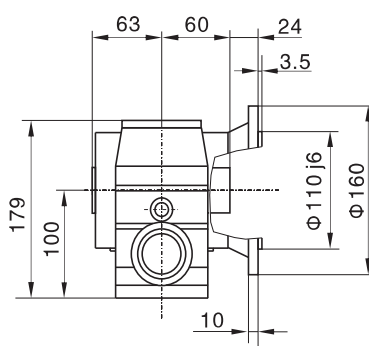
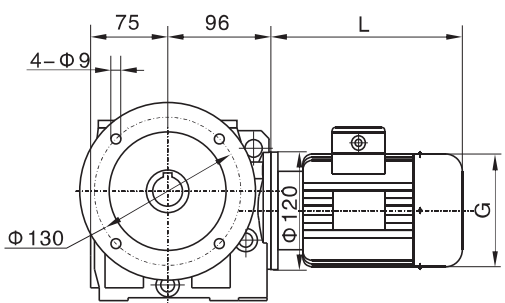


上海承禹机电设备有限公司



SAZ47

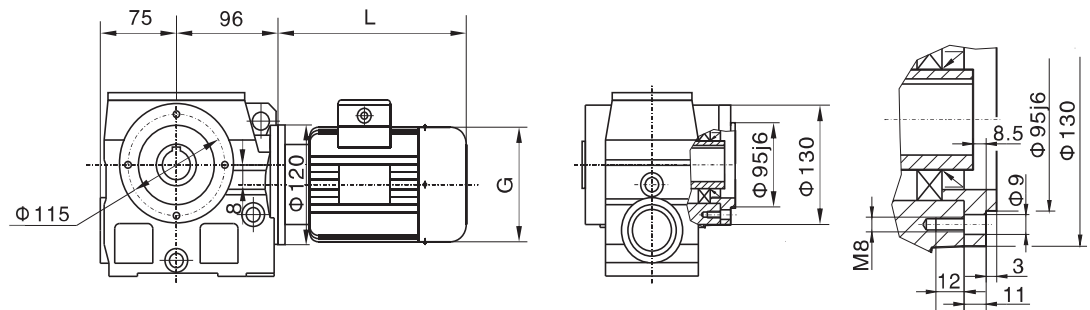



SAT47

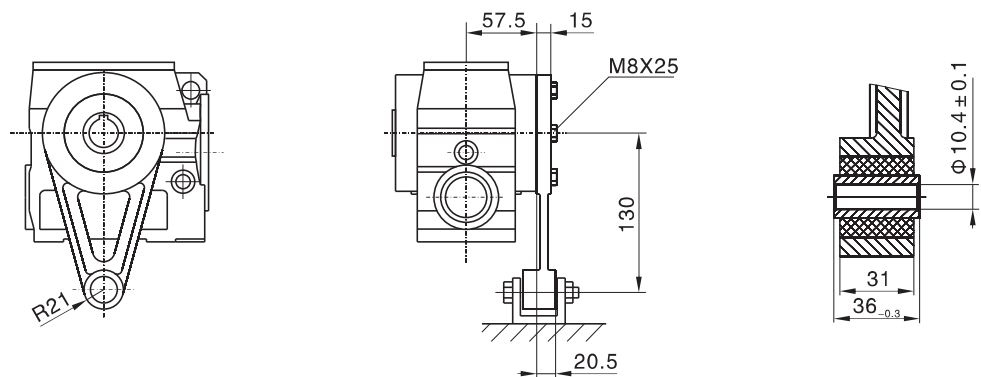


S..47 R17

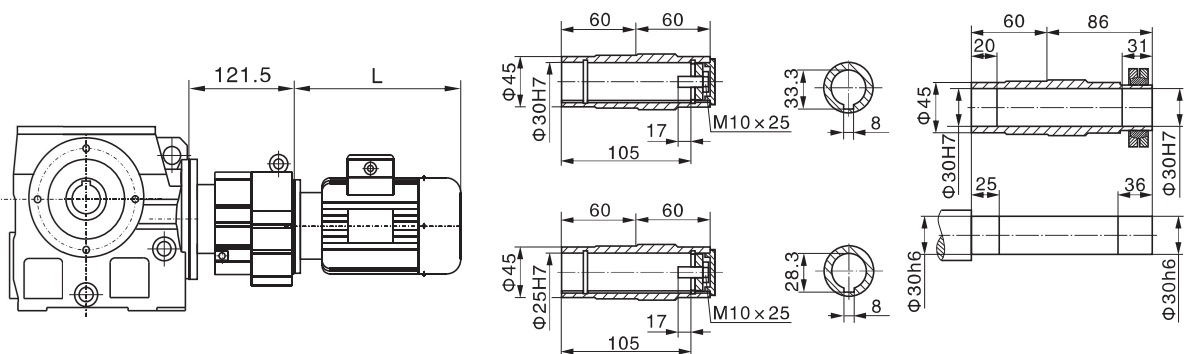



S..S47

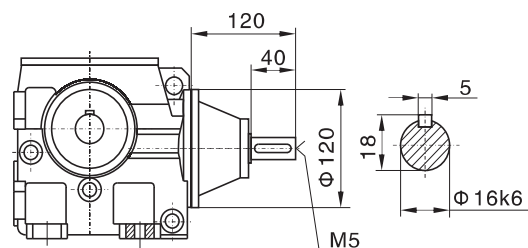



电机需方配或配特殊电机
时需加联接法兰





S57

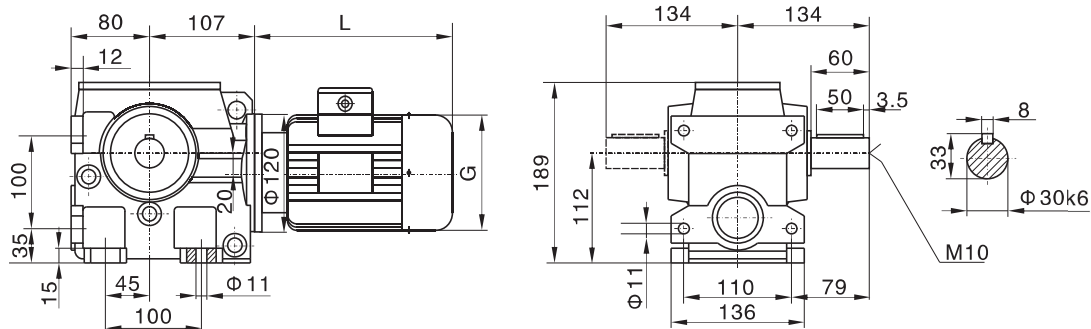



SA57

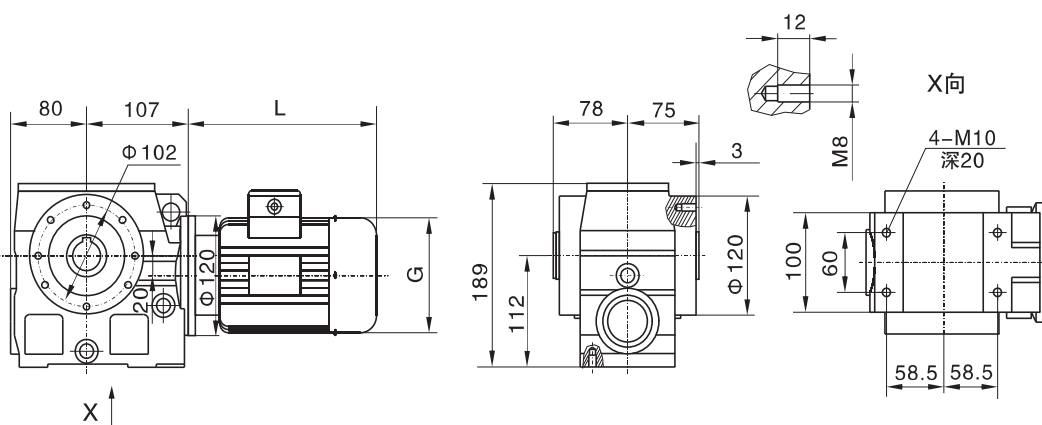

SF57

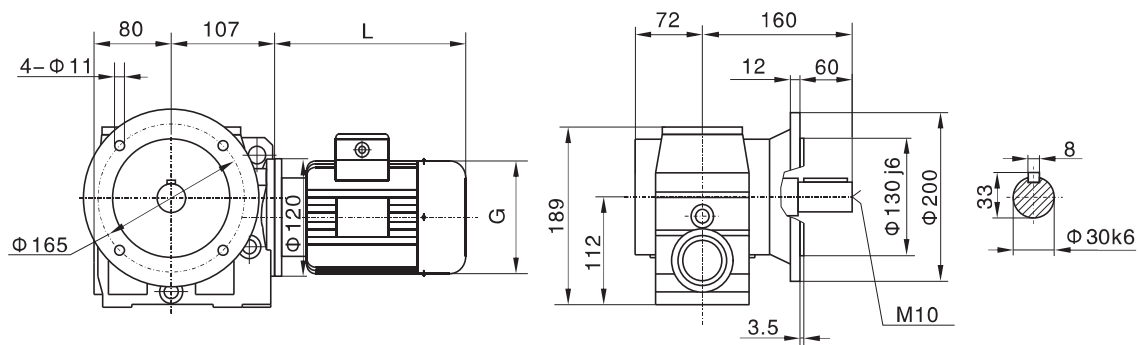


SAF57

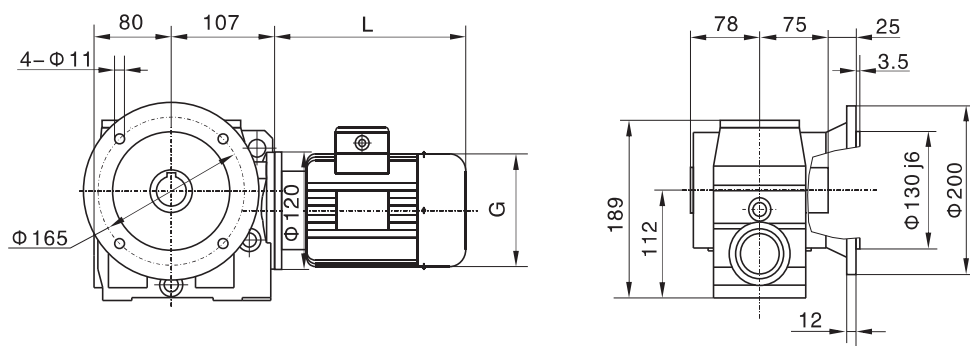


上海承禹机电设备有限公司


SAZ57

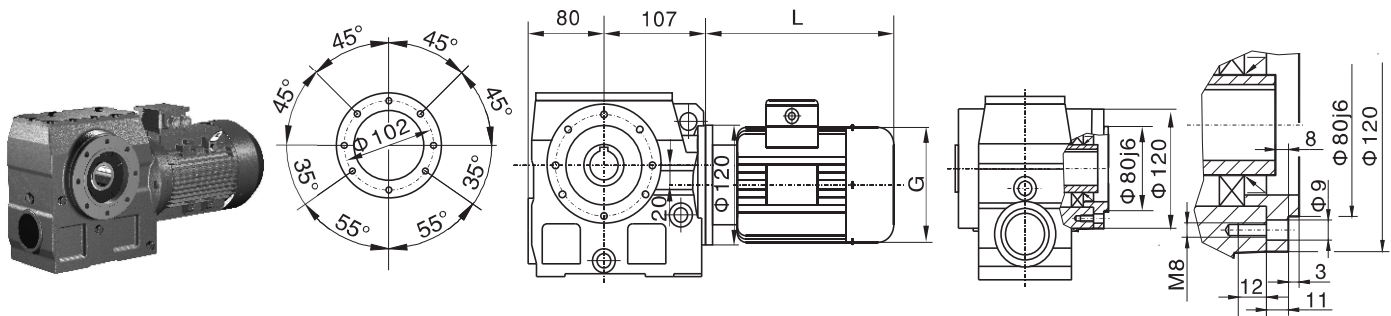


SAT57

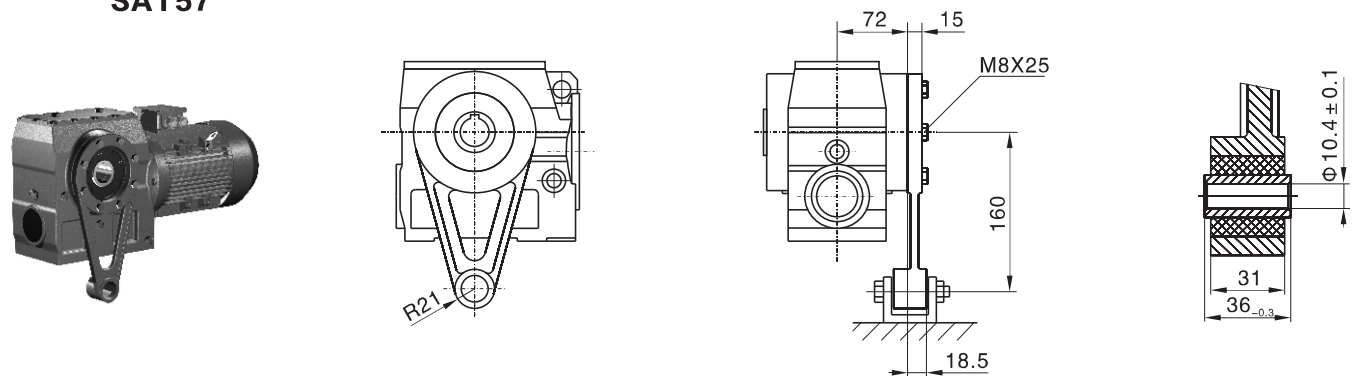



S..57 R17

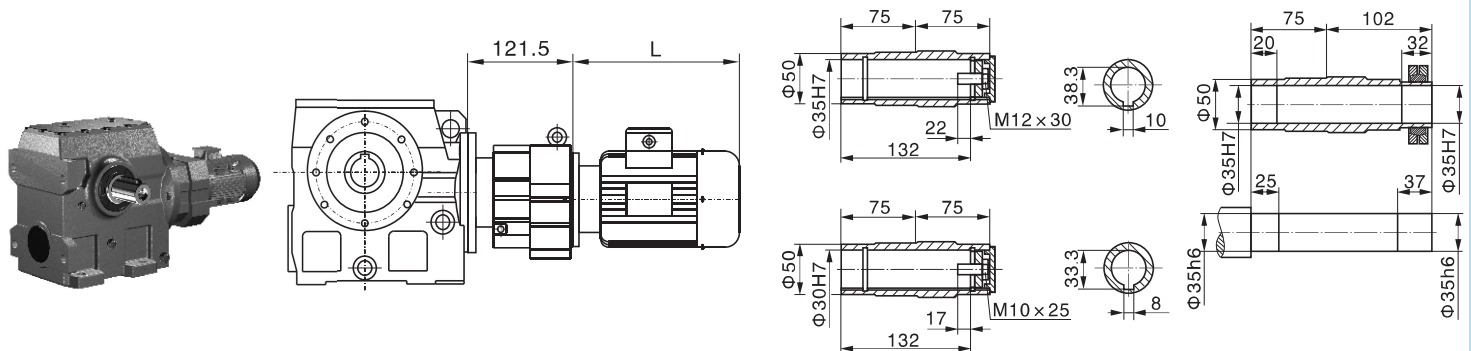



S..S57

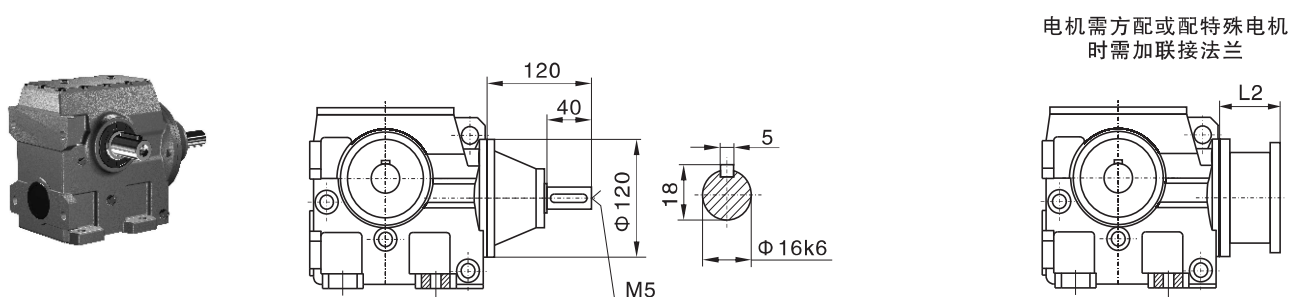



S67

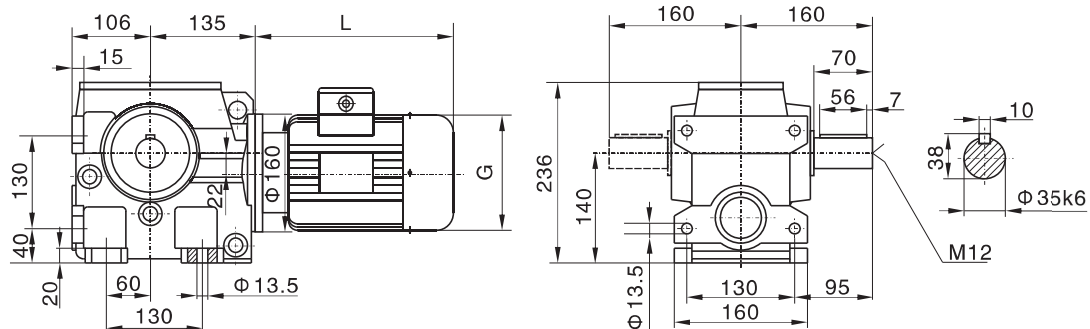



SA67

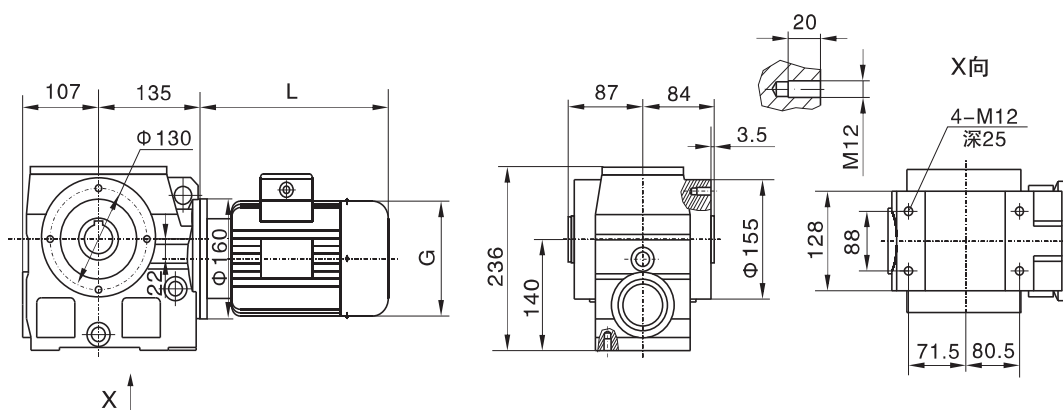

SF67


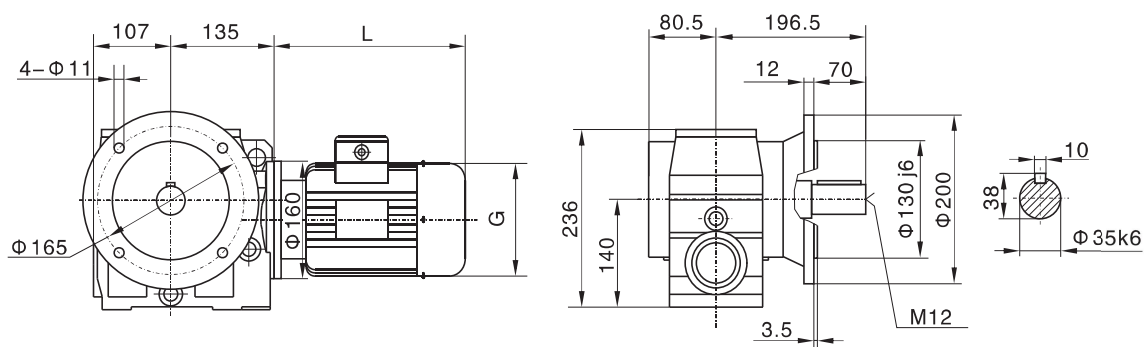


SAF67


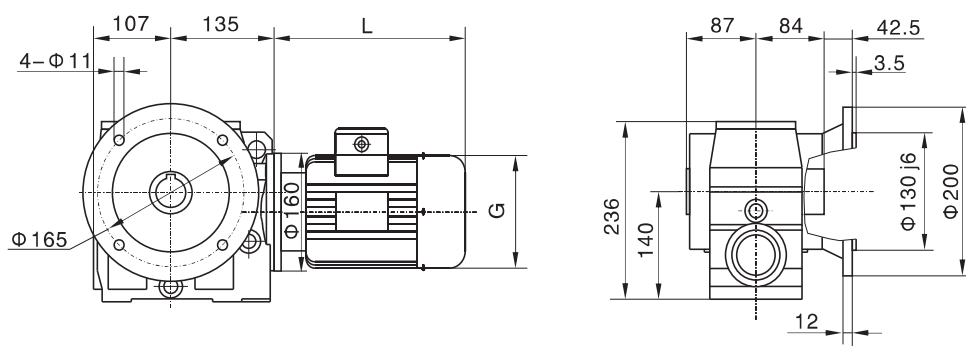


上海承禹机电设备有限公司



SAZ67

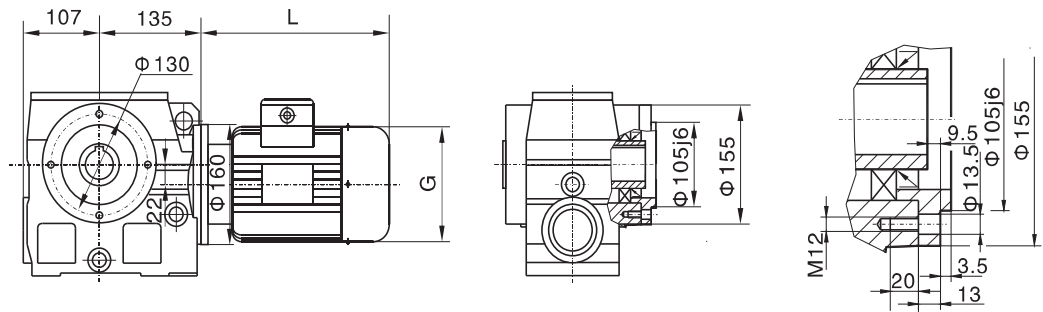



SAT67

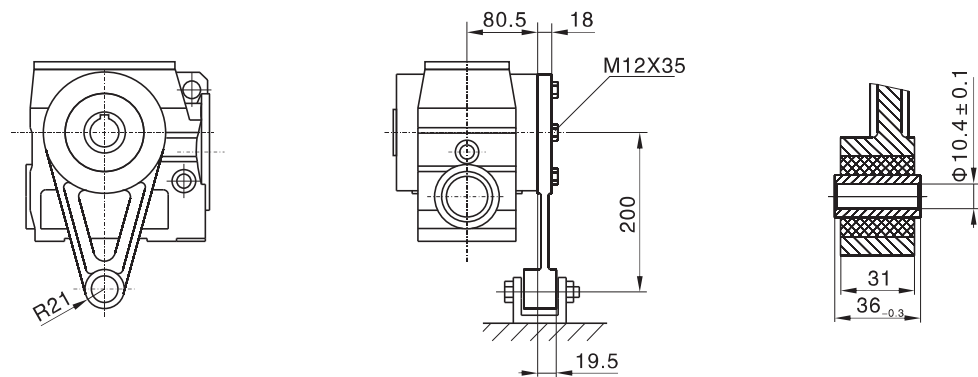


S..67 R37

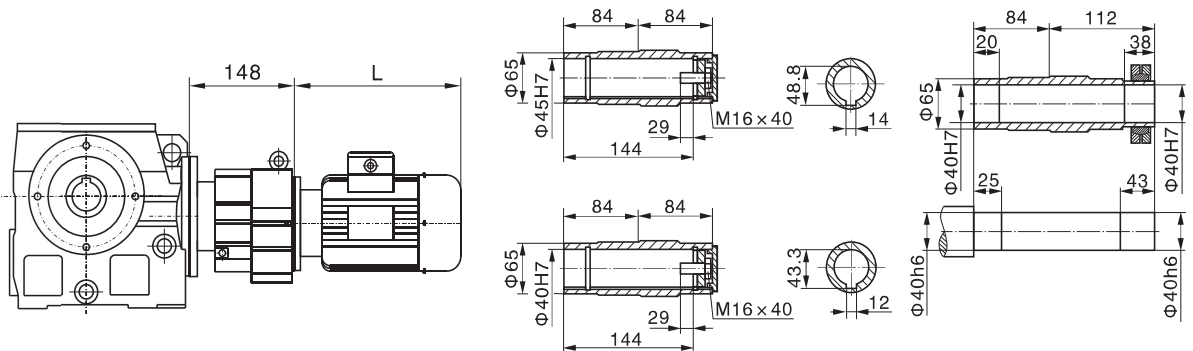



S..S67

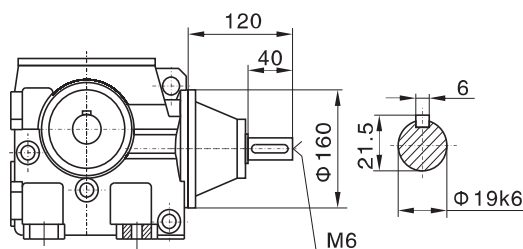



电机需方配或配特殊电机
时需加联接法兰





S77

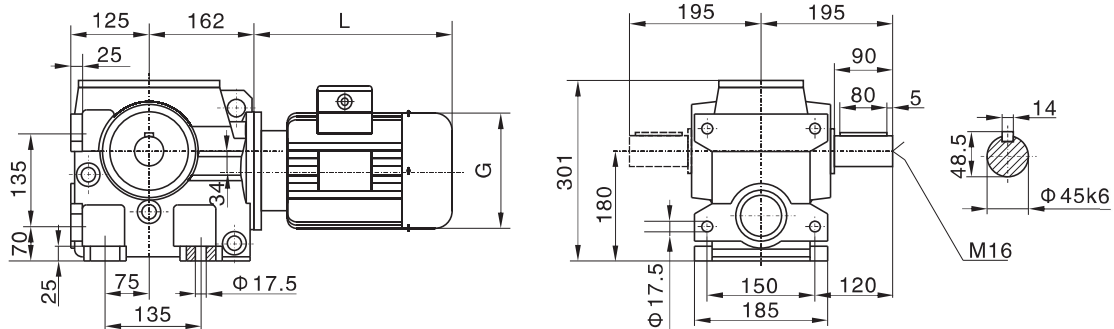



SA77

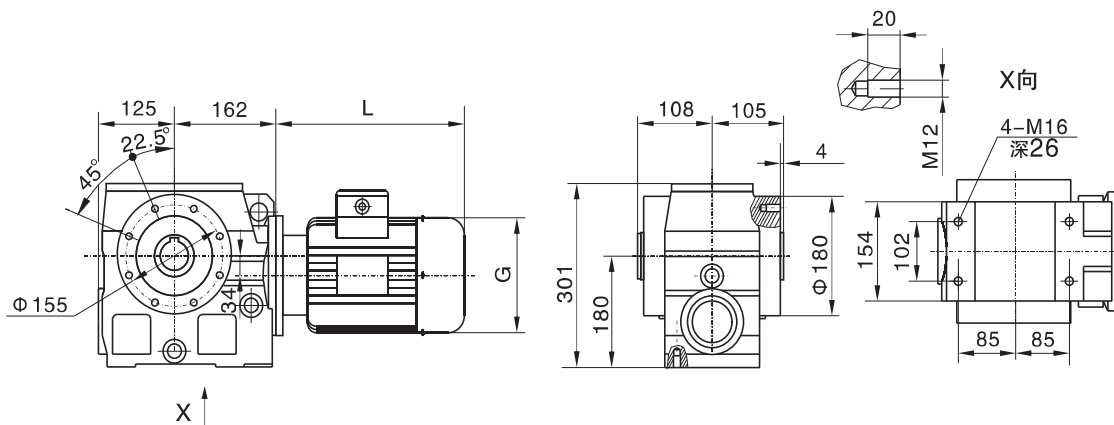

SF77


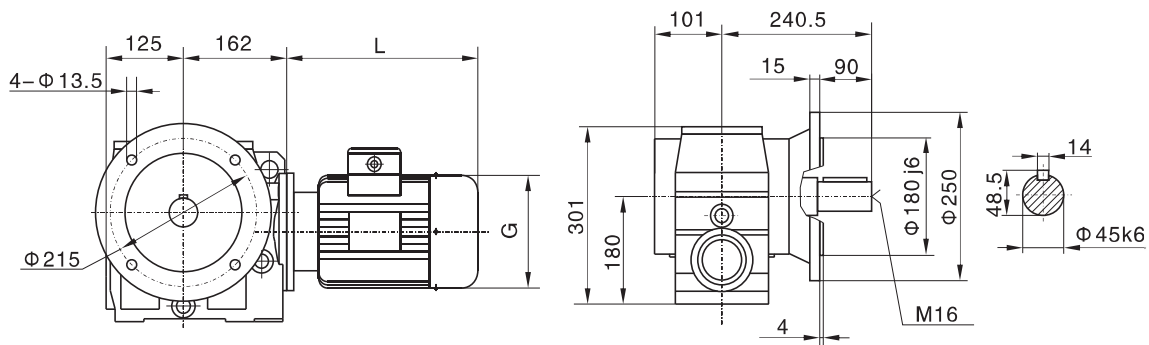


SAF77


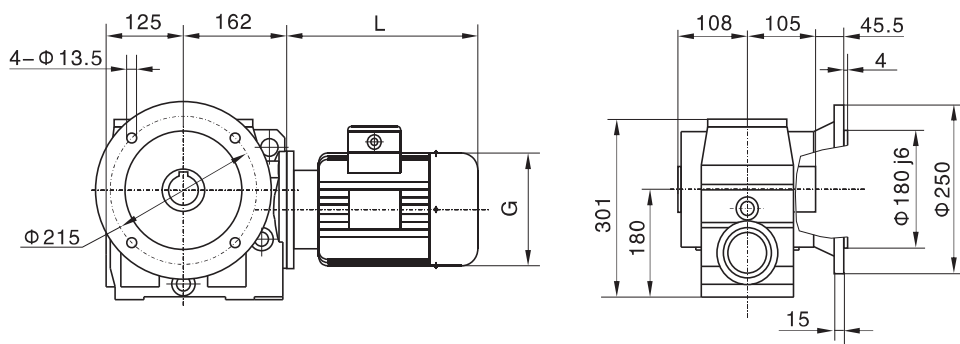


上海承禹机电设备有限公司



SAZ77

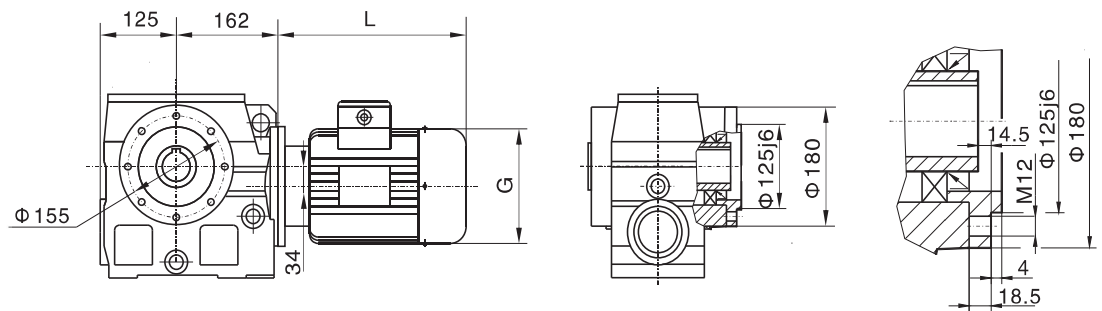



SAT77

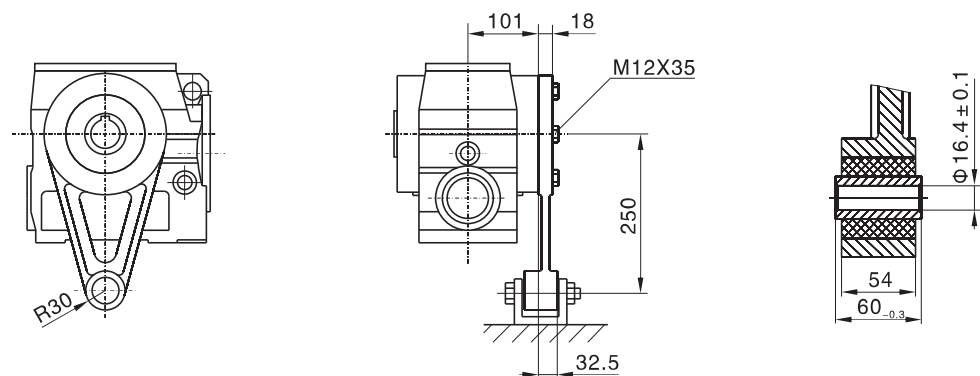


S..77 R37

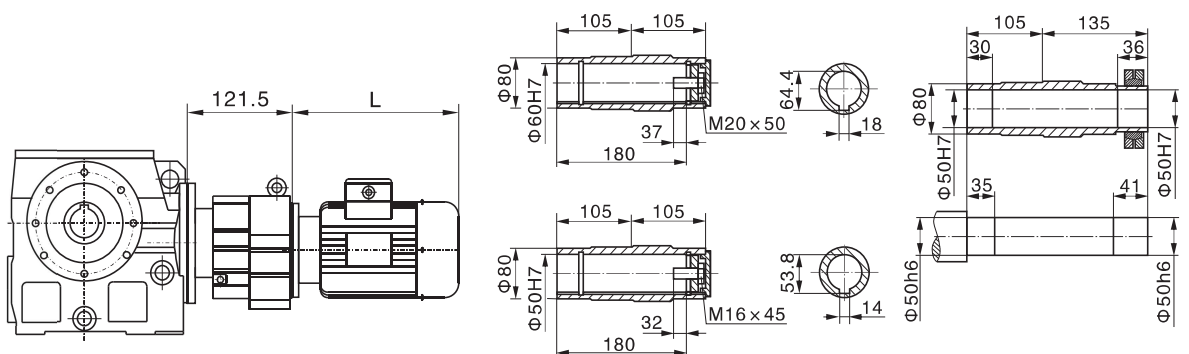



S..S77

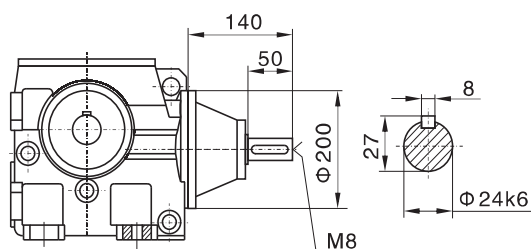



电机需方配或配特殊电机
时需加联接法兰





S87

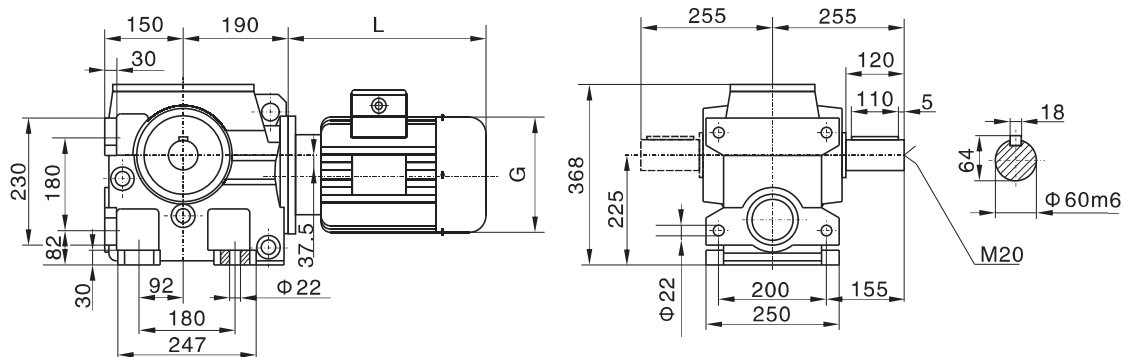



SA87

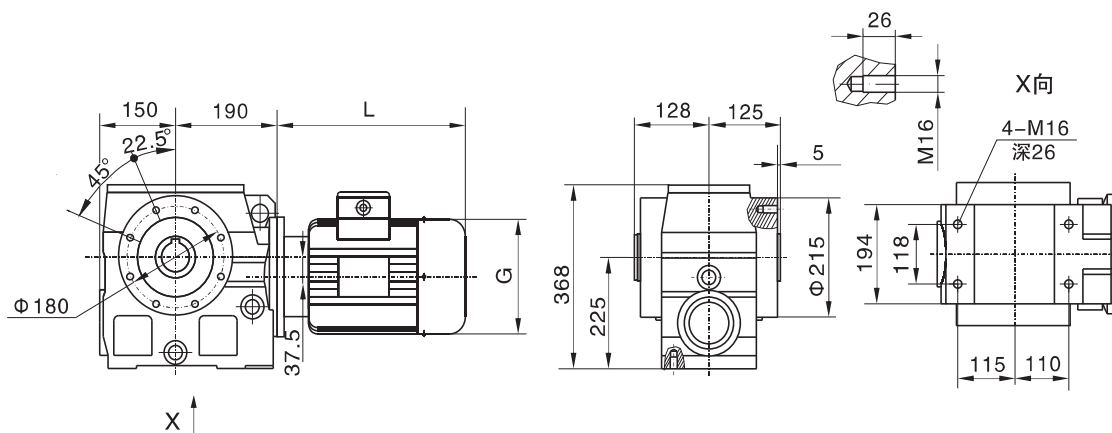

SF87


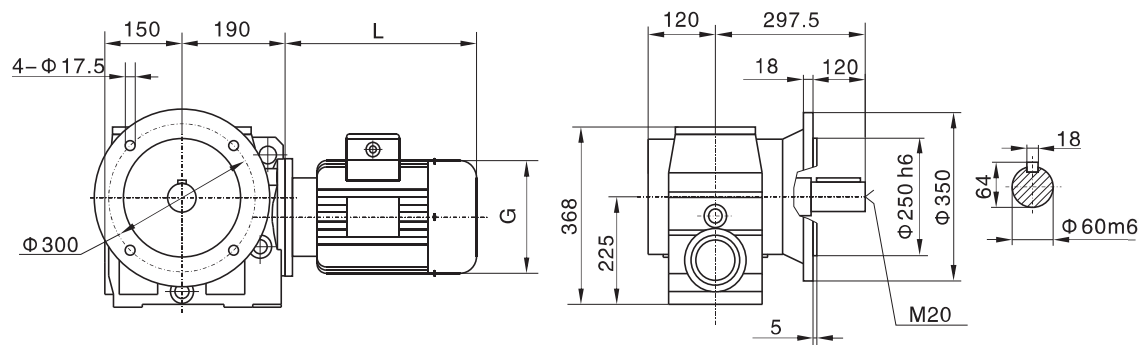


SAF87


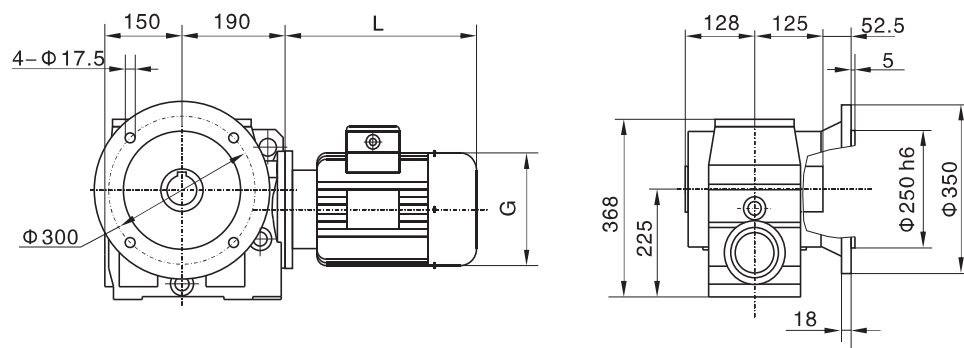


上海承禹机电设备有限公司



SAZ87

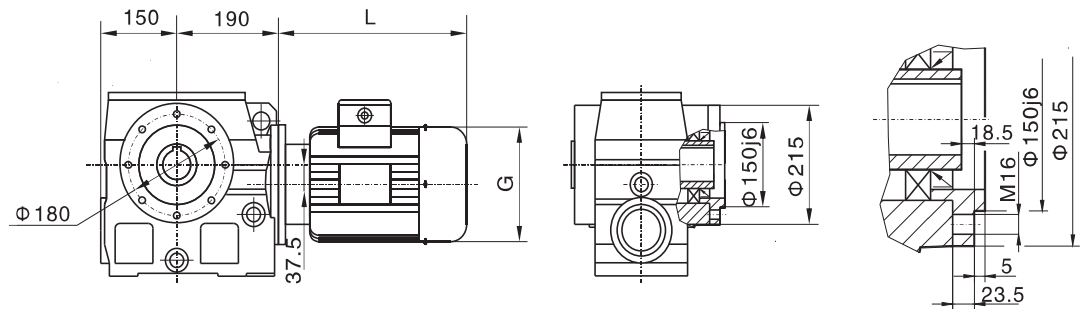



SAT87

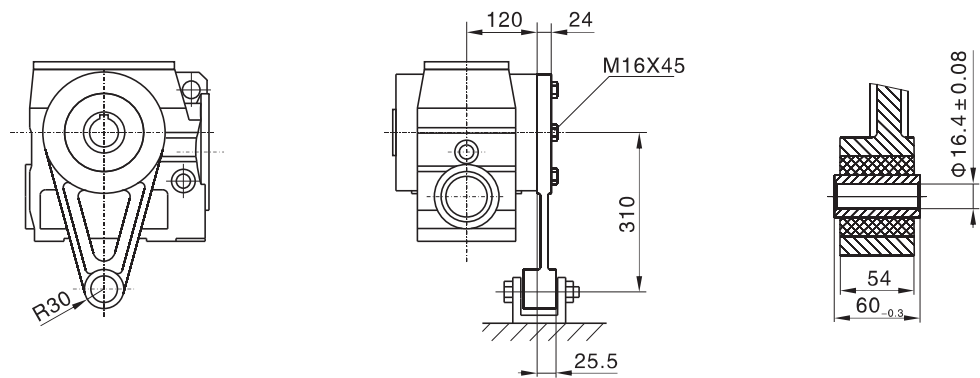


S..87 R57

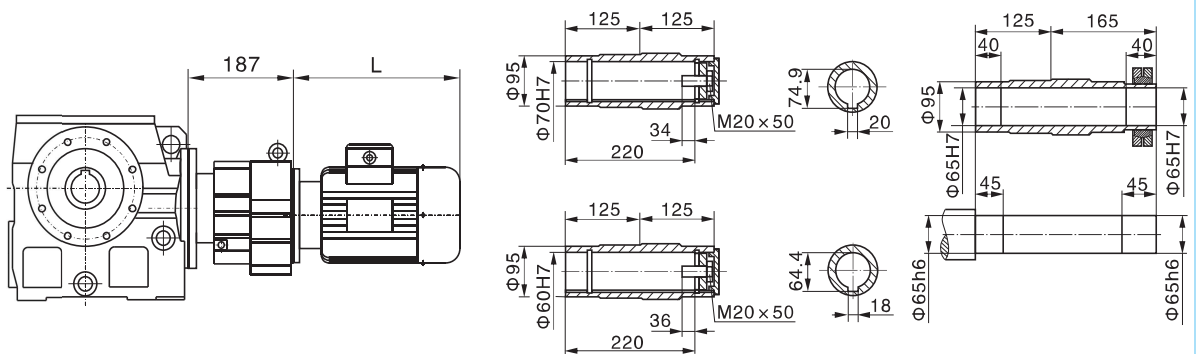




S..S87

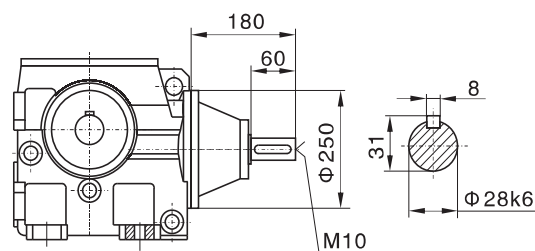




电机需方配或配特殊电机
时需加联接法兰






S97

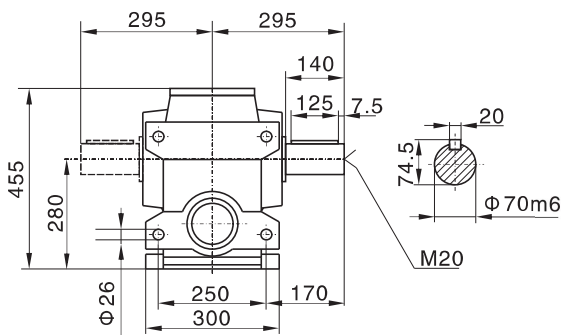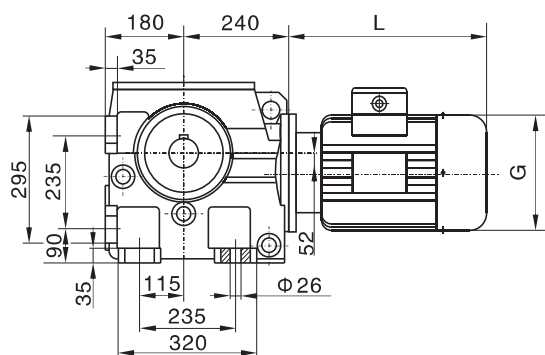




SA97

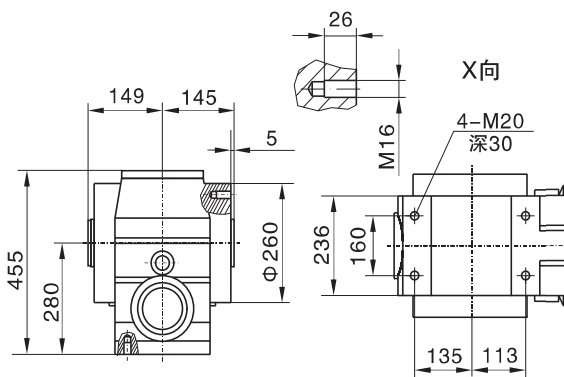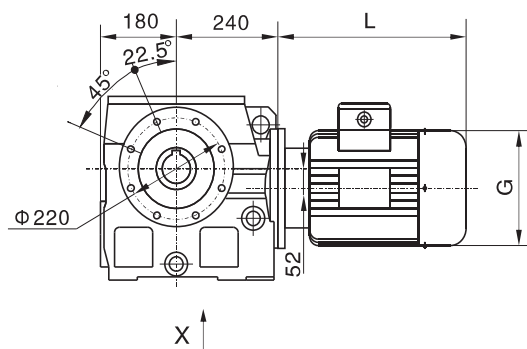

SF97

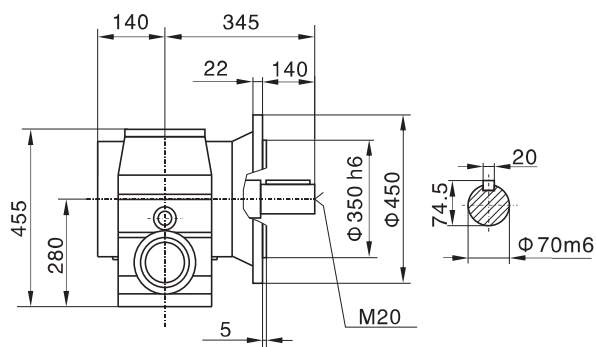
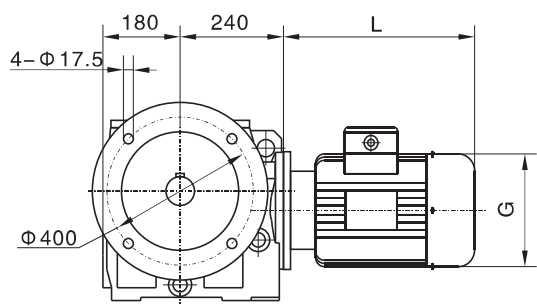


SAF97

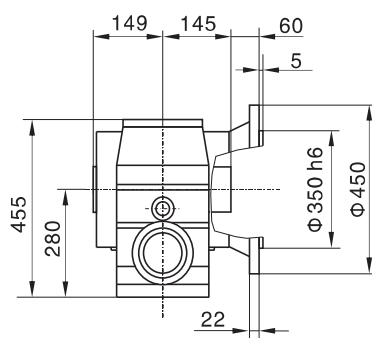
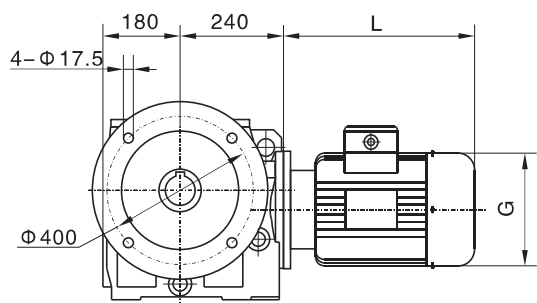


上海承禹机电设备有限公司



SAZ97

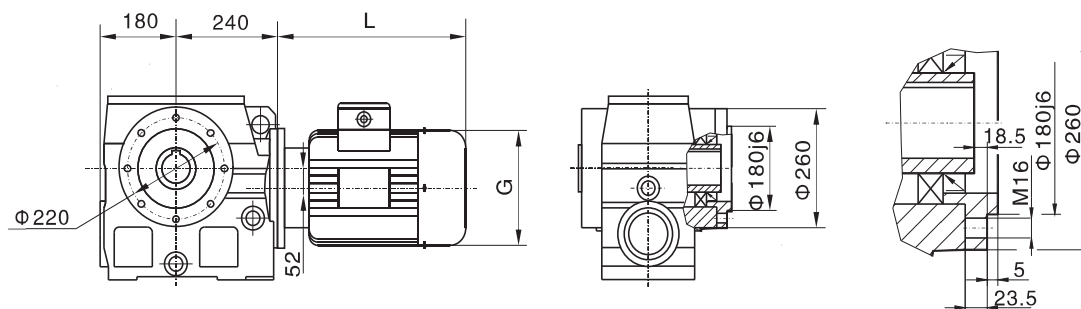



SAT97

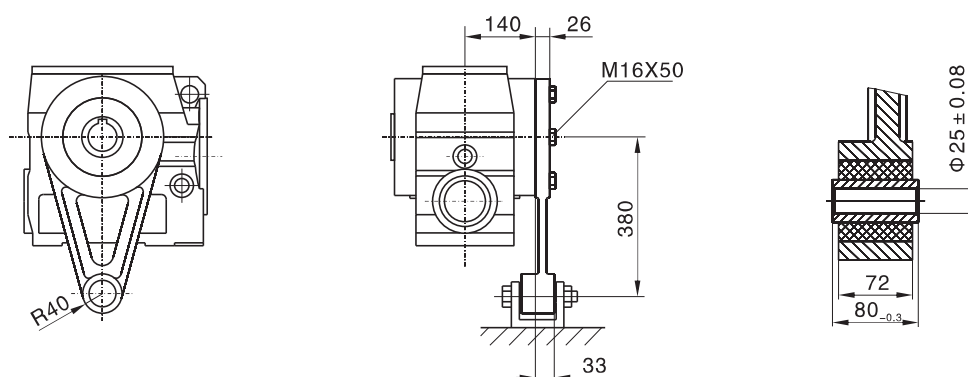

S..97 R57

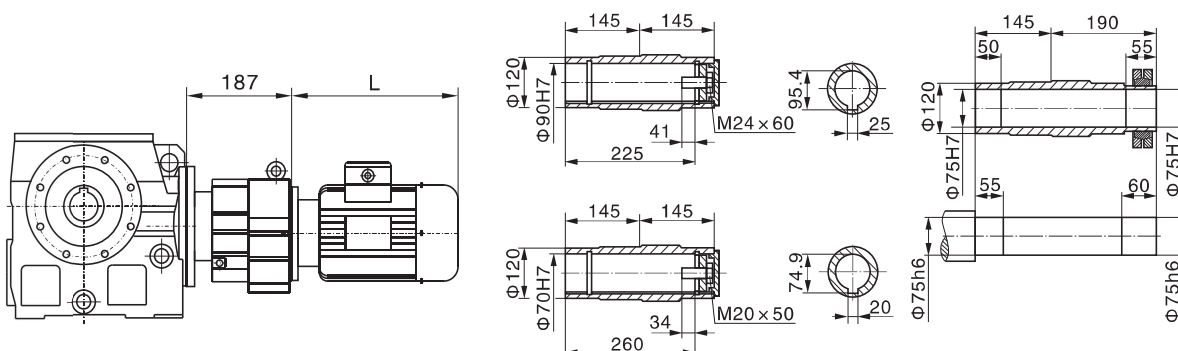

S..S97

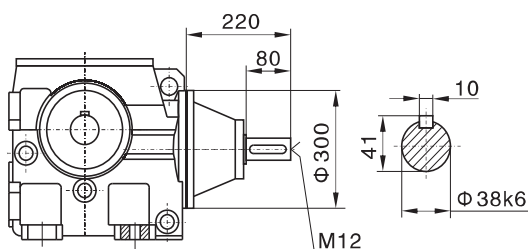

电机需方配或配特殊电机
时需加联接法兰

