



R系列斜齿减速器


R SERIES HELICAL GEAR MOTOR

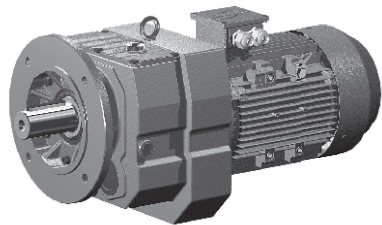

RF..7型 Model RF..7
法兰安装三级或二级斜齿轮减速机。
Three-stage or two-stage flange-mounted
helical gear reductor

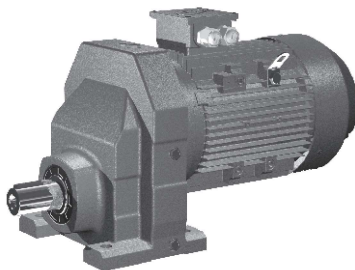

R..1型 Model R..1
底脚安装单级斜齿轮减速机。
Single-stage foot-mounted helical gear reductor

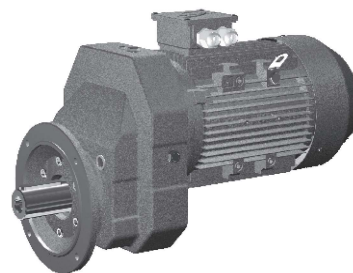


RF..1型 Model RF..1
法兰安装单级斜齿轮减速机。
Single-stage flange-mounted helical gear
reductor



R..7 R..7型 Model R..7 R..7
两 R..7机型组合减速机。
Combination of two Model R..7 reductors



R..S..7型 Model R..S..7
输入轴型，即配输入轴不配电动机的斜齿轮减速机。
Input-shaft style, in another word, helical gear reductor
equipped with input shaft but without the motor

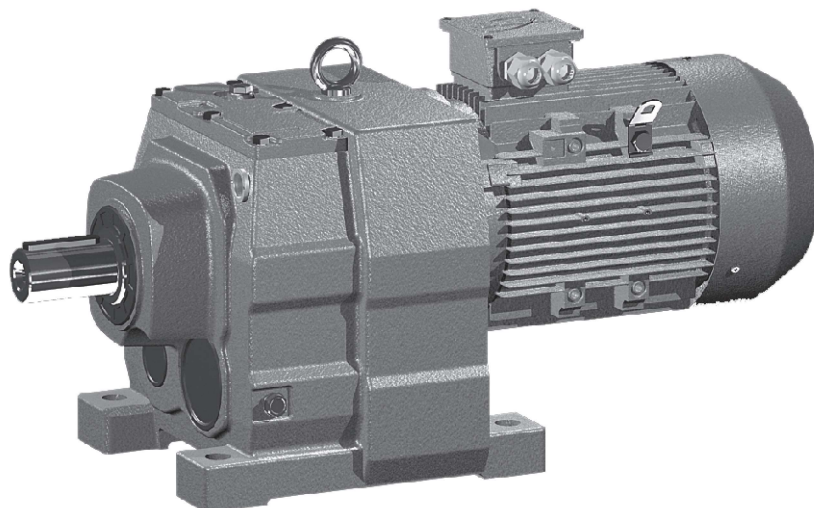

R..7型 Model R..7
底脚安装三级或二级斜齿轮减速机。
Three-stage or two-stage foot-mounted helical gear reductor

上海承禹机电设备有限公司

R

一、性能特点Characteristics:

1. 承禹减速机是在模块组合体系的基础上设计的，可以方便地配用各种型式的电动机或采用其它动力输入。同种机型可配用多种功率的电动机。容易实现各种机型之间的组合联接。
2. 传动效率高，单机型减速机效率高达96%。
3. 传动比划分细，范围广。组合机型可以形成较大的传动比，输出转速低。
4. 安装形式多样，可任意位置卧式或法兰安装。
1. chengyu reducers are based on the building block design, so it's convenient for them to fit all types of motors or to connect with other power input. The same type of reducers can fit motors with different power, so that it's possible for different types of machines to combine or connect.
2. High transmission efficiency. A single machine can reach a transmission efficiency as much as 96%.
3. Precise division of transmission ratio with a wide range. The combination of machines can produce a larger transmission ratio at a low output rotational speed.
4. Various ways of installation. Horizontal installation at any position or flanged installation.

二、场所条件 Working Environment:

1. 环境温度-40℃~50℃。(0℃以下启动时润滑油要加热到0℃以上。)
2. 海拔不超过1000米。
3. 输入转速不大于1800rpm，齿轮最高圆周速度不超过22m/s。
4. 可用于正反转。
5. 无行业限制。
6. 其他条件下使用请与我公司技术部联系。
1. Working temperature: -40℃~50℃ (The lubrication should be heated until above 0℃ if the machine works Below 0℃.)
2. The working place should be lower than 1,000 meters above sea level.
3. The input rotational speed should not exceed 1,800r/m. The circumferential speed of the gear should not exceed 20m/s.
4. Suitable for normal-reverse rotation.
5. Without industry limitation.
6. Please consult our technical supporting department for other circumstances.

三、选型指南 Instructions for Selection:

在确定使用系数之前必须先确定一天的运行小时数，每小时的起停次数和负载类型。其中负载类型按下列公式计算：
The daily operating time, the starting frequency and the load classifications be determined before deciding the service factor. The load classifications is calculated with the following formula:

负载类型 Load classification

- I 均匀负载，惯性加速系数 ≤ 0.2
 - II 中等冲击负载，惯性加速系数 ≤ 3
 - III 强烈冲击负载，惯性加速系数 ≤ 10
 - Uniform load, mass acceleration factor ≤ 0.2
 - Medium Impact Load, mass acceleration factor ≤ 3
 - Heavy shock Load, mass acceleration factor ≤ 10
- 如果惯性加速系数 > 10 ，请与我公司技术部联系。

$$\text{惯性加速系数} = \frac{\text{所有外部转动惯量}}{\text{驱动电机的转动惯量}}$$

实际的工况系数 f_A 必须满足下式：使用系数 $f_B \geq$ 工况系数 f_A

使用系数 f_B 已在后面的选型参数表中列出。

允许的轴伸径向载荷及轴向载荷

输出轴端允许的径向载荷及轴向载荷资料，请与我公司技术部联系。

减速机的使用与维护请参阅随机附带的《减·变速机使用说明书》。

Please contact our technical supporting department in case the mass acceleration factor > 10 .

$$\text{Mass acceleration factor} = \frac{\text{All external mass moments of Inertia}}{\text{Mass moment of inertia on the motor end}}$$


The actual operating mode factor (f_A) should meet the following formula: service factor $f_B \geq$ operating mode factor f_A

The service factor f_B is listed in the parameter selection list.

The permitted overhung loads and the axial forces.


Please contact our technical supporting department for the information on the permitted overhung loads and the axial forces at the output end of the shaft.

Regarding the use and maintenance of the reducer, please refer to the attached Instruction Manual of the Reductor and the Variable Speed Motor.

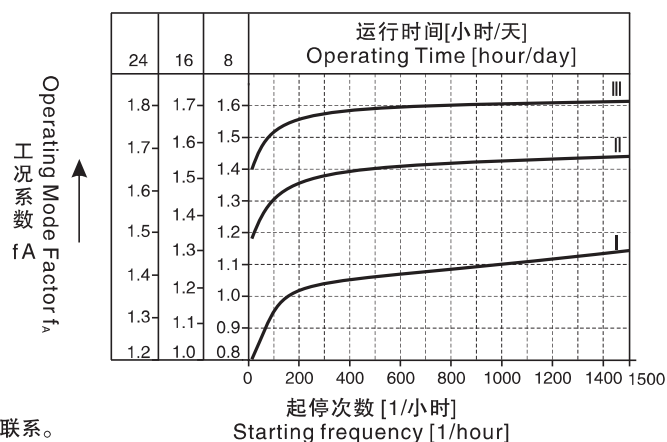

四、结构形式 Mounting type:

R系列结构图:/ R SERIES STRUCTURE DRAWING:

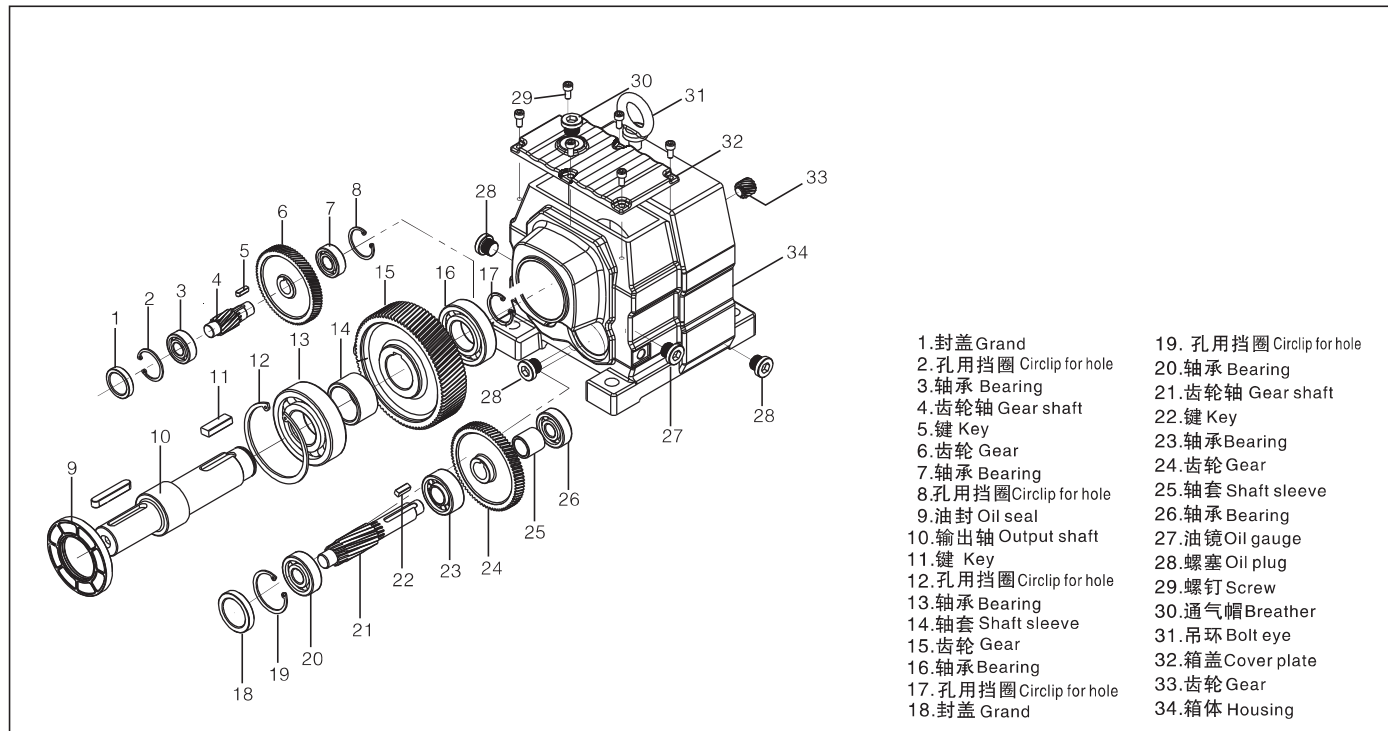


R系列斜齿轮减速器型号规格及机型表示方法/

本系列减速器的型号规格有:WR17、27、37、47、57、67、77、87、97、107、137、147、167等13种, 减速比有3.83~289.74等多种速比, 可分别配置0.18~160KW。

Type, specification and model notation for R series bevel gear speed reducers.:

Types, specifications of this series speed reducer have 13 kinds including r17、27、37、47、57、67、77、87、97、107、137、147、167 etc, speed reducing ratio:3.83~289.74, which can be allocated to 0.18~160kW.

R..1系列结构图:/ R..1 SERIES STRUCTURE DRAWING:

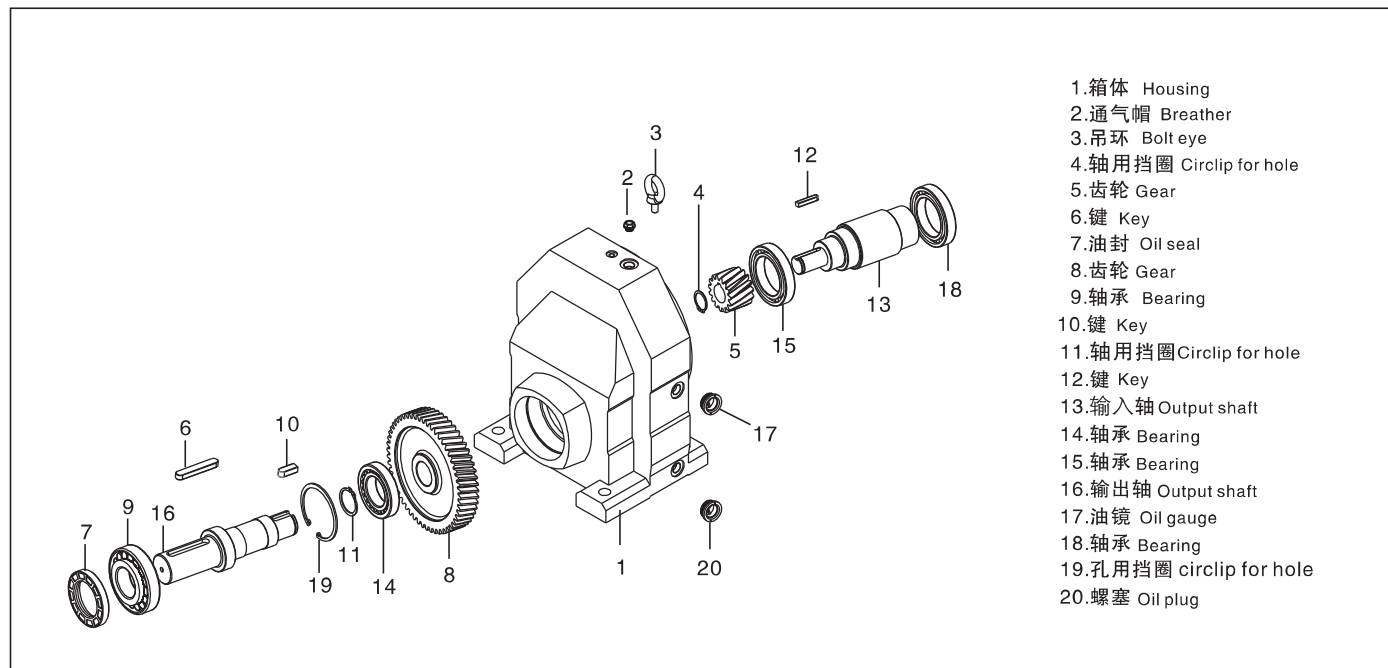



R..1系列一级减速斜齿轮减速器型号规格及机型表示方法/

本系列减速器的型号规格有: R51、61、71、81、91、101等6种, 减速比有1.42~8.23等多种速比, 可分别配置0.18~45kW。

Type, specification and model notation for R..1 series primary deceleration bevel gear speed reducers

The series speed reducers have seven kinds of types and specific-ations including R51、61、71、81、91、101 etc, speed reducing ratio range: 1.42~8.23, which can be allocated to 0.18~45kW.

五、型号说明 Instructions for Models:

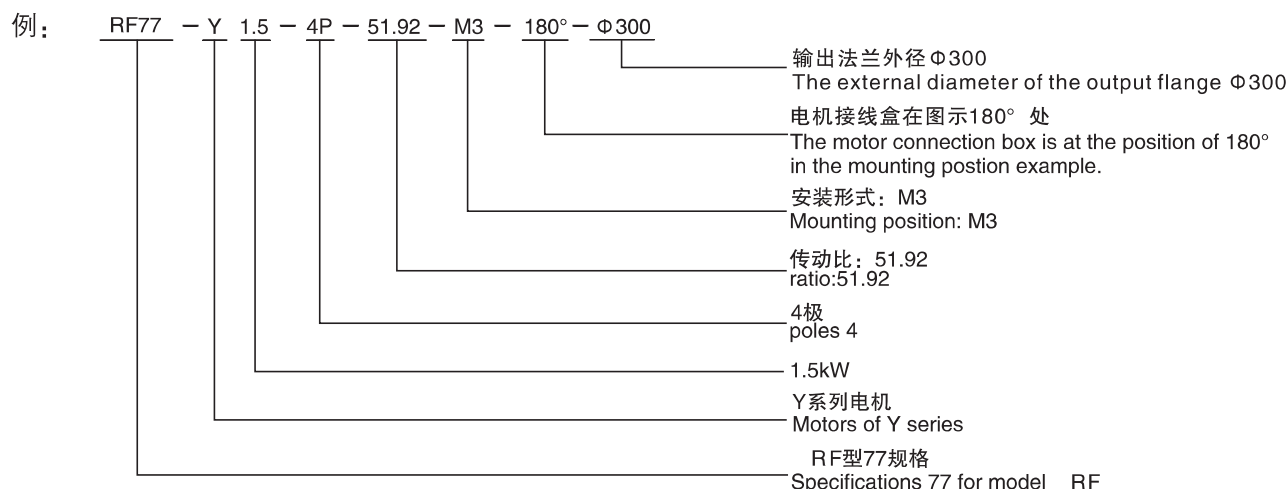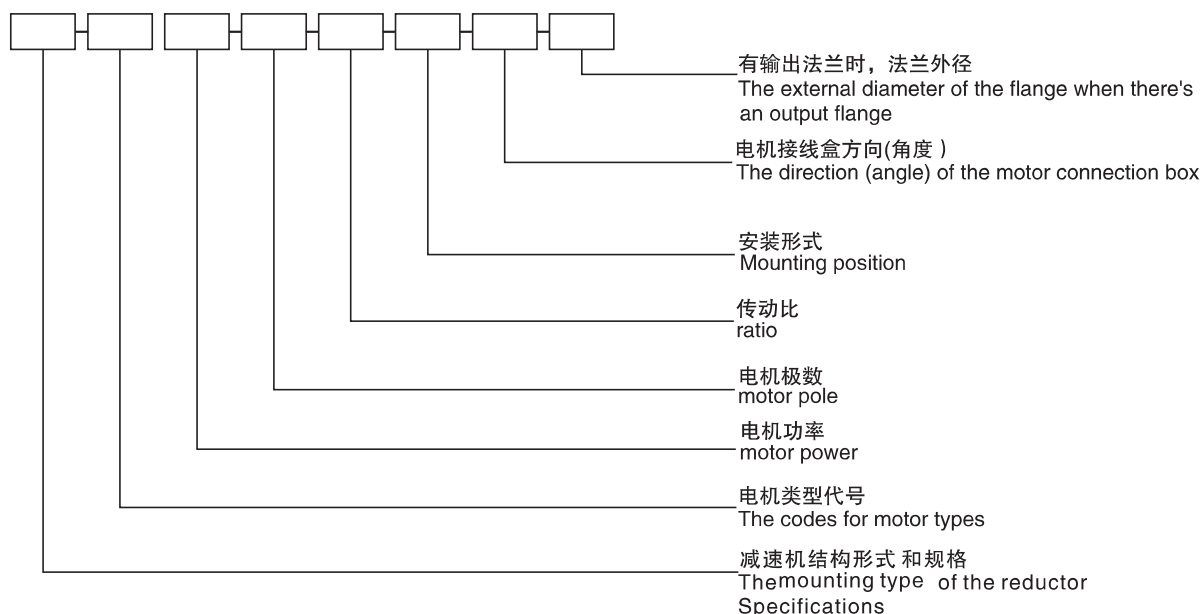

- 注: 1.输入轴型没有电动机的各项内容。
2.无特别说明时Y系列电动机供货按IP54防护等级。
3.不注明安装形式时，按安装形式图 中M1安装形式供货。
4.不注明接线盒角度时，按安装形式图 中0度位置供货。
5.有输出法兰时，不注明法兰大小按安装结构尺寸图 中的小法兰供货。
6.对输出旋转方向与输入旋转方向有特殊要求的用户，请与我公司技术部联系。
7.电机尺寸请查看电机外型尺寸表。

- Note: 1. The input-shaft style is not equipped with any motor
2. Motors of Y series are supplied with protection grade of IP54 unless otherwise specified.
3. The mounting position of M1 as shown in the mounting position example is the default way when supplying unless otherwise specified.
4. 0° as shown in the mounting position example is the default connection box angle when supplying unless otherwise specified.
5. If there's an output flange, the small flange as shown in the Physical Dimension Illustration will be supplied unless otherwise specified.
6. Please contact our technical supporting department in case there's any special requirements on the
7. About Motor size, please check table of motor's dimensions.

六、电机类型代号 Codes for Motor Types:

Y系列 Y series	Y	防爆电机 Flameproof Motor	YB	直流电机 Direct Current Motor	Z
制动电机 Brake Motor	YEJ	辊道电机 Roll Motor	YG	变频电机 Variable Frequency Motor	YVP

七、联接法兰L2长度 Length of Contact Flange L2

1. R..7系列斜齿轮硬齿面减速机联接法兰L2长度表

1. The form on length of the contact flange L2 of the helical gear reductor of WR..7 series

电机机座号 Motor frame size	63	71	80	90	100	112	132	160	180	200	225	250	280	315
减速机型号 Reducer type														
R.17	61.5	61.5	80	—	—	—	—	—	—	—	—	—	—	—
R.27	61.5	61.5	80	80	98	—	—	—	—	—	—	—	—	—
R.37	61.5	61.5	80	80	98	—	—	—	—	—	—	—	—	—
R.47	56	56	74.5	74.5	90.5	90.5	123	—	—	—	—	—	—	—
R.57	56	56	74.5	74.5	90.5	90.5	123	—	—	—	—	—	—	—
R.67	56	56	74.5	74.5	90.5	90.5	123	—	—	—	—	—	—	—
R.77	50	50	68.5	68.5	82.5	82.5	111	152.5	—	—	—	—	—	—
R.87	—	—	63.5	63.5	78.5	78.5	106	147.5	147.5	—	—	—	—	—
R.97	—	—	57.5	57.5	72.5	72.5	101	142.5	142.5	144.5	—	—	—	—
R.107	—	—	—	—	66.5	66.5	95	136.5	136.5	138.5	168.5	—	—	—
R.137	—	—	—	—	—	—	88	129.5	129.5	131.5	161.5	161.5	—	—
R.147	—	—	—	—	—	—	80	121.5	121.5	123.5	153.5	153.5	153.5	—
R.167	—	—	—	—	—	—	—	113.5	113.5	115.5	145.5	145.5	145.5	175.5

2. R..1系列斜齿轮硬齿面减速机联接法兰L2长度表

2. The form on length of the contact flange L2 of the helical gear reductor of R..1 series

电机机座号 Motor frame size	63	71	80	90	100	112	132	160	180	200	225
减速机型号 Reducer type											
R.51	56	56	74.5	74.5	90.5	90.5	123	—	—	—	—
R.61	56	56	74.5	74.5	90.5	90.5	123	—	—	—	—
R.71	50	50	68.5	68.5	82.5	82.5	111	152.5	—	—	—
R.81	—	—	63.5	63.5	78.5	78.5	106	147.5	147.5	—	—
R.91	—	—	57.5	57.5	72.5	72.5	101	142.5	142.5	144.5	—
R.101	—	—	—	—	66.5	66.5	95	136.5	136.5	138.5	168.5

八、安装形式图释义 Explanation of mounting position example

 通气孔 Breather valve	 油位孔 Oil level plug	 放油孔 Oil drain plug
--	---	---

九、选型参数表释义 Explanation of Parameter Selection List


电动机功率 Power (kW)	输出转速 Output speed (r/min)	输出转矩 Output torque (N · m)	传动比 Ratio (i)	使用系数 Service factor (fB)	机型号 Type	电机极数 Motor pole	重量 Weight (kg)
0.75	20	350	67.93	0.81	R 47	4P	20
	22	329	63.77	0.87	RF47	4P	20
	23	309	59.99	0.92			
	25	291	56.54	0.98			

1. 选型参数表中的机型号可与 该栏中的任一传动比搭配。

1. The machine types in the parameter selection list can match any transmission ratio in the column.

上海承禹机电设备有限公司

R..1系列安装方位图/ R..1series installation direction diagram

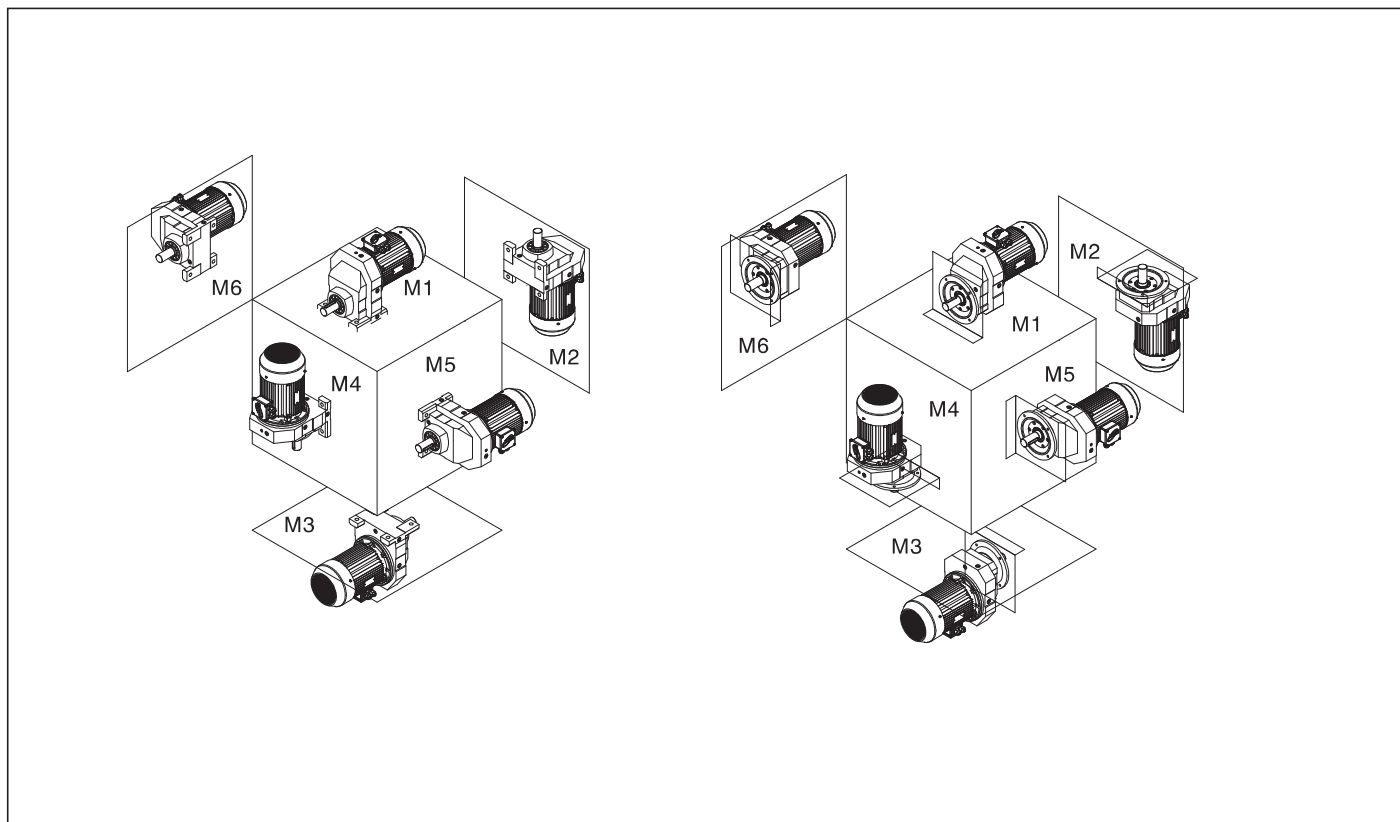

R..1系列油量表(单位kg)/ R..1 series oil capacity table (unit:kg)

机型号 安装方位	M1	M2	M3	M4	M5	M6
R51	0.6	0.4	0.6	0.72	0.32	0.4
R61	0.65	0.5	0.72	0.8	0.4	0.5
R71	1.2	0.9	1.2	1.6	0.8	0.8
R81	2	1.8	2	2.8	1.2	1.2
R91	3	2	2.8	3.6	1.8	2
R101	5.5	3.8	6	6.8	3.6	3.2


R..1系列重量表/ R..1 series weight table:

机型号/Type	R51	R61	R 71	R81	R91	R101
重量kg/Weight kg	7.5	13	22	33	61	80

注：表中重量为不加油时重量，带输入轴、输入法兰另加10%;带电机根据所配规格另加。

Note: Inside the table are the weights when oil is not added. Weight should be added with 10% when input shaft and connection flange are furnished; If there is a motor, please add weight according to motor type.

R系列安装方位图/ Rseries installation direction diagram

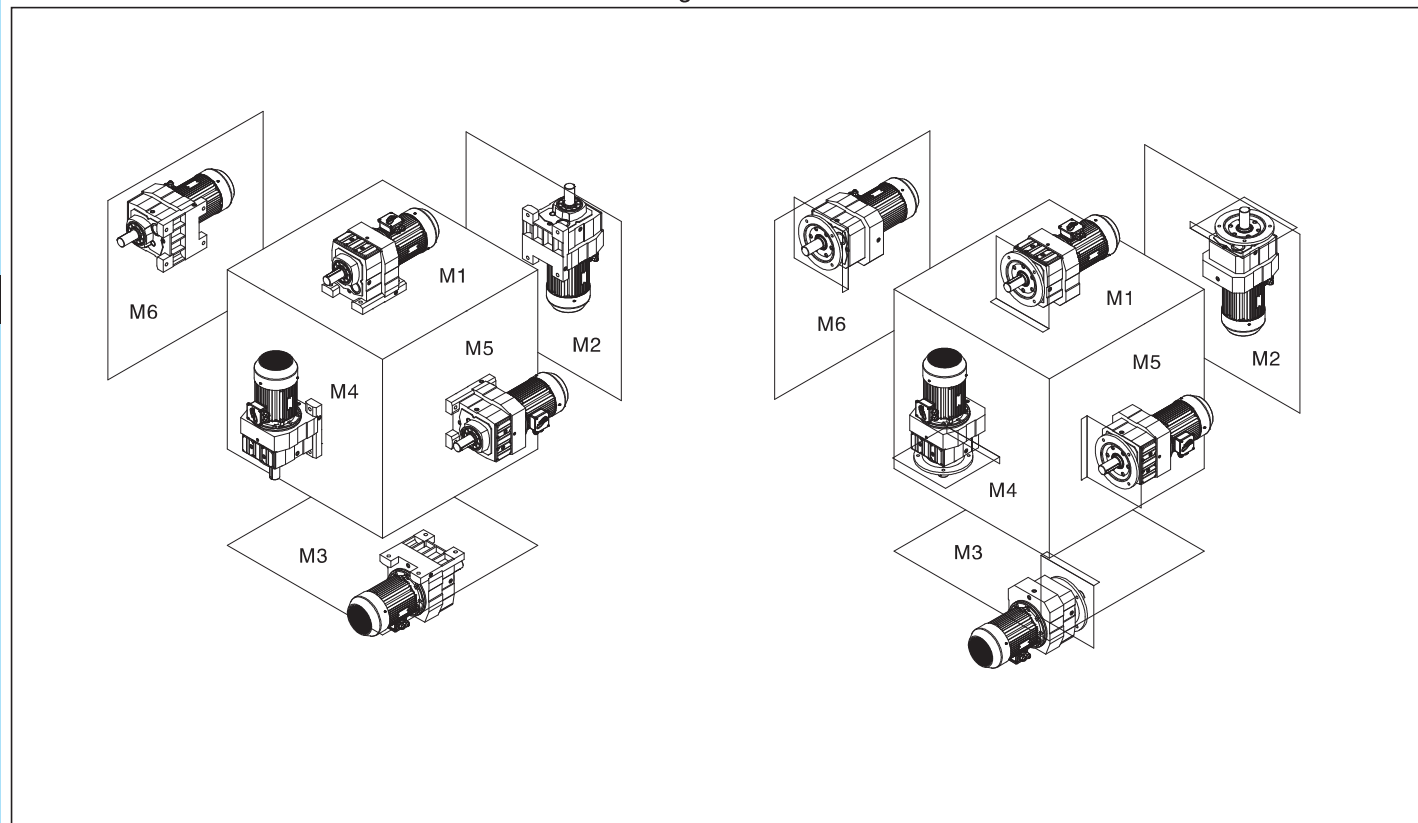

R系列油量表(单位kg) / R series oil capacity table (Unit:kg)

机型号 安装方位	M1	M2	M3	M4	M5	M6
R17	0.3	0.6	0.4	0.7	0.4	0.4
R27	0.8	0.8	1	1.1	0.8	1
R37	0.8	0.8	1	1.1	0.8	1
R47	1	1.6	1.5	1.7	1.5	1.5
R57	1.1	1.9	1.7	2.1	1.7	1.7
R67	1.3	2.6	2.8	3.2	1.8	2
R77	1.6	3	3	3.3	2.1	2.3
R87	3.6	6	6.5	7	5.7	5.9
R97	4.5	10.9	10.7	12.5	10.3	10.6
R107	6.4	17.4	18	20.5	14	17
R137	10	28	29	31	25	25
R147	16	45	48	52	40	41
R167	29	80	78	88	66	69

R系列重量表/WR series weight table


机型号/Type	R17	R27	R37	R47	R57	R67	R77	R87	R97	R107	R137	R147	R167
重量kg/Weight kg	5	9	10	15	21	27	35	65	120	165	255	370	700

注：表中重量为不加油时重量，带输入轴、输入法兰另加10%；带电机根据所配规格另加。



Note: Weight in the table means the weight when oil is not added. When input shaft is furnished, 10% weight should be added; If there is a motor, please add weight according to motor type.

上海承禹机电设备有限公司


R17- R167安装形式图 R17- R167 Mounting position example

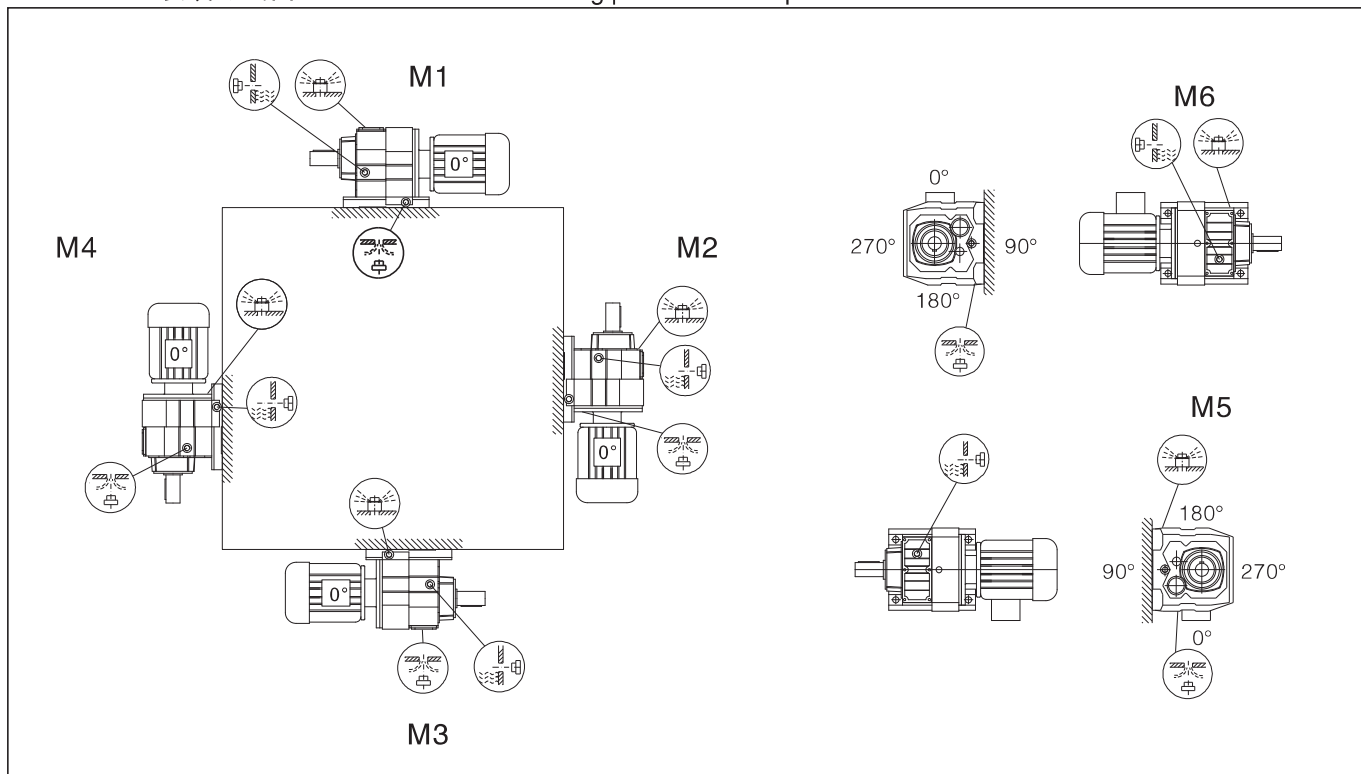



RF17- RF167安装形式图 RF17- RF167 Mounting position example

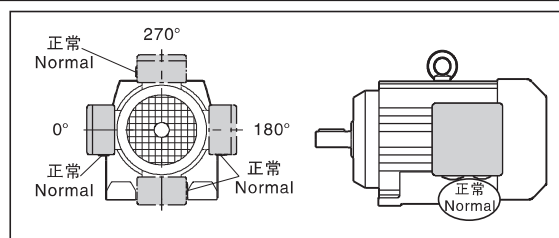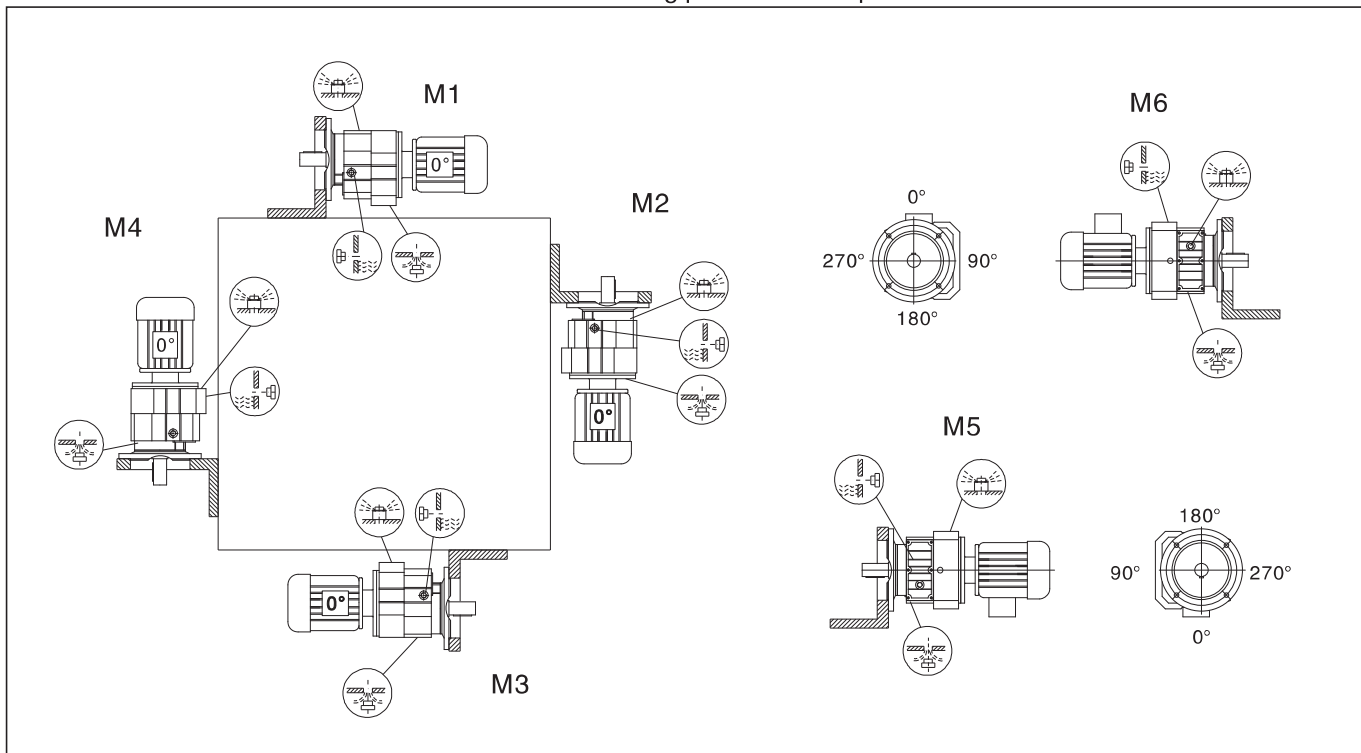

R51- R101安装形式图 R51- R101 Mounting position example

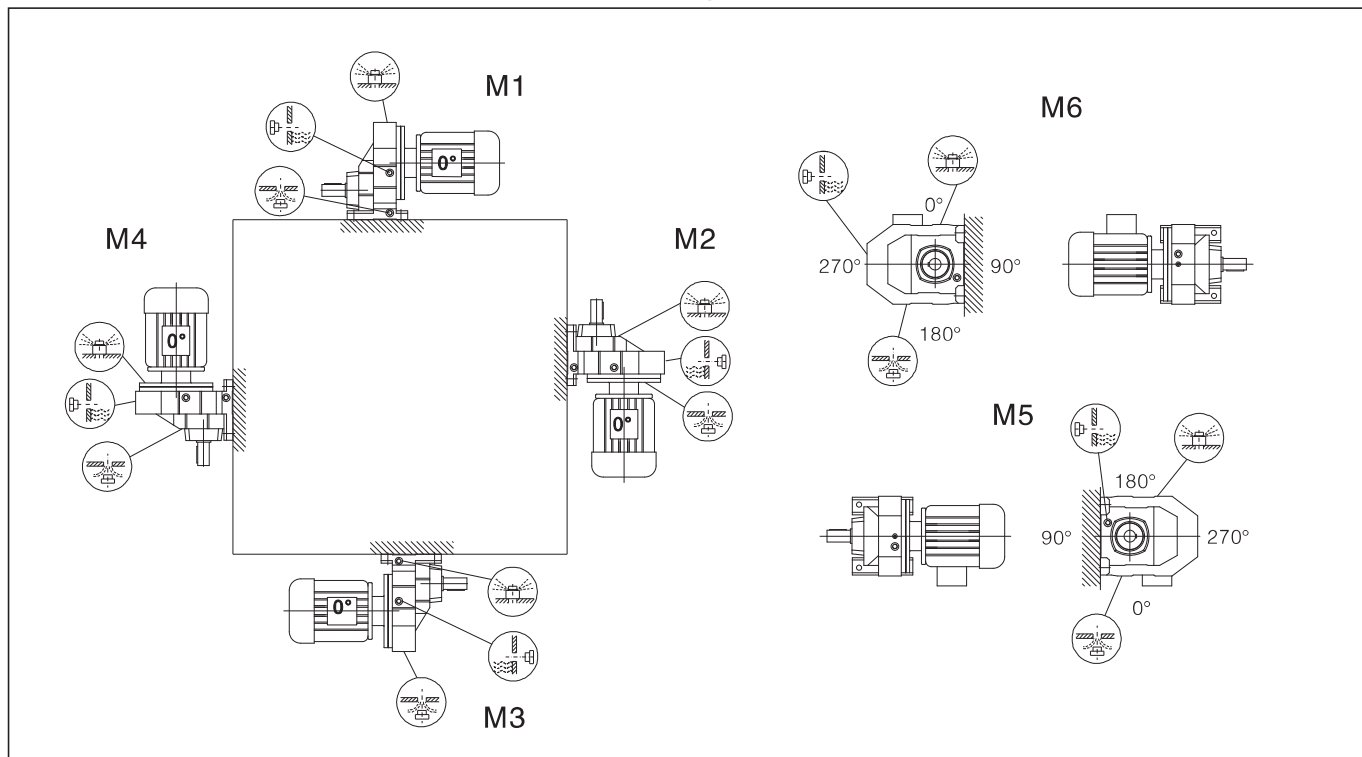

RF51- RF101安装形式图 RF51- RF101 Mounting position example

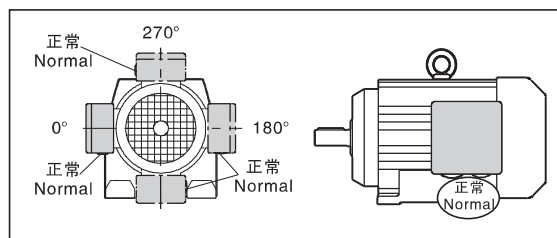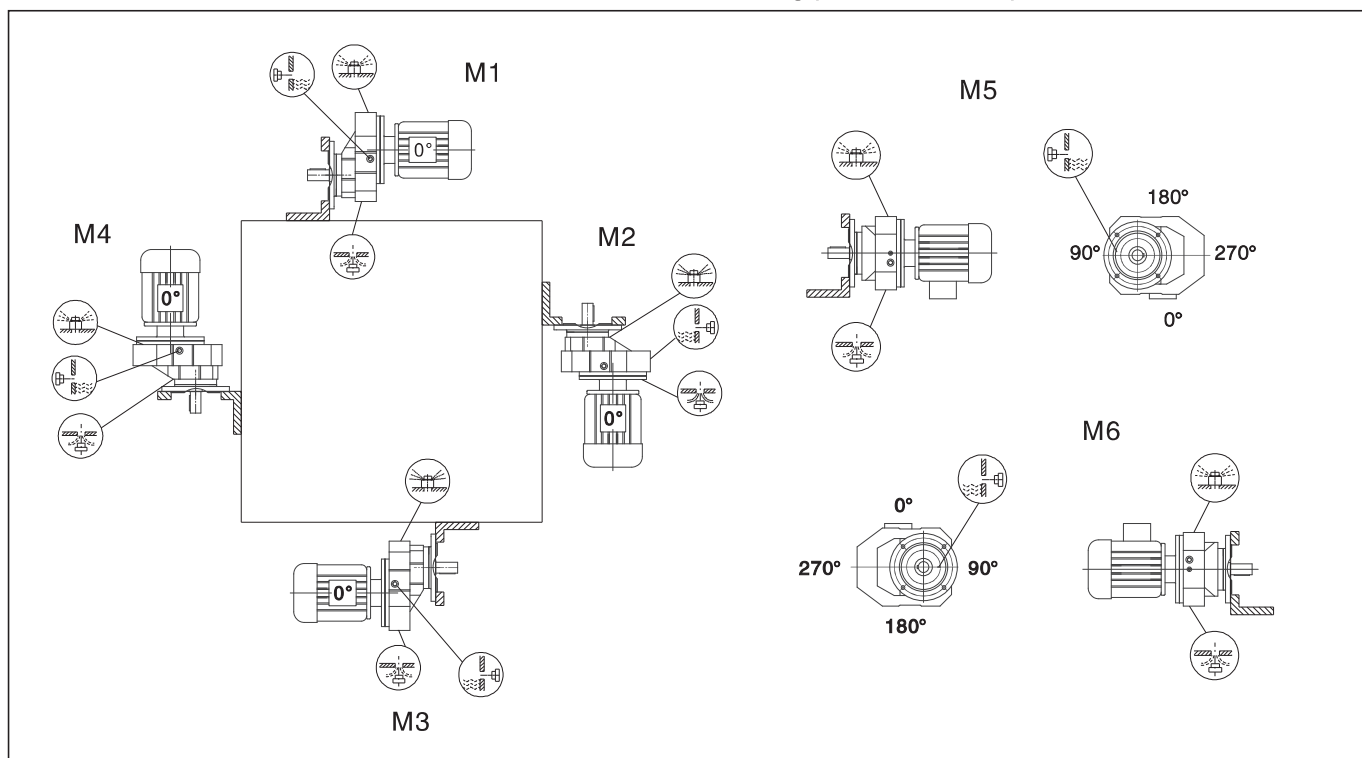


上海承禹机电设备有限公司

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole		
0.12KW						0.12KW							
0.06	14300	21342	0.90	R147 RF147	R77 R77	4P	0.97	950	1430	0.85	R77 RF77	R37 R37	4P
0.08	12000	18210	1.10				1.1	900	1303	0.90			
0.09	10300	15923	1.25				1.2	770	1124	1.05			
0.10	9440	14075	1.40				1.3	715	1047	1.15			
0.11	7630	12344	1.70				1.5	615	915	1.35			
0.12	6780	11143	1.9				0.99	940	1394	0.85			
0.14	6020	9743	2.2				1.1	785	1218	1.05			
0.16	4960	8443	2.6				1.3	710	1084	1.15			
0.19	4290	7307	3.0				1.5	635	940	1.30			
0.21	3780	6447	3.4				1.7	505	821	1.60			
0.25	3270	5568	4.0				1.9	460	731	1.80			
0.11	8390	12921	0.95	R137 RF137	R77 R77	4P	2.1	440	646	1.85	R67 RF67	R37 R37	4P
0.12	7240	11712	1.10				2.7	365	520	2.3			
0.13	6430	10573	1.25				3.1	310	451	2.6			
0.16	5160	8784	1.55				3.3	290	422	2.8			
0.18	4270	7479	1.85				3.8	245	365	3.3			
0.21	4060	6559	1.95				1.4	655	956	0.90			
0.24	3330	5834	2.4				1.5	605	891	1.00			
0.27	3160	5116	2.5	1.9	490	730	1.25						
0.18	4500	7583	0.95	R107 RF107	R77 R77	4P	2.1	425	644	1.40	R57 RF57	R37 R37	4P
0.20	3850	6743	1.10				2.4	375	571	1.60			
0.23	3660	5914	1.20				2.8	315	486	1.90			
0.27	2950	5168	1.45				1.6	565	836	1.05			
0.31	2600	4435	1.65				1.8	475	750	1.25			
0.35	2310	3896	1.85				2.1	420	646	1.40			
0.45	1880	3039	2.3				2.4	380	574	1.55			
0.35	2670	3918	1.6				2.8	330	495	1.80			
0.41	2240	3343	1.9				3.2	275	438	2.2			
0.45	2030	3034	2.1				1.8	525	782	0.85			
0.52	1750	2653	2.5	2.0	440	678	1.05						
0.61	1500	2280	2.9	2.3	395	604	1.15						
0.67	1300	2067	3.3	2.6	360	537	1.25						
0.30	2950	4559	1.00	R97 RF97	R57 R57	4P	2.9	315	471	1.45	R47 RF47	R37 R37	4P
0.34	2500	4004	1.20				3.9	235	357	1.95			
0.40	2200	3481	1.35				4.3	205	319	2.2			
0.29	3240	4678	0.90				3.8	245	359	1.80			
0.32	2970	4309	1.00				4.3	225	324	2.0			
0.37	2510	3702	1.20				4.8	196	290	2.3			
0.46	2010	3019	1.5				5.3	177	262	2.5			
0.52	1750	3668	1.70				5.6	164	246	2.8			
0.61	1440	2245	2.1				6.3	144	220	3.1			
0.68	1280	2016	2.3				2.4	375	572	0.80			
0.80	1160	1733	2.6	2.7	330	510	0.90						
0.45	2020	3065	1.5	3.2	275	436	1.10						
0.51	1790	2722	1.65	3.4	255	408	1.15						
0.60	1510	2311	2.0	4.0	210	344	1.40						
0.66	1360	2078	2.2	2.8	355	502	0.85						
0.76	1170	1823	2.6	3.2	300	429	1.00						
0.87	1020	1583	3.0	3.7	255	372	1.15						
0.99	860	1396	3.5	4.0	240	348	1.25						
1.1	740	1228	4.1	4.6	205	301	1.50						
0.48	1740	2873	0.90	5.4	169	255	1.75	R87 RF87	R57 R57	4P	R37 RF37	R17 R17	4P
0.70	1260	1961	1.25	6.1	150	228	2.0						
0.50	1850	2770	0.85	7.1	125	195	2.4						
0.53	1730	2595	0.90	4.1	220	338	0.90						
0.65	1390	2129	1.10	4.7	205	296	1.00						
0.72	1240	1930	1.25	5.3	176	259	1.15						
0.80	1100	1733	1.40	6.1	155	228	1.30						
0.79	1090	1737	1.40	6.9	134	199	1.50						
0.91	960	1524	1.60	8.0	117	172	1.70						
1.1	775	1303	2.0	4.2	230	328	0.90						
1.2	680	1143	2.3	4.8	197	289	1.00						
1.6	555	885	2.8	5.2	184	265	1.10						
1.8	485	776	3.2	6.1	151	226	1.35						
2.0	430	685	3.6	6.8	138	202	1.45						
2.3	345	599	4.5	7.7	120	179	1.65						

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole		
0.12KW						0.12KW							
6.0	152	229	0.85	R27 RF27	R17 R17	4P	10	112	135.09	1.15	R27 RF27	4P	
6.9	132	200	1.00				11	103	123.91	1.25			
7.8	116	177	1.10				13	88	105.49	1.50			
8.3	111	166	1.15				15	76	90.96	1.70			
6.1	151	227	0.85				16	70	84.78	1.85			
6.8	138	203	0.95				19	62	74.11	2.1			
7.7	121	179	1.10				20	58	69.47	2.2			
8.8	102	156	1.25				23	51	61.30	2.5			
4.6	250	195.24	3.3	R77 RF77	6P	25	46	55.87	2.8				
5.4	210	166.59	3.9			29	40	48.17	3.2				
6.2	186	145.67	4.4			31	37	44.90	3.5				
4.5	255	199.81	2.4	R67 RF67	6P	11	104	81.64	0.80	R17 RF17	6P		
4.9	235	184.07	2.6			13	90	70.39	0.95				
5.7	200	158.14	3.0			14	84	65.61	1.00				
6.5	175	137.67	3.4			16	73	57.35	1.15				
7.0	164	128.97	3.7			17	68	53.76	1.25				
7.9	145	113.94	4.1			19	60	47.44	1.40				
6.9	166	199.81	3.6	R67 RF67	4P	17	68	81.64	1.25	R17 RF17	4P		
7.5	153	184.07	3.9			20	58	70.39	1.45				
4.8	240	186.89	1.90			21	55	65.61	1.55				
5.2	220	172.17	2.0			24	48	57.35	1.80				
6.1	188	147.92	2.4	26	45	53.76	1.90						
7.0	164	128.77	2.7	29	39	47.44	2.2						
7.5	154	120.63	2.9	31	37	44.18	2.3						
8.4	136	106.58	3.3	36	32	38.61	2.7						
9.1	126	98.99	3.6	38	30	36.20	2.8						
7.4	155	186.89	2.9	R57 RF57	4P	43	27	31.94	3.2				
8.0	143	172.17	3.2			49	24	28.32	3.6				
9.3	123	147.92	3.7			57	20	24.07	4.2				
11	107	128.77	4.2			55	21	25.23	4.1				
5.1	225	176.88	1.35	R47 RF47	6P	60	19	23.15	4.4			R17 RF17	4P
5.5	210	162.94	1.45			70	16	19.71	5.2				
6.4	178	139.99	1.70			81	14	16.99	6.0				
7.4	155	121.87	1.95			87	13	15.84	6.4				
7.8	147	176.88	2.0	R47 RF47	4P	100	12	13.84	7.4				
8.5	135	162.94	2.2			106	11	12.98	7.9				
9.9	116	139.99	2.6			121	9.5	11.45	8.5				
11	101	121.87	3.0			136	8.4	10.15	9.2				
12	95	114.17	3.2			160	7.2	8.63	10				
14	84	100.86	3.6			183	6.3	7.55	8.9				
15	78	93.68	3.9			196	5.8	7.04	9.5				
6.7	172	134.82	1.15	R37 RF37	6P	224	5.1	6.15	11				
7.3	157	123.66	1.25			239	4.8	5.76	11				
8.6	134	105.28	1.50			271	4.2	5.09	12				
9.9	116	90.77	1.75			306	3.7	4.51	13				
11	108	84.61	1.85			360	3.2	3.83	14				
12	94	73.96	2.1			227	5.0	6.07	8.6	R61 RF61	4P		
10	112	134.82	1.80	R37 RF37	4P	267	4.3	5.18	17				
11	103	123.66	1.95			305	3.8	4.53	22				
13	87	105.28	2.3			321	3.6	4.30	22				
15	75	90.77	2.7			251	4.6	5.50	8.5	R51 RF51	4P		
16	70	84.61	2.8			272	4.2	5.07	8.6				
19	61	73.96	3.3			317	3.6	4.35	19				
7.3	158	123.91	0.80	R27 RF27	6P	364	3.1	3.79	22				
8.5	134	105.49	0.95			389	2.9	3.55	24				
9.9	116	90.96	1.10			440	2.6	3.14	25				
11	108	84.78	1.20			474	2.4	2.91	28				
12	94	74.11	1.40			523	2.2	2.64	31				
						582	2.0	2.37	35				
							676	1.7	2.04			41	
							719	1.6	1.92			43	
							835	1.4	1.65			49	

上海承禹机电设备有限公司

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole			
0.18KW 0.09 15500 14075 0.85 0.11 12900 12344 1.00 0.12 11600 11143 1.10 0.14 10200 9743 1.25 0.16 8590 8443 1.50 0.18 7430 7307 1.75 0.20 6560 6447 2.0 0.24 5660 5568 2.3 0.27 5120 4926 2.5 0.31 4430 4325 2.9 0.35 3900 3754 3.3 0.40 3380 3302 3.8						0.18KW 1.5 950 858 0.85 1.7 830 575 1.00 2.0 735 671 1.10 2.3 620 571 1.35 1.6 870 821 0.95 1.8 780 731 1.05 2.0 720 646 1.15 2.4 625 560 1.30 2.7 530 488 1.55 3.0 470 436 1.75 3.5 405 373 2.0 4.0 355 327 2.3 4.6 320 289 2.6						R77 RF77	R37 R37	4P
0.15 8930 8784 0.90 0.18 7490 7479 1.05 0.20 6880 6559 1.15 0.23 5840 5834 1.35 0.26 5370 5116 1.50 0.30 4540 4464 1.75 0.34 4000 3928 2.0 0.28 5260 4709 1.50 0.33 4450 4018 1.80 0.38 3850 3514 2.1 0.40 3640 3338 2.2 0.45 3160 2929 2.5						2.3 625 571 0.95 2.7 525 486 1.15 2.3 635 574 0.95 2.7 545 495 1.10 3.0 465 438 1.30 3.4 415 388 1.45 3.8 380 344 1.60 4.5 310 294 1.95 5.1 280 261 2.1						R67 RF67	R37 R37	4P
0.30 4510 4435 0.95 0.34 3990 3896 1.10 0.43 3190 3039 1.35 0.34 4380 3918 1.00 0.39 3700 3343 1.15 0.44 3360 3034 1.30 0.50 2910 2653 1.50 0.58 2500 2280 1.70 0.64 2200 2067 1.95 0.66 2050 1987 2.1 0.72 1840 1827 2.3 0.83 1580 1599 2.7 0.94 1410 1400 3.1 1.1 1210 1226 3.6						2.9 490 454 0.90 3.2 445 410 1.00 2.8 520 471 0.85 3.7 390 357 1.15 4.1 345 319 1.30 4.8 290 273 1.55 5.5 255 241 1.75 6.1 225 215 2.0 3.7 405 359 1.10 4.1 365 324 1.25 4.6 325 290 1.40 5.0 295 262 1.55 5.3 275 246 1.65 6.0 240 220 1.85 7.0 205 188 2.2 8.3 172 159 2.6						R57 RF57	R37 R37	4P
0.49 2920 2668 1.05 0.59 2420 2245 1.25 0.65 2160 2016 1.40 0.76 1920 1733 1.55 0.81 1790 1623 1.70 0.92 1570 1434 1.90 1.1 1300 1207 2.3 1.2 1160 1084 2.6 1.4 990 934 3.0 1.5 920 878 3.2 1.8 785 755 3.8 0.49 2980 2722 1.00 0.57 2520 2311 1.20 0.64 2270 2078 1.30						4.4 335 301 0.90 5.2 285 255 1.05 5.8 250 228 1.20 6.8 210 195 1.40 6.6 220 199 0.90 7.7 192 172 1.05 8.8 167 150 1.20 5.8 250 226 0.80 6.5 230 202 0.90 7.4 200 179 1.00 8.5 171 156 1.15						R47 RF47	R37 R37	4P
0.76 1850 1733 0.85 0.89 1650 1489 0.95 0.95 1540 1395 1.00 1.1 1350 1232 1.15 1.1 1250 1145 1.25 1.3 1120 1037 1.40 1.4 1000 931 1.55 1.6 850 802 1.85 0.76 1850 1737 0.85 0.87 1620 1524 0.95 1.0 1350 1303 1.15 1.2 1180 1143 1.30 1.5 940 885 1.65 1.7 830 776 1.90						9.4 153 141 0.85 11 135 124 0.95 12 121 110 1.10 14 102 94 1.30 9.8 148 135 0.90 11 134 118 0.95 13 117 104 1.10 15 101 90 1.30						R37 RF37	R17 R17	4P
4.5 385 195.24 2.1 5.2 330 166.59 2.5 6.0 290 145.67 2.8 6.3 275 138.39 3.0 7.2 240 121.42 3.4						R77 RF77				6P				

R


上海承禹机电设备有限公司

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole		
0.18KW						0.25KW							
143	12	6.07	3.6	R61 RF61	6P	0.93	2100	1400	2.0	R107 R77 RF107R77	4P		
168	10	5.18	7.3			1.1	1810	1226	2.4				
192	8.9	4.53	9.2			1.4	1410	939	3.0				
202	8.5	4.30	9.4			1.6	1220	822	3.5				
218	7.9	6.07	5.4	R61 RF61	4P	0.64	3160	2016	0.95	R97 R57 RF97 R57	4P		
255	6.7	5.18	11			0.75	2780	1733	1.10				
292	5.9	4.53	14			0.80	2590	1623	1.15				
307	5.6	4.30	14			0.71	2870	1823	1.05				
350	4.9	3.77	18			0.82	2490	1583	1.20				
413	4.2	3.20	24			0.93	2160	1396	1.40				
457	3.8	2.89	28			1.1	1880	1228	1.60				
519	3.3	2.54	36			1.2	1700	1069	1.75				
550	3.1	2.40	40	R51 RF51	6P	1.4	1480	938	2.0	R87 R57 RF87 R57	4P		
646	2.7	2.04	50			1.6	1260	824	2.4				
158	11	5.50	3.6			1.8	1130	737	2.7				
172	10	5.07	3.6			2.1	970	632	3.1				
200	8.6	4.35	7.9	R51 RF51	4P	1.1	1810	1145	0.85	R77 R37 RF77 R37	4P		
230	7.5	3.79	9.2			1.2	1630	1037	0.95				
240	7.2	5.50	5.4			1.4	1460	931	1.05				
261	6.6	5.07	5.4			1.6	1250	802	1.25				
303	5.7	4.35	12			1.1	1750	1143	0.90				
348	4.9	3.79	14			1.5	1380	885	1.10				
372	4.6	3.55	15			1.7	1210	776	1.30				
421	4.1	3.14	16			1.9	1070	685	1.45				
453	3.8	2.91	18	R147 R77 RF147R77	4P	2.2	900	599	1.70	R67 R37 RF67R37	4P		
500	3.4	2.64	20			2.5	795	525	1.95				
557	3.1	2.37	22			2.8	695	456	2.2				
647	2.7	2.04	26			4.9	405	268	3.8				
688	2.5	1.92	28			2.3	900	571	0.90				
799	2.2	1.65	31			2.3	900	560	0.90				
0.25KW						2.7	775	488	1.05				
0.13	15000	9743	0.85	R147 R77 RF147R77	4P	3.0	690	436	1.20			R77 R37 RF77 R37	4P
0.15	12700	8443	1.00			3.5	590	373	1.40				
0.18	11000	7307	1.20			4.0	520	327	1.60				
0.20	9700	6447	1.35			4.5	460	289	1.80				
0.23	8380	5568	1.55			5.0	410	260	2.0				
0.26	7520	4926	1.75			5.8	345	224	2.4				
0.30	6540	4325	2.0			3.3	605	388	1.00	R67 R37 RF67R37	4P		
0.35	5730	3754	2.3			3.8	550	344	1.10				
0.39	4990	3302	2.6	4.4	455	294	1.30						
0.45	4360	2898	3.0	5.0	410	261	1.45						
0.22	8680	5834	0.90	5.6	370	234	1.60	R57 R37 RF57R37	4P				
0.25	7860	5116	1.00	6.5	315	200	1.90						
0.29	6720	4464	1.20	7.4	270	176	2.2						
0.33	5910	3928	1.35	8.2	245	158	2.5						
0.28	7600	4709	1.05	3.4	630	384	0.95						
0.32	6440	4018	1.25	3.6	585	359	1.05						
0.37	5590	3514	1.45	4.2	505	310	1.20						
0.39	5290	3338	1.50	4.9	425	264	1.40						
0.44	4610	2929	1.75	5.5	375	235	1.60						
0.49	4090	2658	1.95	6.5	320	201	1.90						
0.54	3710	2412	2.2	7.2	290	181	2.1						
0.63	3190	2073	2.5	4.1	505	319	0.90			R57 R37 RF57R37	4P		
0.71	2760	1839	2.9	4.8	425	273	1.05						
0.93	2130	1397	3.8	5.4	375	241	1.20						
1.1	1850	1226	4.3	6.1	335	215	1.35						
0.43	4670	3039	0.90	6.9	295	187	1.55						
0.43	4860	3034	0.90	7.9	255	164	1.75						
0.65	3030	1987	1.40	9.2	220	142	2.0						
0.71	2740	1827	1.55	4.0	530	324	0.85						
0.81	2370	1599	1.80	4.5	470	290	0.95						
						5.0	425	262	1.05				
						5.3	395	246	1.15				
						5.9	355	220	1.30				

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole
0.25KW						0.25KW					
5.7	365	228	0.80	R47 R37 RF47R37	4P	8.3	290	106.58	1.55	R57 RF57	6P
6.7	310	195	0.95			8.9	270	98.99	1.70		
7.1	290	182	1.05			7.0	345	186.89	1.30		
8.5	240	154	1.25			7.6	315	172.17	1.40		
8.7	240	150	0.85	R37 R17 RF37 R17	4P	8.8	270	147.92	1.65	R57 RF57	4P
10	205	130	0.95			10	235	128.77	1.90		
10	196	124	1.00			11	220	120.63	2.0		
12	174	110	1.15			12	196	106.58	2.3		
14	148	94	1.35			13	182	98.99	2.5		
8.4	250	156	0.80			14	165	89.71	2.7		
9.7	215	135	0.95			16	148	80.55	3.0		
10	210	127	0.95			19	127	69.23	3.5		
13	169	104	1.20	R97 RF97	8P	7.3	325	176.88	0.90	R47 RF47	4P
14	146	90	1.35			8.0	300	162.94	1.00		
2.3	1020	289.74	3.0			9.3	255	139.99	1.15		
2.7	900	255.71	3.3			11	225	121.87	1.35		
2.8	850	241.25	3.5	R87 RF87	8P	11	210	114.17	1.45		
3.1	760	216.28	4.0			13	185	100.86	1.60		
2.8	870	246.54	1.80			14	172	93.68	1.75		
3.1	760	216.54	2.0			15	156	84.90	1.90		
3.3	720	205.71	2.2	R77 RF77	8P	17	140	76.23	2.1	R37 RF37	4P
3.7	640	181.77	2.4			19	126	68.54	2.4		
4.1	585	166.49	1.40			20	118	64.21	2.5		
4.7	510	145.67	1.60			23	104	56.73	2.9		
4.9	485	138.39	1.70	R77 RF77	6P	25	97	52.69	3.1		
5.6	425	121.42	1.90			27	88	47.75	3.4		
4.5	530	195.24	1.55			9.6	250	134.82	0.80	R27 RF27	4P
5.3	450	166.59	1.80			11	225	123.66	0.90		
6.0	395	145.67	2.1	R77 RF77	4P	12	193	105.28	1.05		
6.7	360	195.24	2.3			14	167	90.77	1.20		
7.8	305	166.59	2.7			15	155	84.61	1.30		
8.9	270	15.67	3.1			18	136	73.96	1.45		
9.4	255	138.39	3.2	R67 RF67	8P	19	127	69.33	1.55		
11	225	121.42	3.7			21	112	61.18	1.80		
4.3	555	158.14	1.10			23	102	55.76	1.95		
4.9	485	137.67	1.25	R67 RF67	6P	27	88	48.08	2.3		
5.3	455	128.97	1.35			29	82	44.81	2.4		
6.0	400	113.94	1.50			33	72	39.17	2.8		
4.4	540	199.81	1.10			35	67	36.72	3.0		
4.8	500	184.07	1.20	R67 RF67	4P	40	60	32.40	3.4		
5.6	430	158.14	1.40			15	156	84.78	0.85	R27 RF27	4P
6.4	375	137.67	1.60			18	136	74.11	0.95		
6.8	350	128.97	1.70			19	128	69.47	1.00		
7.7	310	113.94	1.95			21	113	61.30	1.15		
8.3	285	105.83	2.1	R67 RF67	6P	23	103	55.87	1.25		
6.5	365	199.81	1.65			27	89	48.17	1.45		
7.1	340	184.07	1.80			29	83	44.90	1.60		
8.2	290	158.14	2.1			33	72	39.25	1.80		
9.4	255	137.67	2.4	R67 RF67	4P	35	68	36.79	1.90		
10	235	128.97	2.5			40	60	32.47	2.2		
11	210	113.94	2.9			45	53	28.78	2.5		
12	194	105.83	3.1			53	45	24.47	2.9		
14	176	95.91	3.4	R57 RF57	6P	46	52	28.37	2.5		
15	158	86.11	3.8			50	48	26.09	2.7		
4.7	505	186.89	1.90			58	41	22.32	3.2		
5.1	465	172.17	1.95			67	36	19.35	3.7		
5.9	400	147.92	1.10	R57 RF57	6P	72	33	18.08	3.9		
6.8	350	128.77	1.30			83	29	15.63	4.5		
7.3	325	120.63	1.35			98	24	13.28	5.3		
						110	22	11.86	5.9		
						128	19	10.13	6.6		
						138	17	9.41	7.1		
						159	15	8.16	7.7		
						170	14	7.63	8.0		
						197	12	6.59	8.8		

上海承禹机电设备有限公司

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole
0.25KW						0.25KW					
232	10	5.60	9.6	R27 RF27	4P	637	3.7	2.04	19	R51 RF51	4P
260	9.2	5.00	10			677	3.5	1.92	20		
304	7.8	4.27	11			787	3.0	1.65	23		
325	7.3	4.00	12			0.37KW					
386	6.2	3.37	13			0.19	15800	7307	0.80	R147 R77 RF147R77	4P
23	105	57.35	0.80	0.21	14000	6447	0.95				
24	99	53.76	0.85	0.25	12100	5568	1.10				
27	87	47.44	1.00	0.28	10800	4926	1.20				
29	81	44.18	1.05	0.32	9400	4325	1.40				
34	71	38.61	1.20	0.37	8210	3754	1.60				
36	67	36.20	1.30	0.42	7180	3302	1.80				
41	59	31.94	1.45	0.48	6280	2898	2.1				
46	52	28.32	1.65	R17 RF7	4P	0.31	9670	4464	0.85	R137 R77 RF137R77	4P
54	44	24.07	1.90			0.35	8510	3928	0.95		
52	46	25.23	1.85			0.34	9140	4018	0.90		
56	43	23.15	2.0			0.39	7950	3514	1.00		
66	36	19.71	2.3			0.41	7540	3338	1.05		
77	31	16.99	2.7			0.47	6580	2929	1.20		
82	29	15.84	2.9			0.56	5540	2484	1.45		
94	25	13.84	3.3			0.62	4980	2242	1.60		
100	24	12.98	3.6			0.52	5880	2658	1.35		
114	21	11.45	3.9			0.57	5330	2412	1.50		
128	19	10.15	4.1			0.67	4580	2073	1.75		
151	16	8.63	4.6			0.75	3990	1839	2.0		
172	14	7.55	4.0			0.99	3070	1397	2.6		
185	13	7.04	4.3			1.1	2670	1226	3.0		
211	11	6.15	4.8			1.3	2400	1090	3.3		
226	11	5.76	5.0			1.5	2090	951	3.8		
256	9.3	5.09	5.5	R107 R77 RF107 R77	4P	0.67	4610	2067	0.95		
288	8.3	4.51	5.8			0.82	3760	1693	1.15		
339	7.0	3.83	6.4			0.89	3410	1550	1.25		
433	5.5	615	9.8			0.98	3090	1407	1.40		
461	5.2	5.76	10			1.1	2660	1209	1.60		
523	4.6	5.09	11			1.3	2320	1055	1.85		
590	4.0	4.51	12			0.69	4370	1987	1.00		
694	3.4	3.83	13			0.76	3970	1827	1.10		
145	17	6.07	2.6	R61 RF61	6P	0.86	3440	1599	1.25		
170	14	5.18	5.4			0.99	3040	1400	1.40		
194	12	4.53	6.7			1.1	2640	1226	1.65		
205	12	4.30	6.8			1.5	2040	939	2.1		
						1.7	1770	822	2.4		
214	11	6.07	3.9	R61 RF61	4P	0.96	3240	1434	0.95	R97 R57 RF97 R57	4P
251	9.5	5.18	7.9			1.1	2710	1207	1.10		
287	8.3	4.53	9.9			1.3	2430	1084	1.25		
302	7.9	4.30	10			0.99	3100	1396	0.95		
345	6.9	3.77	13			1.1	2710	1228	1.10		
406	5.9	3.20	17			1.3	2410	1069	1.25		
450	5.3	2.89	20			1.5	2110	938	1.40		
511	4.7	2.54	25			1.7	1820	824	1.65		
542	4.4	2.40	28			1.9	1630	737	1.85		
636	3.8	2.04	35			2.2	1390	632	2.2		
160	15	5.50	2.6	R51 RF51	6P	3.2	960	431	3.1	R87 R57 RF87 R57	4P
174	14	5.07	2.6			3.6	840	379	3.6		
202	12	4.35	5.8			4.1	745	336	4.0		
232	10	3.79	6.7			1.7	1780	802	0.85		
						1.8	1670	754	0.95		
236	10	5.50	3.9	R51 RF51	4P	2.1	1430	649	1.1		
257	9.3	5.07	3.9			1.8	1730	776	0.90		
299	8.0	4.35	8.5			2.0	1530	685	1.00		
343	7.0	3.79	9.9			2.3	1310	599	1.20		
366	6.5	3.55	11			2.6	1150	525	1.35		
414	5.8	3.14	11			3.0	1000	456	1.55		
446	5.3	2.91	13			5.2	585	268	2.7		
492	4.8	2.64	14								
548	4.4	2.37	16								

R

上海承禹机电设备有限公司

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	
0.37KW						0.37KW						
104	34	13.25	5.6	R37	4P	575	6.1	2.40	20	R61	4P	
117	30	11.83	6.0	RF37		675	5.2	2.04	26	RF61		
23	157	61.30	0.85	R27 RF27		4P	207	17	4.35	4.0		R51 RF51
25	143	55.87	0.90		238		15	3.79	4.6			
29	123	48.17	1.05		254		14	3.55	5.0			
31	115	44.90	1.15		251		14	5.50	2.8	R51 RF51	4P	
35	101	39.25	1.30		272		13	5.07	2.8			
38	94	36.79	1.40		317		11	4.35	6.1			
43	83	32.47	1.55		364		9.7	3.79	7.1			
48	74	28.78	1.75		389		9.1	3.55	7.6			
56	63	24.47	2.1		440		8.0	3.14	8.1			
49	73	28.37	1.80		474		7.5	2.91	8.9			
53	67	26.09	1.95		523		6.8	2.64	10			
62	57	22.32	2.3		582		6.1	2.37	11			
71	50	19.35	2.6		676		5.2	2.04	13			
76	46	18.08	2.8		719		4.9	1.92	14			
88	40	15.63	3.2		835		4.2	1.65	16			
104	34	13.28	3.8		0.55KW							
36	99	38.61	0.85	R17 RF17	4P	0.22	19800	6077	0.90	R167 RF167	R97 R97	4P
38	93	36.20	0.90			0.25	17600	5407	1.00			
43	82	31.94	1.05			0.29	15100	4650	1.20			
49	73	28.32	1.15			0.33	13300	4129	1.35			
57	62	24.07	1.40			0.28	16600	4926	0.80	R147 RF147	R77 R77	4P
55	65	25.23	1.30			0.31	14500	4325	0.90			
60	59	23.15	1.45			0.36	12700	3754	1.05			
70	51	19.71	1.70			0.41	11100	3302	1.15			
81	44	16.99	1.95			0.47	9720	2898	1.35			
87	41	15.84	2.1			0.53	8730	2555	1.50			
100	35	13.84	2.4			0.62	7560	2211	1.70			
106	33	12.98	2.6			0.70	6670	1951	1.95			
121	29	11.45	2.8			0.80	5730	1705	2.3			
136	26	10.15	3.0			0.89	5140	1536	2.5			
160	22	8.63	3.3			1.0	4450	1329	2.9			
183	19	7.55	2.9			1.2	3880	1166	3.3			
196	18	7.04	3.1			0.55	8540	2484	0.95	R137 RF137	R77 R77	4P
224	16	6.15	3.4			0.51	9080	2658	0.90			
239	15	5.76	3.6			0.56	8240	2412	0.95			
271	13	5.09	3.9			0.66	7090	2073	1.15			
306	12	4.51	4.2			0.74	6210	1839	1.30			
360	9.8	3.83	4.6			0.85	5350	1598	1.50			
191	19	13.84	4.6	R17 R17	2P	0.97	4760	1397	1.70			
204	17	12.98	4.9			1.1	4150	1226	1.95			
231	15	11.45	5.3			1.2	3710	1090	2.2			
261	14	10.15	5.7			1.4	3240	951	2.5			
307	12	8.63	6.3			1.6	2780	831	2.9			
351	10	7.55	5.5			0.97	4790	1407	0.90	R107 RF107	R77 R77	4P
377	9.4	7.04	5.8			1.1	4120	1209	1.05			
431	8.2	6.15	6.6			1.3	3590	1055	1.20			
460	7.7	5.76	6.9			1.5	3140	979	1.35			
521	6.8	5.09	7.5			1.7	2790	815	1.55			
588	6.0	4.51	8.0			1.9	2450	717	1.75			
691	5.1	3.83	8.8			2.2	2140	626	2.0			
174	20	5.18	3.7	R61 R61	6P	0.97	4730	1400	0.90			
199	18	4.53	4.6			1.1	4120	1226	1.05			
209	17	4.30	4.7			1.2	3690	1104	1.15			
239	15	3.77	5.9			1.5	3170	939	1.35			
227	16	6.07	2.8	R61 RF61	4P	1.7	2760	822	1.55	R97 RF97	R57 R57	4P
267	13	5.18	5.6			1.5	3240	938	0.95			
305	12	4.53	7.1			1.6	2810	824	1.05			
321	11	4.30	7.3			1.8	2520	737	1.20			
366	9.7	3.77	9.0			2.2	2160	632	1.40			
431	8.2	3.20	12			2.4	1880	560	1.60			
478	7.4	2.89	14									
543	6.5	2.54	18									

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole
0.55KW						0.55KW					
2.8	1640	484	1.85	R97 RF97	R57 R57	20	270	69.75	2.2	R67 R67	4P
3.2	1480	431	2.0			22	235	61.26	2.5		
3.6	1290	379	2.3			24	220	56.89	2.7		
4.0	1150	336	2.6			11	465	120.63	0.95	R57 R57	4P
4.6	1010	296	3.0			13	410	106.58	1.10		
5.5	840	249	3.6	R87 RF87	R57 R57	14	380	98.99	1.20		
2.6	1780	525	0.85			15	345	89.71	1.30		
3.0	1550	456	1.00			17	310	80.55	1.45		
3.4	1340	398	1.15			20	265	69.23	1.70		
3.9	1190	352	1.30			21	250	64.85	1.80		
4.4	1030	305	1.50			24	220	57.29	2.0		
2.9	1650	472	0.95			26	205	53.22	2.2		
3.4	1400	400	1.10			28	186	48.23	2.4		
3.8	1260	361	1.25	R77 RF77	R37 R37	31	167	43.30	2.7		
4.9	970	276	0.85			36	144	37.30	3.1		
5.8	830	236	1.00			39	136	35.07	3.3		
6.2	775	221	1.05			52	102	26.31	4.4		
7.3	650	186	1.25	R97 RF97	8P	54	97	24.99	4.7		
2.7	1980	255.71	1.50			62	85	21.93	5.3		
2.8	1860	241.25	1.60			73	72	18.60	6.3		
3.1	1670	216.28	1.80			15	360	93.68	0.85	R47 R47	4P
3.1	1690	289.74	1.75	R97 RF97	6P	16	330	84.90	0.90		
3.5	1490	255.71	2.0			18	295	76.23	1.00		
3.7	1410	241.25	2.1			20	265	68.54	1.15		
4.2	1260	216.28	2.4			21	250	64.21	1.20		
4.7	1120	289.74	2.7	R97 RF97	4P	24	220	56.73	1.35		
5.3	990	255.71	3.0			26	205	52.69	1.45		
5.6	930	241.25	3.2			28	184	47.75	1.65		
6.3	840	216.28	3.6			32	166	42.87	1.80		
3.7	1440	246.54	1.10	R87 R87	6P	37	143	36.93	2.1		
4.2	1260	216.54	1.25			39	134	34.73	2.2		
4.4	1200	205.71	1.30			46	115	29.88	2.6		
4.9	1060	181.77	1.45			51	103	26.74	2.9		
5.8	910	155.34	1.70	R87 R87	4P	58	90	23.28	3.3		
5.5	950	246.54	1.65			62	84	21.81	3.6		
6.3	840	216.54	1.85			22	235	61.18	0.85	R37 RF37	4P
6.6	795	205.71	1.95			24	215	55.76	0.95		
7.5	700	181.77	2.2			28	186	48.08	1.10		
8.8	600	155.34	2.6			30	173	44.81	1.15		
9.6	550	142.41	2.8			35	151	39.17	1.30		
11	485	124.97	3.2			37	142	36.72	1.40		
11	455	118.43	3.4			42	125	32.40	1.60		
13	400	103.65	3.9	R77 R77	4P	47	111	28.73	1.80		
8.2	645	166.59	1.25			56	94	24.42	2.1		
9.3	565	145.67	1.45			61	86	22.27	2.3		
9.8	535	138.39	1.55			70	75	19.31	2.7		
11	470	121.42	1.75			75	70	18.05	2.9		
13	400	102.99	2.1			87	60	15.60	3.3		
15	360	92.97	2.3			103	51	13.25	3.7		
17	315	81.80	2.6			115	46	11.83	4.0		
18	300	77.24	2.8	R67 R67	4P	35	152	39.25	0.85	R27 RF27	4P
21	255	65.77	3.2			37	142	36.79	0.90		
8.6	610	158.14	1.00			42	125	32.47	1.05		
9.9	530	137.67	1.15			47	111	28.78	1.15		
11	500	128.97	1.20			56	95	24.47	1.40		
12	440	113.94	1.35			61	86	22.32	1.50		
13	410	105.83	1.45			70	75	19.35	1.75		
14	370	95.91	1.60			75	70	18.08	1.85		
16	335	86.11	1.80	R67 R67	4P	87	60	15.63	2.2		
18	285	74.17	2.1			102	51	13.28	2.5		
						115	46	11.86	2.8		
						134	39	10.13	3.1		
						145	36	9.41	3.4		
						167	32	8.16	3.7		
						178	29	7.63	3.8		

上海承禹机电设备有限公司

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	
0.55KW						0.55KW						
206	26	6.59	4.2	R27 RF27	4P	823	6.4	1.65	11	R51 RF51	4P	
243	22	5.60	4.6			921	5.7	1.48	12			
272	19	5.00	4.9			1045	5.0	1.30	13			
318	17	4.27	5.3			0.75KW						
340	15	4.00	5.5			0.30	20700	4650	0.85	R167 RF167	R97 R97	4P
404	13	3.37	6.1	0.33	18300	4129	1.00					
						0.52	12000	2657	1.50			
						0.59	10400	2333	1.75			
						0.66	9230	2085	1.95			
						0.96	6510	1438	2.8			
69	76	19.71	1.10	R17 RF17	4P	0.42	15100	3302	0.85	R147 RF147	R77 R77	4P
80	66	16.99	1.30			0.48	13200	2898	1.00			
86	61	15.84	1.40			0.54	11900	2555	1.10			
98	54	13.84	1.60			0.62	10300	2211	1.25			
105	50	12.98	1.70			0.71	9070	1951	1.45			
119	44	11.45	1.85			0.81	7830	1705	1.65	R137 RF137	R77 R77	4P
134	39	10.15	1.95			0.90	7030	1536	1.85			
158	33	8.63	2.2			1.0	6080	1329	2.1			
180	29	7.55	1.90			1.2	5310	1166	2.5			
193	27	7.04	2.0			0.74	8640	1863	0.95			
221	24	6.15	2.3			0.87	7330	1586	1.10			
236	22	5.76	2.4			0.99	6500	1391	1.25			
267	20	5.09	2.6			1.1	5850	1256	1.35			
302	17	4.51	2.8			0.67	9640	2073	0.85			
355	15	3.83	3.0			0.75	8480	1839	0.95			
						0.86	7310	1598	1.10	R107 RF107	R77 R77	4P
						0.99	6480	1397	1.25			
						1.1	5660	1226	1.40			
						1.3	5050	1090	1.60			
						1.5	4410	951	1.80			
						1.7	3810	831	2.1			
						1.9	3320	730	2.4			
						1.3	4890	1055	0.9	R107 RF107	R77 R77	4P
						1.5	4270	919	1.00			
						1.7	3800	815	1.15			
						1.2	5050	1104	0.85			
						1.5	4330	939	1.00			
						1.7	3770	822	1.15			
						3.7	1690	369	2.5			
						4.3	1470	323	2.9			
						2.2	2940	632	1.00	R97 RF97	R57 R57	4P
						2.5	2570	560	1.15			
						2.8	2230	484	1.35			
						3.2	2010	431	1.50			
						3.6	1760	379	1.70			
						4.1	1570	336	1.90			
						4.7	1370	296	2.2			
						5.5	1150	249	2.6			
207	25	4.35	2.7	R51 RF51	6P	3.5	1830	398	0.85	R87 RF87	R57 R57	4P
238	22	3.79	3.1			3.9	1630	352	0.95			
254	21	3.55	3.3			4.5	1400	305	1.10			
287	18	3.14	3.5			5.2	1240	268	1.25			
309	17	2.91	3.9			5.8	1090	236	1.40			
						3.8	1710	361	0.90			
						4.6	1410	300	1.10			
						5.4	1200	256	1.30			
						2.8	2610	251.15	1.65	R107 RF107		8P
						3.0	2390	229.95	1.80			
						3.4	2110	203.16	2.0			
312	17	4.35	4.1	R51 RF51	4P							
359	15	3.79	4.7									
383	14	3.55	5.0									
434	12	3.14	5.4									
467	11	2.91	6.0									
515	10	2.64	6.8									
574	9.2	2.37	7.5									
666	7.9	2.04	8.7									
708	7.4	1.92	9.3									

R

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole
0.75KW						0.75KW					
3.2	2240	216.28	1.35	R97 RF97	8P	39	182	35.07	2.5	R57 R57	4P
3.7	1930	186.30	1.55			46	157	30.18	2.9		
4.1	1760	170.02	1.70			51	140	26.97	3.2		
3.5	2030	255.71	1.45	R97 RF97	6P	52	137	26.31	3.3	R57 R57	4P
3.7	1920	241.25	1.55			55	130	24.99	3.5		
4.2	1720	216.28	1.75			63	114	21.93	4.0		
4.8	1500	289.74	2.0	R97 RF97	4P	74	97	18.60	4.7	R47 R47	4P
5.4	1330	255.71	2.3			20	355	68.54	0.85		
5.7	1250	241.25	2.4			21	335	64.21	0.90		
6.4	1120	216.28	2.7			24	295	56.73	1.00		
7.4	970	186.30	3.1			26	275	52.69	1.10		
8.1	880	170.02	3.4			29	250	47.75	1.20		
4.2	1720	216.54	0.90	R87 RF87	6P	32	225	42.87	1.35	R37 R37	4P
4.4	1640	205.71	0.95			37	192	36.93	1.55		
4.9	1450	181.77	1.05			40	180	34.73	1.65		
5.8	1240	155.34	1.25			46	155	29.88	1.95		
6.3	1130	142.41	1.35			52	139	26.70	2.2		
5.6	1280	246.54	1.20	R87 RF87	4P	58	122	23.59	2.5	R27 R27	4P
6.4	1120	216.54	1.40			52	139	26.74	2.2		
6.7	1070	205.71	1.45			59	121	23.28	2.5		
7.6	940	181.77	1.65			63	113	21.81	2.7		
8.9	810	155.34	1.90			72	100	19.27	3.0		
9.7	740	142.41	2.1			77	93	17.89	3.1		
11	650	124.97	2.4			85	84	16.22	3.3		
12	615	118.43	2.5			29	250	48.08	0.80		
13	540	103.65	2.9	R77 RF77	4P	31	235	44.81	0.85	R17 RF17	4P
15	485	93.38	3.2			35	205	39.17	1.00		
8.3	860	166.59	0.95			38	191	36.72	1.05		
9.5	755	145.67	1.10			43	168	32.40	1.20		
10	720	138.39	1.15			48	149	28.73	1.35		
11	630	121.42	1.30			57	127	24.42	1.60		
13	535	102.99	1.55			62	116	22.27	1.75		
15	485	92.97	1.70			71	100	19.31	2.0		
17	425	81.80	1.95			76	94	18.05	2.1		
18	400	77.24	2.0			88	81	15.60	2.5		
21	340	65.77	2.4	R67 RF67	4P	104	69	13.25	2.8		
24	300	57.68	2.7			117	61	11.83	3.0		
27	270	52.07	3.0			137	53	10.11	3.2		
30	240	45.81	3.5			146	49	9.47	3.4		
32	225	43.26	3.7			48	149	28.78	0.85		
11	670	128.97	0.90			56	127	24.47	1.00		
12	590	113.94	1.00			62	116	22.32	1.10		
13	550	105.83	1.10			71	100	19.35	1.30		
14	500	95.91	1.20			76	94	18.08	1.40		
16	445	86.11	1.35			88	81	15.63	1.60		
19	385	74.17	1.55	R57 RF57	4P	104	69	13.28	1.90		
20	360	69.75	1.65			116	62	11.86	2.1		
23	320	61.26	1.90			136	53	10.13	2.3		
24	295	56.89	2.0			147	49	9.41	2.5		
27	270	51.56	2.2			169	42	8.16	2.7		
30	240	46.29	2.5			181	40	7.63	2.8		
13	555	106.58	0.80			209	34	6.59	3.1		
14	515	98.99	0.90			246	29	5.60	3.4		
15	465	89.71	0.95			276	26	5.00	3.7		
17	420	80.55	1.10			70	102	19.71	0.85		
20	360	69.23	1.25			81	88	16.99	0.95		
21	335	64.85	1.35			87	82	15.84	1.05		
24	295	57.29	1.50			100	72	13.84	1.20		
26	275	53.22	1.65			106	67	12.98	1.25		
29	250	48.23	1.80			121	59	11.45	1.35		
32	225	43.30	2.0			136	53	10.15	1.45		
37	194	37.30	2.3			160	45	8.63	1.60		
						183	39	7.55	1.45		
						196	37	7.04	1.50		
						224	32	6.15	1.70		

上海承禹机电设备有限公司

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole				
0.75KW						1.1KW									
239	30	5.76	1.75	R17 RF17	4P	1.4	6870	1029	1.90	R147 R77 RF147R77	4P				
271	26	5.09	1.95			1.6	5950	889	2.2						
306	23	4.51	2.0			1.8	5240	784	2.5						
360	20	3.83	2.3			2.0	4630	695	2.8						
236	30	11.45	2.7	R17 RF17	2P	1.0	9480	1391	0.85	R137 R77 RF137R77	4P				
266	27	10.15	2.9			1.1	8550	1256	0.95						
313	23	8.63	3.1			1.3	7500	1105	1.05						
358	20	7.55	2.8			1.3	7080	1043	1.15						
384	19	7.04	2.9			1.6	6010	888	1.35						
439	16	6.15	3.3			1.0	9470	1397	0.85						
468	15	5.76	3.5			1.1	8290	1226	0.95						
531	14	5.09	3.8			1.3	7390	1090	1.10						
599	12	4.51	4.0			1.5	6450	951	1.25						
704	10	3.83	4.4	1.7	5590	831	1.45								
199	36	4.53	2.3	1.9	4890	730	1.65								
209	34	4.30	2.3	2.2	4190	629	1.90								
239	30	3.77	2.9	2.5	3770	560	2.1								
281	26	3.20	3.9	2.8	3270	490	2.5								
267	27	5.18	2.8	2.0	4870	717	0.90			R107 R77 RF107R77	4P				
305	24	4.53	3.5	2.3	4100	614	1.05								
321	22	4.30	3.6	2.6	3630	544	1.20								
366	20	3.77	4.4	2.8	3280	492	1.30								
431	17	3.20	6.0	3.3	2780	417	1.55								
478	15	2.89	7.1	3.8	2480	369	1.75								
543	13	2.54	8.9	4.3	2170	323	2.0								
575	13	2.40	9.8	4.9	1910	285	2.2								
675	11	2.04	13	5.5	1690	253	2.5								
743	9.6	1.86	13	R61 RF61	4P	3.2	2930	431	1.00	R97 R57 RF97 R57	4P				
858	8.3	1.61	14			3.7	2580	379	1.15						
238	30	3.79	2.3			4.2	2290	336	1.30						
254	28	3.55	2.4			4.7	2010	296	1.50						
287	25	3.14	2.6			5.6	1680	249	1.80						
309	23	2.91	2.9			6.0	1570	234	1.90						
341	21	2.64	3.3			6.7	1400	209	2.1						
317	23	4.35	3.0			5.2	1810	268	0.85			R87 R57 RF87 R57	4P		
364	20	3.79	3.5			5.9	1600	236	0.95						
389	18	3.55	3.8	6.7	1400	209	1.10								
440	16	3.14	4.0	5.5	1760	256	0.90								
474	15	2.91	4.4	6.0	1590	232	0.95								
523	14	2.064	5.0	R51 RF51	4P	7.2	1350	195	1.15	R107 RF107	8P				
582	12	2.37	5.6			2.7	3880	251.15	1.10						
676	11	2.04	6.5			3.0	3550	229.95	1.20						
719	10	1.92	6.9			3.3	3140	203.16	1.35						
835	8.6	1.65	8.0			4.0	2660	172.34	1.60						
935	7.7	1.48	8.8			3.6	2920	255.71	1.05			R97 RF97	6P		
1060	6.8	1.30	9.3			3.8	2750	241.25	1.10						
1.1KW						4.2	2470	216.28	1.20						
0.53	17700	2657	1.00			R167 R97 RF167R97	4P	4.9	2130					186.30	1.40
0.60	15400	2333	1.15	5.5	1920			255.71	1.55	R97 RF97	4P				
0.67	13700	2082	1.30	5.8	1810			241.25	1.65						
0.75	12300	1877	1.45	6.5	1620			216.28	1.85						
0.84	10900	1670	1.65	7.5	1400			186.30	2.2						
0.97	9600	1438	1.90	8.2	1280			170.02	2.3						
1.1	8540	1279	2.1	9.3	1130			150.78	2.7						
1.2	7420	1123	2.4	11	950			126.75	3.2						
0.63	15000	2211	0.85	R147 R77 RF147R77	4P	12	870	116.48	3.4						
0.72	13300	1951	1.00												
0.82	11500	1705	1.15												
0.91	10300	1536	1.25												
1.0	8940	1329	1.45												
1.2	7810	1166	1.65												

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole
1.1KW						1.1KW					
6.5	1620	216.54	0.95	R87 RF87	4P	52	200	26.70	1.50	R47 RF47	4P
6.8	1540	205.71	1.00			59	177	23.59	1.70		
7.7	1360	181.77	1.15			60	175	23.28	1.70		
9.0	1170	155.34	1.35			64	164	21.81	1.85		
9.8	1070	142.41	1.45			73	145	19.27	2.0		
11	940	124.97	1.65			78	134	17.89	2.2		
12	890	118.43	1.75			86	122	16.22	2.3		
14	450	103.65	2.0			96	109	14.56	2.4		
15	700	93.38	2.2			112	94	12.54	2.7		
17	615	81.92	2.5			119	89	11.79	2.8		
19	545	72.57	2.8			138	76	10.15	3.0		
22	480	63.68	3.2			154	68	9.07	3.2		
23	455	60.35	3.4	R77 RF77	4P	43	245	32.40	0.80	R37 RF37	4P
27	395	52.82	3.9			49	215	28.73	0.95		
12	910	121.42	0.90			57	183	24.42	1.10		
14	775	102.99	1.05			73	145	19.31	1.40		
15	700	92.97	1.20			78	135	18.05	1.50		
17	615	81.80	1.35			90	117	15.60	1.70		
18	580	77.24	1.40			106	99	13.25	1.90		
21	495	65.77	1.65			118	89	11.83	2.1		
24	435	57.68	1.90			139	76	10.11	2.2		
27	390	52.07	2.1			148	71	9.47	2.3		
31	345	45.81	2.4			176	60	7.97	2.6		
32	325	43.26	2.5			210	50	6.67	2.9		
38	275	36.83	3.0	R67 RF67	4P	247	43	5.67	3.3	R27 RF27	4P
42	250	33.47	3.3			277	38	5.06	3.5		
16	645	86.11	0.95			72	145	19.35	0.90		
19	555	74.17	1.10			77	136	18.08	0.95		
20	525	69.75	1.15			90	117	15.63	1.10		
23	460	61.26	1.30			105	100	13.28	1.30		
25	425	56.89	1.40			118	89	11.86	1.45		
27	385	51.89	1.55			138	76	10.13	1.61		
30	345	46.29	1.75			172	61	8.16	1.90		
35	300	39.88	1.95			184	57	7.63	1.95		
37	280	37.50	2.0			212	50	6.59	2.1		
43	240	32.27	2.2			250	42	5.60	2.4		
49	215	28.83	2.4	R57 RF57	4P	280	38	5.00	2.5	R27 RF27	2P
50	210	28.13	2.6			328	32	4.27	2.7		
52	200	26.72	2.7			350	30	4.00	2.8		
60	176	23.44	3.2			415	25	3.37	3.1		
70	149	19.89	4.0			203	52	13.28	2.5		
20	520	69.23	0.85			228	46	11.86	2.8		
22	485	64.85	0.90			267	39	10.13	3.1		
24	430	57.29	1.05			287	37	9.41	3.3		
26	400	53.22	1.15			331	32	8.16	3.7		
29	360	48.23	1.25			354	30	7.63	3.8		
32	325	43.30	1.40			410	26	6.59	4.1		
38	280	37.30	1.60	R47 RF47	4P	482	22	5.60	4.5	R17 RF17	2P
40	265	35.07	1.70			540	20	5.00	4.9		
46	225	30.18	2.0			632	17	4.27	5.2		
52	200	26.97	2.2			675	16	4.00	5.4		
53	197	26.31	2.3			801	13	3.37	6.0		
56	188	24.99	2.4			137	77	19.71	1.10		
64	165	21.93	2.7			159	66	16.99	1.30		
75	140	18.60	3.2			170	62	15.84	1.40		
83	126	16.79	3.6			195	54	13.84	1.60		
29	360	47.75	0.85			208	51	12.98	1.70		
33	320	42.87	0.95			236	45	11.45	1.80		
38	275	36.93	1.10			266	40	10.15	1.95		
40	260	34.73	1.15			313	34	8.63	2.1		
47	225	29.88	1.35								

上海承禹机电设备有限公司

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole		
1.1KW						1.5KW							
358	29	7.55	1.90	R17 RF17	2P	1.4	9650	1043	0.85	R137 RF137	R77 R77	4P	
384	27	7.04	2.0			1.6	8200	888	1.00				
439	24	6.15	2.3			2.0	6440	699	1.25				
468	22	5.76	2.4			2.3	5590	609	1.45				
531	20	5.09	2.6			1.3	10100	1090	0.80				
599	18	4.51	2.7			1.5	8790	951	0.90				
704	15	3.83	3.0			1.7	7640	831	1.05				
249	42	5.63	2.6	R71 RF71	4P	1.9	6680	730	1.20	R107 RF107	R77 R77	4P	
262	40	5.35	2.6			2.2	5740	629	1.40				
296	36	4.73	3.5			2.5	5150	560	1.55				
						2.9	4470	490	1.80				
203	52	4.53	1.60	R61 RF61	6P	3.3	3910	428	2.0	R97 RF97	R57 R57	4P	
214	49	4.30	1.65			3.7	3510	381	2.3				
244	43	3.77	2.0			4.4	2980	323	2.7				
309	34	4.53	2.4	R61 RF61	4P	2.7	4860	528	0.90	R107 RF107	R77 R77	4P	
326	32	4.30	2.5			2.6	4970	544	0.85				
371	28	3.77	3.1			2.9	4490	492	0.95				
438	24	3.20	4.2			3.4	3810	417	1.15				
485	22	2.89	4.9			3.8	3390	369	1.25				
551	19	2.54	6.2			4.4	2960	323	1.45				
583	18	2.40	6.8			3.0	4410	469	1.00				
685	15	2.04	8.8										
754	14	1.86	9.1			4.2	3120	336	0.95				
870	12	1.61	9.4			4.8	2740	296	1.10				
1000	11	1.40	9.9	5.7	2300	249	1.30	R97 RF97	R57 R57	4P			
				6.0	2150	234	1.40						
				6.8	1920	209	1.55						
243	43	3.79	1.60	R51 RF51	6P	3.0	4710	229.95	0.90	R107 RF107		8P	
259	41	3.55	1.70			3.5	4160	203.15	1.05				
293	36	3.14	1.80			4.1	3530	172.34	1.20				
316	33	2.91	2.0			4.4	3250	158.68	1.30				
348	30	2.64	2.3										
369	28	3.79	2.4	R51 RF51	4P	3.7	3910	251.15	1.10	R107 RF107		6P	
394	27	3.55	2.6			4.0	3580	229.95	1.20				
446	24	3.14	2.8			4.5	3160	203.16	1.35				
481	22	2.91	3.1			5.3	2680	172.34	1.60				
530	20	2.64	3.5			5.8	2470	158.68	1.75				
591	18	2.37	3.9			6.5	2210	141.83	1.95				
686	15	2.04	4.5										
729	14	1.92	4.8			5.5	2600	255.71	1.15				
847	12	1.65	5.6			5.8	2450	241.25	1.20				
948	11	1.48	6.1			6.5	2200	216.28	1.35				
1075	9.8	1.30	6.4	7.6	1890	186.30	1.60	R97 RF97		4P			
				8.3	1730	170.02	1.75						
				9.4	1530	150.78	1.95						
				11	1290	126.75	2.3						
				12	1180	116.48	2.5						
				14	1050	403.44	2.8						
				15	940	92.48	3.2						
3.3	3870	426	3.4	R147 RF147	R87 R87	4P	7.8	1850	181.77	0.85	R87 RF87		4P
3.8	3340	368	3.9				9.1	1580	155.34	1.00			
							9.9	1450	142.41	1.05			
							11	1270	124.97	1.20			
0.83	15700	1705	0.85	12	1200	118.43	1.30	R97 RF97		4P			
0.92	14100	1536	0.90	14	1050	103.65	1.45						
1.1	12200	1329	1.05	15	950	93.38	1.65						
1.2	10700	1166	1.20	17	830	81.92	1.85						
1.4	9410	1029	1.40	19	735	72.57	2.1						
1.6	8140	889	1.60	22	645	63.68	2.4						
1.8	7170	784	1.80	23	615	60.35	2.5						
2.0	6340	695	2.0	27	535	52.82	2.9						
2.3	5700	616	2.3	30	485	47.58	3.2						
2.5	5130	558	2.5	34	425	41.74	3.7						
				38	375	36.84	4.1						

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole		
1.5KW						1.5KW							
15	940	92.97	0.85	R77 RF77	4P	73	196	19.31	1.00	R37 RF37	4P		
17	830	81.80	1.00			78	183	18.05	1.10				
18	785	77.24	1.05			90	159	15.60	1.25				
21	670	65.77	1.25			106	135	13.25	1.40				
24	585	57.68	1.40			119	120	11.83	1.50				
27	530	52.07	1.55			140	103	10.11	1.65				
31	465	45.81	1.75			149	96	9.47	1.75				
33	440	43.26	1.85			177	81	7.97	1.95				
38	375	36.83	2.2			211	68	6.67	2.1				
42	340	33.47	2.4			249	58	5.67	2.5				
49	295	29.00	2.8			279	51	5.06	2.6				
56	255	25.23	3.0			326	44	4.32	2.9				
60	240	23.37	3.5			348	41	4.05	3.0				
66	220	21.43	3.8			414	35	3.41	3.2				
75	191	18.80	4.1										
						204	70	13.25	2.7	R37 RF37	2P		
23	620	61.26	0.95	228	63	11.83	2.9						
25	580	56.89	1.05	267	54	10.11	3.2						
27	525	51.56	1.15	285	50	9.47	3.3						
30	470	46.29	1.30	339	42	7.97	3.7						
35	405	39.88	1.45	R67 RF67	4P	90	159	15.63	0.80	R27 RF27	4P		
38	380	37.50	1.50			106	135	13.28	0.95				
44	330	32.37	1.65			119	121	11.86	1.05				
49	295	28.83	1.80			139	103	10.13	1.20				
50	285	28.13	1.90			173	83	8.16	1.40				
53	270	26.72	2.0			185	78	7.63	1.45				
60	240	23.44	2.3			214	67	6.59	1.60				
71	200	19.89	3.0			252	57	5.60	1.75				
79	182	17.95	3.2			282	51	5.00	1.85				
						330	43	4.27	2.0				
27	540	53.22	0.85			353	41	4.00	2.1				
29	490	48.23	0.90			418	34	3.37	2.3				
33	440	43.30	1.00										
38	380	37.30	1.20			228	63	11.86	2.0			R27 RF27	2P
40	355	35.07	1.25			267	54	10.13	2.3				
47	305	30.18	1.45	331	43	8.16	2.7						
52	275	26.97	1.65	354	41	7.63	2.8						
54	265	26.31	1.70	410	35	6.59	3.0						
56	255	24.99	1.75	482	30	5.60	3.3						
64	225	21.93	2.0	540	27	5.00	3.6						
76	189	18.60	2.4	632	23	4.27	3.8						
84	171	16.79	2.6	675	21	4.00	4.0						
95	150	14.77	2.9	801	18	3.37	4.4						
101	142	13.95	3.0										
119	121	11.88	3.4										
						250	57	5.63	1.90	R71 RF71	4P		
38	375	36.93	0.80	264	54	5.35	1.90						
41	355	34.73	0.85	298	48	4.73	2.6						
47	305	29.88	1.00	349	41	4.04	3.5						
53	270	26.77	1.10	381	38	3.70	4.1						
60	240	23.59	1.25	434	33	3.25	5.5						
61	235	23.28	1.25	458	31	3.08	6.2						
65	220	21.81	1.35	523	27	2.70	7.8						
73	196	19.27	1.50	581	25	2.43	8.7						
79	182	17.89	1.60										
87	165	16.22	1.65	312	46	4.53	1.80	R61 RF61	4P				
97	148	14.56	1.80	328	44	4.30	1.85						
112	127	12.54	1.95	374	38	3.77	2.3						
120	120	11.79	2.0	441	33	3.20	3.1						
139	103	10.15	2.2	488	29	2.89	3.6						
155	92	9.07	2.4	555	26	2.54	4.6						
176	81	8.01	2.5	588	24	2.40	5.0						
182	79	7.76	2.1	690	21	2.04	6.4						
203	71	6.96	2.2	759	19	1.86	6.7						
235	61	6.00	2.6	876	16	1.61	7.0						
250	57	5.64	2.7	1005	14	1.40	7.3						
291	49	4.85	3.0										
325	44	4.34	3.3										
368	39	3.83	3.7										

上海承禹机电设备有限公司

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole
1.5KW						2.2KW					
372	39	3.79	1.80	R51 RF51	4P	4.6	4540	203.16	0.95	R107 RF107	6P
397	36	3.55	1.90			5.4	3850	172.34	1.10		
450	32	3.14	2.0			5.9	3550	158.68	1.20		
484	30	2.91	2.3			6.6	3170	141.83	0.35		
534	27	2.64	2.6			5.6	3740	251.15	1.15	R107 RF107	4P
595	24	2.37	2.9			6.1	3430	229.95	1.25		
691	21	2.04	3.3			6.9	3030	203.16	1.40		
734	20	1.92	3.5			8.2	2570	172.34	1.65		
853	17	1.65	4.1			8.9	2360	158.68	1.80		
955	15	1.48	4.5			9.9	2110	141.83	2.0		
1080	13	1.30	4.7			11	1900	127.68	2.3		
2.2KW						12	1720	115.63	2.5		
0.84	22400	1670	0.80	R167 RF167	R97 R97 4P	14	1530	102.53	2.8		
0.98	19500	1438	0.95			15	1380	92.70	3.1		
1.1	17300	1279	1.05			6.5	3220	216.28	0.95		
1.3	15100	1123	1.20			7.6	2780	186.30	1.10		
1.4	13500	999	1.35			8.3	2530	170.02	1.20		
1.6	11600	861	1.55			9.4	2250	150.78	1.35		
1.9	10300	760	1.75			11	1890	126.75	1.60		
2.2	8710	656	2.1			12	1740	116.48	1.75		
2.6	7130	533	1.80	R147 RF147	R87 R87 4P	14	1540	103.44	1.95		
3.0	6150	462	2.1			15	1380	92.48	2.2		
3.3	5740	426	2.3			17	1240	83.15	2.4		
3.8	4960	368	2.6			20	1080	72.17	2.8		
4.3	4390	326	3.0			22	970	65.21	3.1		
1.2	15800	1166	0.80			24	890	59.92	3.4		
1.4	13900	1029	0.95			27	795	53.21	3.8		
1.6	12000	889	1.10			30	710	47.58	4.2		
1.8	10600	784	1.20	R147 RF147	R77 R77 4P	11	1860	124.97	0.85		
2.0	9400	695	1.40			12	1760	118.43	0.90		
2.3	8420	619	1.55			14	1540	103.65	1.00		
2.5	7580	558	1.70			15	1390	93.38	1.10		
2.9	6640	489	1.95			17	1220	81.92	1.25		
2.0	9510	699	0.85			19	1080	72.57	1.45		
2.3	8270	609	0.95			22	950	63.68	1.65		
1.9	9890	730	0.80			23	900	60.35	1.70		
2.2	8500	629	0.95			27	785	52.82	1.95		
2.5	7620	560	1.05			30	710	47.58	2.2		
2.9	6630	490	1.20			34	620	41.74	2.5		
3.3	5790	428	1.40			38	550	36.84	2.8		
3.7	5190	381	1.55	43	485	32.66	3.2				
4.4	4400	323	1.80	41	515	34.40	2.9				
4.8	3960	291	2.0	45	470	31.40	3.3				
5.5	3460	255	2.3	51	415	27.84	3.7				
6.3	3030	223	2.6	60	350	23.40	4.4				
3.8	5010	369	0.85	R107 RF107	R77 R77 4P	66	320	21.51	4.7		
4.4	4390	323	1.00			21	980	65.77	0.85		
4.9	3860	285	1.10			24	860	57.68	0.95		
5.6	3420	253	1.25			27	775	52.07	1.05		
6.6	2900	214	1.50			31	685	45.81	1.20		
4.3	4480	325	0.95			33	645	43.26	1.25		
6.0	3170	234	0.95			38	550	36.83	1.50		
6.8	2840	209	1.05			42	500	33.47	1.65		
3.1	6680	222.60	1.20	R97 RF97	R57 R57 4P	49	430	29.00	1.90		
3.7	5660	188.45	1.40			56	375	25.23	2.1		
4.0	5230	174.40	1.55			60	350	23.37	2.3		
4.5	4690	156.31	1.70			66	320	21.43	2.6		
5.0	4240	141.12	1.90			75	280	18.80	2.8		
5.5	3850	128.18	2.1			79	265	17.82	2.9		
6.2	3410	113.72	2.3			90	230	15.60	3.2		
6.8	3100	103.20	2.6			100	210	14.05	3.4		
						35	595	39.88	1.00	R77 RF77	4P
						38	560	37.50	1.00		
						44	480	32.27	1.10		

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole
2.2KW						2.2KW					
49	430	29.83	1.20	R67 RF67	4P	140	151	10.11	1.15	R37 RF37	4P
60	350	23.44	1.60			149	141	9.47	1.20		
71	295	19.89	2.0			177	119	7.97	1.30		
79	270	17.95	2.2			211	99	6.67	1.45		
89	235	15.79	2.4			249	84	5.67	1.70		
95	220	14.91	2.5			279	75	5.06	1.80		
111	189	12.70	2.8			326	64	4.32	1.95		
122	172	11.54	2.9			348	60	4.05	2.0		
141	149	10.00	3.2			414	51	3.41	2.2		
162	130	8.70	3.4								
181	116	7.79	3.3								
38	555	37.30	0.80	R57 RF57	4P	141	149	19.31	1.35	R37 RF37	2P
40	525	35.07	0.85			151	139	18.05	1.45		
47	450	30.18	1.00			175	120	15.60	1.65		
52	400	26.97	1.10			206	102	13.25	1.85		
64	325	21.93	1.40			231	91	11.83	2.0		
76	275	18.60	1.60			270	78	10.11	2.2		
84	250	16.79	1.80			288	73	9.47	2.3		
95	220	14.77	2.0			342	61	7.97	2.5		
101	210	13.95	2.1			409	51	6.67	2.8		
119	177	11.88	2.3			482	44	5.67	3.3		
131	161	10.79	2.4	R57 RF57	2P	540	39	5.06	3.5	R27 RF27	4P
151	139	9.35	2.7			632	33	4.32	3.8		
156	135	9.06	2.8			675	31	4.05	3.9		
177	119	7.97	3.0			801	26	3.41	4.3		
104	205	26.31	2.2			139	151	10.13	0.80		
109	192	24.99	2.3			214	98	6.59	1.10		
124	169	21.93	2.7			252	83	5.60	1.20		
147	143	18.60	3.1			282	75	5.00	1.30		
163	129	16.79	3.5			330	64	4.27	1.35		
185	114	14.77	3.8			353	60	4.00	1.45		
196	107	13.95	4.0			418	50	3.37	1.55		
73	285	19.27	1.05	R47 RF47	4P	206	102	13.28	1.25	R27 RF27	2P
87	240	16.22	1.15			230	91	11.86	1.40		
97	215	14.56	1.20			270	78	10.13	1.55		
112	187	12.54	1.35			335	63	8.16	1.85		
120	176	11.79	1.40			358	59	7.63	1.90		
139	151	10.15	1.50			414	51	6.59	2.1		
155	135	9.07	1.65			488	43	5.60	2.3		
176	119	8.01	1.70			546	39	5.00	2.5		
182	116	7.76	1.40			639	33	4.27	2.6		
203	104	6.96	1.55			683	31	4.00	2.8		
235	89	6.00	1.75	R47 RF47	2P	810	26	3.37	3.0	R71 RF71	4P
250	84	5.64	1.85			298	70	4.73	1.75		
291	72	4.85	2.1			349	60	4.04	2.4		
325	65	4.34	2.3			381	55	3.70	2.8		
368	57	3.83	2.5			434	48	3.25	3.8		
117	179	23.28	1.70			458	46	3.08	4.2		
125	168	21.81	1.80			523	40	2.70	5.3		
142	148	19.27	2.0			581	36	2.43	5.9		
153	138	17.89	2.1			662	32	2.13	6.3		
168	125	16.22	2.2			750	28	1.88	6.7		
187	112	14.56	2.4	R47 RF47	4P	846	25	1.67	7.0	R61 RF61	4P
218	97	12.54	2.6			991	21	1.42	7.3		
231	91	11.79	2.7			374	56	3.77	1.55		
269	78	10.15	2.9			441	48	3.20	2.1		
301	70	9.07	3.2			488	43	2.89	2.5		
341	62	8.01	3.3			555	38	2.54	3.1		
90	230	15.60	0.85	R37 RF37	4P	588	36	2.40	3.4		
106	198	13.25	0.95			690	30	2.04	4.4		
119	176	11.83	1.05			759	28	1.86	4.6		
						876	24	1.61	4.8		
						1005	21	1.40	5.0		

上海承禹机电设备有限公司

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole
2.2KW						3.0KW					
450	47	3.14	1.40	R51 RF51	4P	6.1	4710	229.95	0.90	R107 RF107	4P
534	39	2.64	1.75			6.9	4160	203.16	1.05		
595	35	2.37	1.95			8.1	3530	172.34	1.20		
691	30	2.04	2.3			8.8	3250	158.68	1.30		
734	29	1.92	2.4			9.9	2900	141.83	1.50		
853	25	1.65	2.8			11	2610	127.68	1.65		
955	22	1.48	3.1			12	2370	115.63	1.80		
1080	19	1.30	3.2			14	2100	102.53	2.0		
3.0KW						3.0KW					
1.2	20900	1123	0.85	R167 RF167	4P	9.3	3090	150.78	0.95	R97 RF97	4P
1.4	18600	999	0.95			11	2590	126.75	1.15		
1.6	16000	861	1.10			12	2380	116.48	1.25		
1.8	14200	760	1.25			14	2120	103.44	1.40		
2.1	12100	656	1.50			15	1890	92.48	1.60		
2.8	9280	503	1.95			17	1700	83.15	1.75		
2.6	9880	533	1.30	R147 RF147	4P	19	1480	72.17	2.0	R87 RF87	4P
3.0	8540	462	1.50			21	1330	65.21	2.2		
3.3	7940	426	1.65			23	1230	59.92	2.5		
3.8	6860	368	1.90			26	1090	53.21	2.8		
4.3	6070	326	2.1			29	970	47.58	3.1		
5.0	5180	280	2.5			33	880	42.78	3.4		
1.6	16600	889	0.80	R147 RF147	4P	38	760	37.13	4.0	R87 RF87	4P
1.8	14700	784	0.90			42	680	33.25	4.2		
2.0	13000	695	1.00			15	1910	93.38	0.80		
2.3	11600	619	1.10			17	1680	81.92	0.90		
2.5	10500	558	1.25			19	1490	72.57	1.05		
2.8	9160	490	0.85			22	1300	63.68	1.20		
3.3	7990	428	1.00	R137 RF137	4P	23	1230	60.35	1.25	R77 RF77	4P
3.7	7150	381	1.10			27	1080	52.82	1.45		
4.3	6070	323	1.30			29	970	47.58	1.60		
4.8	5460	291	1.45			34	850	41.74	1.80		
5.5	4770	255	1.70			38	755	36.84	2.1		
6.3	4180	223	1.90			43	670	32.66	2.3		
2.7	9870	517	0.80			50	570	27.88	2.6		
3.1	8650	453	0.95			41	705	34.40	2.1		
5.5	4730	253	0.90			45	640	31.40	2.4		
6.5	4010	214	1.05	50	570	27.84	2.7				
7.5	3500	187	1.25	60	480	23.40	3.2				
5.5	4870	256	0.90	65	440	21.51	3.4				
3.2	8860	222.60	0.90	R137 RF137	8P	73	390	19.10	3.7	R77 RF77	4P
3.8	7500	188.45	1.05			82	350	17.08	4.0		
4.1	6940	174.40	1.15			91	315	15.35	4.3		
4.6	6220	156.31	1.30			31	940	45.81	0.85		
5.1	5620	141.12	1.40			32	890	43.26	0.95		
5.6	5100	128.18	1.55			38	755	36.83	1.10		
6.3	4520	113.72	1.75			42	685	33.47	1.20		
7.0	4110	103.20	1.95			48	595	29.00	1.40		
8.1	3530	88.70	2.3			55	515	25.23	1.50		
4.2	6780	222.60	1.20	R137 RF137	6P	60	480	23.37	1.70	R77 RF77	4P
5.0	5740	188.45	1.40			65	440	21.43	1.85		
5.4	5320	174.40	1.50			74	385	18.80	2.0		
6.0	4760	156.31	1.70			79	365	17.82	2.1		
6.7	4300	141.12	1.85			90	320	15.60	2.3		
7.3	3910	128.18	2.0			100	290	14.05	2.5		
8.3	3470	113.72	2.3			114	250	12.33	2.7		
9.1	3150	103.20	2.5			129	225	10.88	3.0		
5.9	4840	158.68	0.90			R107 RF107	6P	145	197		
6.6	4320	141.83	1.00	163	176			8.59	3.6		
7.4	3890	127.68	1.10	181	158			7.74	3.8		
				206	139			6.79	4.2		

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole		
3.0KW						3.0KW							
60	480	23.44	1.15	R67 RF67	4P	346	83	2140	1.45	R37	4P		
70	405	19.89	1.45			411	70	2180	1.60	RF37			
78	365	17.95	1.60			277	103	10.11	1.65	R37 RF37			
89	325	15.79	1.75			296	97	9.47	1.70				
94	305	14.91	1.80			351	82	7.97	1.90				
110	260	12.70	2.0			420	68	6.67	2.1				
121	235	11.54	2.1			494	58	5.67	2.5				
140	205	10.00	2.3			553	52	5.06	2.6				
52	550	26.97	0.80	R57 RF57	4P	648	44	4.32	2.8	R27 RF27	4P		
64	450	21.93	1.00			692	41	4.05	3.0				
75	380	18.60	1.20			821	35	3.41	3.2				
83	345	16.79	1.30			250	115	5.60	0.85				
95	300	14.77	1.45			280	102	5.00	0.95				
100	285	13.95	1.50			328	87	4.27	1.00	R27 RF27			
118	245	11.88	1.65			350	82	4.00	1.05				
130	220	10.79	1.75			415	69	3.37	1.15				
150	191	9.35	1.95			425	67	6.59	1.55				
155	185	9.06	2.0			500	57	5.60	1.75				
176	163	7.97	2.2			560	51	5.00	1.85	R27 RF27	2P		
186	154	7.53	2.3			656	44	4.27	2.0				
218	131	6.41	2.6			700	41	4.00	2.1				
240	119	5.82	2.7			831	35	3.37	2.3				
277	103	5.05	3.0										
319	90	4.39	3.1										
128 225 21.93 2.0 151 190 18.60 2.4 167 172 16.79 2.6 190 151 14.77 2.9 201 143 13.95 3.0 236 122 11.88 3.3 259 110 10.79 3.5						217 132 6.45 1.45 252 114 5.56 2.0 276 104 5.07 2.4 311 92 4.50 3.2 370 77 3.78 3.9							
86 330 16.22 0.85 96 300 14.56 0.90 112 255 12.54 0.95 119 240 11.79 1.00 138 210 10.15 1.10 154 186 9.07 1.20 175 164 8.01 1.25 181 159 7.76 1.05 201 143 6.96 1.10 233 123 6.00 1.25 248 115 5.64 1.35 288 99 4.85 1.50 323 89 4.34 1.65 365 78 3.83 1.85						296 97 4.73 1.25 347 83 4.04 1.75 378 76 3.70 2.0 455 63 3.08 3.1							
371 77 3.77 1.15 438 66 3.20 1.55 485 59 2.89 1.80 551 52 2.54 2.3 583 49 2.40 2.5 685 42 2.04 3.2 754 38 1.86 3.3 870 33 1.61 3.5 1000 29 1.40 3.6						446 64 3.14 1.00 530 54 2.64 1.30 591 49 2.37 1.40 686 42 2.04 1.65 729 39 1.92 1.75 847 34 1.65 2.0 948 30 1.48 2.2 1075 27 1.30 2.4							
237 121 11.79 2.0 276 104 10.15 2.2 309 93 9.07 2.4 349 82 8.01 2.5 361 79 7.76 2.1 402 71 6.96 2.2 467 61 6.00 2.5 496 58 5.64 2.7 577 50 4.85 3.0 646 44 4.34 3.3 731 39 3.83 3.7						4.0KW 1.6 21200 861 0.85 1.9 18700 760 0.95 2.2 16000 656 1.10 2.8 12300 503 1.45 3.8 9190 376 1.95 4.2 8180 335 2.2							
139 205 10.11 0.80 148 194 9.47 0.85 176 163 7.97 0.95 210 137 6.67 1.05 247 116 5.67 1.25 277 104 5.06 1.30 324 88 4.32 1.45						2.7 13100 533 1.00 3.1 11300 462 1.15 3.3 10500 426 1.25 3.8 9060 368 1.45							

上海承禹机电设备有限公司

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole
4.0KW						4.0KW					
4.4	8010	326	1.60	R147 RF147	R87 R87 4P	33	1150	42.78	2.6	R97 RF97	4P
5.1	6850	280	1.90			38	1000	37.13	3.0		
5.7	6050	247	2.2			43	890	33.25	3.2		
6.7	5220	214	2.5			44	860	32.05	3.0		
7.5	4620	189	2.8			52	730	27.19	3.5		
8.9	3880	159	3.3			57	675	25.03	4.2		
						63	600	22.37	4.5		
						71	540	20.14	4.8		
2.3	15300	619	0.85	R147 RF147	R77 R77 4P	22	1710	63.68	0.90	R87 RF87	4P
2.5	13800	558	0.95			24	1620	60.35	0.95		
2.9	12100	489	1.10			27	1420	52.82	1.10		
3.4	10200	415	1.25			30	1280	47.58	1.20		
3.7	9430	381	0.85	R137 RF137	R77 R77 4P	34	1120	41.74	1.40		
4.4	8000	323	1.00			39	990	36.84	1.55		
4.9	7200	291	1.10			43	880	32.66	1.75		
5.6	6290	255	1.25			51	750	27.88	2.0		
6.3	5520	223	1.45			41	930	34.40	1.6		
3.8	9440	376	0.85			45	840	31.40	1.85		
4.2	8500	339	0.95	R107 RF107	R77 R77 4P	51	750	27.84	2.1		
4.8	7450	297	1.05			61	630	23.40	2.5		
7.6	4620	187	0.95			66	580	21.51	2.6		
7.3	4840	193	0.90			74	515	19.10	2.8		
8.2	4330	172	1.00	R147 RF147	8P	83	460	17.08	3.0		
4.4	8660	163.57	1.50			92	415	15.35	3.2		
4.9	7790	147.14	1.65			107	360	13.33	3.6		
6.0	6360	120.04	2.0			119	320	11.93	3.8		
6.6	5800	109.48	2.2	R137 RF137	8P	39	990	36.83	0.85	R77 RF77	4P
4.1	9250	174.40	0.85			42	900	33.47	0.90		
4.6	9290	156.31	0.95			49	780	29.00	1.05		
5.1	7490	141.12	1.05			56	680	25.23	1.15		
5.6	6800	128.18	1.20			61	630	23.37	1.30		
6.3	6030	113.72	1.35			66	575	21.43	1.40		
7.0	5470	103.20	1.45	R137 RF137	6P	76	505	18.80	1.55		
4.3	8860	222.60	0.90			80	480	17.82	1.65		
5.1	7500	188.45	1.05			91	420	15.60	1.75		
5.5	6940	174.40	1.15			101	380	14.05	1.90		
6.1	6220	156.31	1.30			115	330	12.33	2.1		
6.8	5620	141.12	1.40			131	295	10.88	2.3		
7.5	5100	128.18	1.55			147	260	9.64	2.4		
8.4	4520	113.72	1.75			165	230	8.59	2.7		
9.3	4110	103.20	1.95	R107 RF107	4P	183	210	7.74	2.9		
11	3530	88.70	2.3			209	183	6.79	3.2		
8.2	4640	172.34	0.95			237	161	5.99	3.3		
8.9	4270	158.68	1.00			267	143	5.31	3.6		
10	3820	141.83	1.15			71	535	19.89	1.10	R67 RF67	4P
11	3430	127.68	1.25			79	485	17.95	1.20		
12	3110	115.63	1.40			90	425	15.79	1.30		
14	2760	102.53	1.55			95	400	14.91	1.35		
15	2490	92.70	1.70			112	340	12.70	1.50		
18	2110	78.57	2.0			123	310	11.54	1.60		
19	1960	72.88	2.2			142	270	10.00	1.75		
22	1760	65.60	2.4			163	235	8.70	1.90		
24	1600	59.41	2.7	R97 RF97	4P	182	210	7.79	1.80		
27	1420	52.68	3.0			193	198	7.36	1.85		
12	3130	116.48	0.95			227	169	6.27	1.95		
14	2780	103.44	1.10			249	153	5.70	2.0		
15	2490	92.48	1.20			288	133	4.93	2.2		
17	2240	83.15	1.35			331	116	4.29	2.3		
20	1940	72.17	1.55			76	500	18.60	0.90	R57 RF57	4P
22	1750	65.21	1.70			85	450	16.79	1.00		
24	1610	59.92	1.85			96	395	14.77	1.10		
27	1430	53.21	2.1			102	375	13.95	1.15		
30	1280	47.58	2.3			120	320	11.88	1.25		
						132	290	10.79	1.35		
						152	250	9.35	1.45		

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole
4.0KW						5.5KW					
157	245	9.06	1.55	R57 RF57	4P	2.2	22000	656	0.80	R167 RF167	R97 R97 4P
178	215	7.97	1.65			2.5	19300	579	0.95		
189	205	7.53	1.75			2.8	16900	503	1.05		
222	172	6.41	1.95			3.3	14400	432	1.25		
244	157	5.82	2.0			3.8	12600	376	1.45		
281	136	5.05	2.2			4.3	11200	335	1.60		
323	118	4.39	2.4			4.7	10100	303	1.80		
						5.1	9310	279	1.95		
140	275	10.15	0.85	R47 RF47	4P	3.1	15500	462	0.85	R147 RF147	R87 R87 4P
157	245	9.07	0.90			3.3	14400	426	0.90		
177	215	8.01	0.95			3.9	12400	368	1.05		
204	187	6.96	0.85			4.4	11000	326	1.20		
237	161	6.00	0.95			5.1	9410	280	1.40		
252	152	5.64	1.00			5.8	8300	247	1.55		
293	131	4.85	1.15			6.7	7170	214	1.80		
327	117	4.34	1.25			7.6	6340	189	2.0		
371	103	3.83	1.40								
176	215	16.22	1.25	R47 RF47	2P	3.1	17000	229.71	1.05	R167 RF167	8P
196	195	14.56	1.35			3.8	13800	186.93	1.30		
228	168	12.54	1.50			4.6	11300	153.07	1.60		
242	158	11.79	1.55			5.1	10400	139.98	1.75		
282	136	10.15	1.70			5.8	9010	121.81	2.0		
315	121	9.07	1.80								
357	107	8.01	1.90			4.3	12100	163.31	1.10	R147 RF147	8P
369	104	7.76	1.55			4.8	10900	146.91	1.20		
411	93	6.96	1.70			5.9	8870	119.86	1.45		
477	80	6.00	1.95			6.5	8090	109.31	1.60		
507	75	5.64	2.1								
589	65	4.85	2.3			5.9	8930	163.57	1.45	R147 RF147	6P
660	58	4.34	2.5			6.5	8040	147.14	1.60		
746	51	3.83	2.8			8.0	6560	120.14	2.0		
						8.8	5980	109.48	2.2		
255	150	5.56	1.50	R81 RF81	4P	10	5180	94.75	2.5		
280	137	5.07	1.85			12	4570	83.60	2.8		
316	121	4.50	2.4								
375	102	3.78	3.0			5.5	9480	128.18	0.85	R137 RF137	8P
						6.2	8410	113.72	0.95		
351	109	4.04	1.30	R71 RF71	4P	6.9	7630	103.20	1.05		
383	100	3.70	1.55			8.0	6560	88.70	1.20		
437	87	3.25	2.1								
461	83	3.08	2.3			5.5	9540	174.40	0.85	R137 RF137	6P
527	73	2.70	3.0			6.1	8550	156.31	0.95		
585	65	2.43	3.3			6.8	7720	141.12	1.05		
667	57	2.13	3.5			7.5	7010	128.18	1.15		
755	51	1.88	3.7			8.4	6220	113.72	1.30		
852	45	1.67	3.9			9.3	5650	103.20	1.40		
998	38	1.42	4.1								
444	86	3.20	1.15	R61 RF61	4P	6.4	8180	222.60	1.00	R137 RF137	4P
492	78	2.89	1.35			7.6	6920	188.45	1.15		
559	68	2.54	1.75			8.2	6410	174.40	1.25		
592	65	2.40	1.90			9.1	5740	156.31	1.40		
695	55	2.04	2.4			10	5180	141.12	1.55		
765	50	1.86	2.5			11	4710	128.18	1.70		
883	43	1.61	2.6			13	4180	113.72	1.90		
1015	38	1.40	2.8			14	3790	103.20	2.1		
						16	3260	88.70	2.5		
538	71	2.64	0.95	R51 RF51	4P	18	2970	80.91	2.7	R107 RF107	4P
599	64	2.37	1.10			19	2700	73.49	3.0		
696	55	2.04	1.25			22	2390	65.20	3.3		
740	52	1.92	1.35			24	2170	59.17	3.7		
859	44	1.65	1.55			28	1870	50.86	4.3		
962	40	1.48	1.70								
1090	35	1.30	1.80			11	4690	127.68	0.90	R107 RF107	4P
						12	4250	115.63	1.00		
						14	3770	102.53	1.15		
						15	3400	92.70	1.25		
						18	2890	78.57	1.50		
						20	2680	72.88	1.60		

上海承禹机电设备有限公司

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole
5.5KW						5.5KW					
22	2410	65.60	1.80	R107 RF107	4P	331	159	8.70	2.8	R67 RF67	6P
24	2180	59.41	1.95			369	142	7.79	2.7		
27	1930	52.68	2.2			391	134	7.36	2.8		
30	1750	47.63	2.5			460	114	6.27	2.9		
35	1480	40.37	2.9			506	104	5.70	3.0		
						584	90	4.93	3.2		
						671	78	4.29	3.5		
17	3050	83.15	1.00	R97 RF97	4P	97	545	14.77	0.80	R57 RF57	4P
20	2650	72.17	1.15			103	510	13.95	0.85		
22	2390	65.21	1.25			120	435	11.88	0.95		
24	2200	59.92	1.35			132	395	10.79	1.00		
27	1950	53.21	1.55			153	345	9.35	1.10		
30	1750	47.58	1.70			179	295	7.97	1.20		
33	1570	42.78	1.90			190	275	7.53	1.25		
39	1360	37.13	2.2			223	235	6.41	1.40		
43	1220	33.25	2.4			246	215	5.82	1.50		
52	1010	27.58	2.6			283	185	5.05	1.65		
45	1180	32.05	2.2			326	161	4.39	1.75		
53	1000	27.19	2.6								
57	920	25.03	3.1								
64	820	22.37	3.3								
71	740	20.14	3.5								
78	670	18.24	3.7								
88	595	16.17	4.0								
30	1750	47.58	0.90	R87 RF87	4P	308	171	9.35	2.2	R57 RF57	2P
34	1530	41.74	1.00			361	145	7.97	2.4		
39	1350	36.84	1.15			383	137	7.53	2.5		
44	1200	32.66	1.30			449	117	6.41	2.9		
51	1020	27.88	1.45			494	106	5.82	3.0		
51	1020	27.84	1.50			571	92	5.05	3.3	R47 RF47	4P
61	860	23.40	1.80			656	80	4.39	3.5		
66	790	21.51	1.90								
75	700	19.10	2.0								
84	625	17.08	2.2								
93	565	15.35	2.4			230	230	12.54	1.10	R47 RF47	2P
107	490	13.33	2.6			244	215	11.79	1.15		
120	440	11.93	2.8			284	185	10.15	1.25		
144	365	9.90	3.2			318	165	9.07	1.35		
156	335	9.14	3.6			359	146	8.01	1.40		
174	300	8.22	3.8			480	109	6.00	1.45		
200	260	7.13	4.1			511	103	5.64	1.50		
						593	89	4.85	1.70		
						664	79	4.34	1.85		
						752	70	3.83	2.1		
76	690	18.80	1.15	R77 RF77	4P	216	245	6.63	1.90	R101 RF101	4P
80	655	17.82	1.20			255	205	5.61	2.2		
92	575	15.60	1.30			276	191	5.19	3.7		
102	515	14.05	1.40			307	171	4.65	4.1		
116	455	12.33	1.50								
131	400	10.88	1.65			247	215	5.79	1.95	R91 RF91	4P
148	355	9.64	1.80			291	180	4.91	2.2		
166	315	8.59	2.0			316	166	4.52	3.6		
185	285	7.74	2.2			354	149	4.04	4.0		
211	250	6.79	2.3			393	134	3.64	4.4		
239	220	5.99	2.5			434	121	3.30	4.9		
269	195	5.31	2.6			489	107	2.92	5.5		
						541	97	2.64	6.1		
						638	82	2.24	7.2		
						731	72	1.96	7.9		
						874	60	1.64	8.4		
						1010	52	1.42	8.8		
91	580	15.79	0.95	R67 RF67	4P	318	165	4.50	1.75	R81 RF81	4P
96	550	14.91	1.00			378	139	3.78	2.2		
113	465	12.70	1.10			411	128	3.48	3.2		
124	425	11.54	1.20			463	113	3.09	3.6		
143	365	10.00	1.30			518	101	2.76	4.0		
164	320	8.70	1.40			576	91	2.48	4.4		
183	285	7.79	1.35			664	79	2.15	4.9		
194	270	7.36	1.35								
228	230	6.27	1.45								
251	210	5.70	1.50								
290	181	4.93	1.60								
333	158	4.29	1.70								

R

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole
5.5KW						7.5KW					
440	119	3.25	1.50	R71 RF71	4P	7.6	9440	188.45	0.85	R137 RF137	4P
464	113	3.08	1.70			8.2	8730	174.40	0.90		
530	99	2.70	2.2			9.1	7830	156.31	1.00		
589	89	2.43	2.4			10	7070	141.12	1.15		
671	78	2.13	2.6			11	6420	128.18	1.25		
761	69	1.88	2.7			13	5700	113.72	1.40		
858	61	1.67	2.8			14	5170	103.20	1.55		
1005	52	1.42	3.0			16	4440	88.70	1.80		
563 93 2.54 1.25 596 88 2.40 1.40 700 75 2.04 1.80 770 68 1.86 1.85 889 59 1.61 1.95 1020 51 1.40 2.0						18	4050	80.91	1.95	R107 RF107	4P
						19	3680	73.49	2.2		
						22	3270	65.20	2.5		
						24	2960	59.17	2.7		
						28	2550	50.86	3.1		
						15	4640	92.70	0.95		
700 75 2.04 0.90 745 71 1.92 1.00 866 61 1.65 1.15 969 54 1.48 1.25 1095 48 1.30 1.30						18	3940	78.57	1.10	R97 RF97	4P
						20	3650	72.88	1.20		
						22	3290	65.60	1.30		
						24	2980	59.41	1.45		
						27	2640	52.68	1.65		
						30	2390	47.63	1.80		
						35	2020	40.37	2.1		
						41	1770	35.26	2.4		
2.8 23100 503 0.80 3.3 19800 432 0.90 3.8 17300 376 1.05 4.3 15400 335 1.15 4.7 13900 303 1.30 5.1 12800 279 1.40						48	1480	29.49	2.9	R87 RF87	4P
						46	1540	30.77	2.8		
						52	1380	27.58	3.1		
						57	1250	24.90	3.5		
						63	1130	22.62	3.8		
						24	3000	59.92	1.00		
						27	2670	53.21	1.15		
						30	2380	47.58	1.25		
4.4 15000 326 0.85 5.1 12900 280 1.00 5.8 11400 247 1.15 6.7 9810 214 1.30 7.6 8680 189 1.50 9.0 7290 159 1.80						33	2140	42.78	1.40	R167 RF167	8P
						39	1860	37.13	1.60		
						43	1670	33.25	1.75		
						52	1380	27.58	1.95		
						45	1610	32.05	1.60		
						53	1360	27.19	1.90		
						57	1250	25.03	2.3		
						64	1120	22.37	2.4		
3.1 22900 229.71 0.80 3.8 18600 186.93 0.95 4.7 15200 153.07 1.20 5.1 13900 139.98 1.30 5.9 12100 121.81 1.50						71	1010	20.14	2.6	R147 RF147	6P
						78	910	18.24	2.7		
						39	1840	36.84	0.85		
						44	1640	32.66	0.95		
						51	1400	27.88	1.05		
						51	1390	27.84	1.10		
						61	1170	23.40	1.30		
						66	1080	21.51	1.40		
4.2 17100 229.71 1.05 5.1 13900 186.93 1.30 6.3 11400 153.07 1.60 6.9 10400 139.98 1.70 7.9 9090 121.81 2.0 8.9 8020 107.49 2.2 10 6950 93.19 2.6 12 6190 82.91 2.9 13 5500 73.70 3.3 14 5030 67.40 3.6						75	960	19.10	1.50	R147 RF147	6P
						84	860	17.08	1.65		
						93	770	15.35	1.75		
						107	670	13.33	1.90		
						120	600	11.93	2.1		
						144	495	9.90	2.4		
						156	460	9.14	2.6		
						174	410	8.22	2.8		
4.4 16200 163.57 0.80 4.9 14600 147.14 0.90 6.0 11900 120.04 1.10 6.6 10900 109.48 1.20						200	355	7.13	3.0	R77 RF77	4P
						224	320	6.39	3.2		
						270	265	5.30	3.4		
						76	940	18.80	0.85		
						80	890	17.82	0.85		
						92	780	15.60	0.95		
						102	705	14.05	1.00		
						116	615	12.33	1.10		
5.9 12200 163.57 1.05 6.5 11000 147.14 1.20 8.0 8940 120.04 1.45 8.8 8150 109.48 1.60 10 7060 94.75 1.85 12 6230 83.60 2.1						131	545	10.88	1.20	R77 RF77	4P
						148	485	9.64	1.30		
						166	430	8.59	1.45		

上海承禹机电设备有限公司

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole
7.5KW						7.5KW					
185	390	7.74	1.55	R77 RF77	4P	563	127	2.54	0.95	R61 RF61	4P
211	340	6.79	1.70			596	120	2.40	1.00		
239	300	5.99	1.80			700	102	2.04	1.30		
269	265	5.31	1.90			770	93	1.86	1.35		
						889	81	1.61	1.40		
						1020	70	1.40	1.50		
11KW						11KW					
113	635	12.70	0.80	R67 RF67	4P	4.9	19600	295	0.90	R167 RF167	R107 R107 4P
124	580	11.54	0.85			5.3	18100	270	1.00		
143	500	10.00	0.95			6.3	15300	229	1.20		
164	435	8.70	1.00			7.2	13400	200	1.35		
183	390	7.79	0.95			8.5	11300	169	1.60		
194	370	7.36	1.00			5.0	19800	291	0.90		
228	315	6.27	1.05								
251	285	5.70	1.10								
290	245	4.93	1.15								
333	215	4.29	1.25								
15KW						15KW					
179	400	7.97	0.90	R57 RF57	4P	4.3	22500	335	0.80	R167 RF167	R97 R97 4P
190	375	7.53	0.95			4.8	20300	303	0.90		
223	320	6.41	1.05			5.2	18700	279	0.95		
246	290	5.82	1.10								
283	255	5.05	1.20								
326	220	4.39	1.25								
22KW						22KW					
196	365	14.77	1.20	R57 RF57	2P	5.8	16600	247	0.80	R147 RF147	R87 R87 4P
208	345	13.95	1.25			6.7	14300	214	0.90		
244	295	11.88	1.40			7.6	12700	189	1.05		
269	265	10.79	1.45			9.1	10700	159	1.20		
310	230	9.35	1.60								
364	197	7.97	1.80								
385	186	7.53	1.90								
452	158	6.41	2.1								
498	144	5.82	2.2								
575	125	5.05	2.5								
660	108	4.39	2.6								
30KW						30KW					
216	330	6.63	1.40	R101 RF101	4P	5.1	20500	186.93	0.90	R167 RF167	6P
255	280	5.61	1.60			6.3	16700	153.07	1.05		
276	260	5.19	2.7			6.9	15300	139.98	1.20		
307	235	4.65	3.0			7.9	13300	121.81	1.35		
340	210	4.20	3.9								
37KW						37KW					
247	290	5.79	1.45	R91 RF91	4P	6.5	16100	147.14	0.80	R147 RF147	6P
291	245	4.91	1.60			8.0	13100	120.04	1.00		
316	225	4.52	2.6			8.8	12000	109.48	1.10		
354	205	4.04	2.9			10	10400	94.75	1.25		
393	182	3.64	3.3			12	9130	83.60	1.40		
434	165	3.30	3.6								
489	146	2.92	4.1								
45KW						45KW					
318	225	4.50	1.30	R81 RF81	4P	8.8	11900	163.57	1.10	R147 RF147	4P
378	189	3.78	1.60			9.8	10700	147.14	1.20		
411	174	3.48	2.3			12	8740	120.04	1.50		
463	155	3.09	2.6			13	7970	109.48	1.65		
518	138	2.76	2.9			15	6900	94.75	1.90		
576	124	2.48	3.3			17	6090	83.60	2.1		
664	108	2.15	3.6			20	5260	72.20	2.5		
741	97	1.93	3.7			22	4890	67.09	2.7		
894	80	1.60	3.9	24	4460	61.19	2.9				
1030	70	1.39	4.2	27	3860	52.96	3.4				
55KW						55KW					
10	10300	141.12	0.80	R71 RF71	4P	10	10300	141.12	0.80	R137 RF137	4P
11	9350	128.18	0.85			11	9350	128.18	0.85		
13	8300	113.72	0.95			13	8300	113.72	0.95		
14	7530	103.20	1.05			14	7530	103.20	1.05		
16	6470	88.70	1.25			16	6470	88.70	1.25		
18	5900	80.91	1.35			18	5900	80.91	1.35		
20	4360	73.49	1.50			20	4360	73.49	1.50		
22	4760	65.20	1.70			22	4760	65.20	1.70		
24	4320	59.17	1.85			24	4320	59.17	1.85		
28	3710	50.86	2.2			28	3710	50.86	2.2		
32	3240	44.39	2.5			32	3240	44.39	2.5		
38	2750	37.65	2.9			38	2750	37.65	2.9		
44	2400	32.91	3.3	44	2400	32.91	3.3				

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole				
11KW						11KW									
22	4790	65.60	0.90	R 107 RF107	4P	545	193	2.64	3.1	R91 RF91	4P				
24	4330	59.41	1.00			643	163	2.24	3.6						
27	3840	52.68	1.10			736	143	1.96	4.0						
30	3470	47.63	1.25			880	119	1.64	4.2						
36	2940	40.37	1.45			1015	103	1.42	4.4						
41	2570	35.26	1.65												
49	2150	29.49	2.0			414	255	3.48	1.60	R81 RF81	4P				
47	2240	30.77	1.90			466	225	3.09	1.80						
52	2010	27.58	2.1			522	200	2.76	2.0						
58	1820	24.90	2.4			580	181	2.48	2.2						
64	1650	22.62	2.6			669	157	2.15	2.5						
72	1460	20.07	2.9			747	141	1.93	2.5						
79	1330	18.21	3.2			900	117	1.60	2.7						
						1035	102	1.39	2.9						
34	3120	42.78	0.95	R97 RF97	4P	593	177	2.43	1.20	R71 RF71	4P				
39	2710	37.13	1.10			676	155	2.13	1.30						
43	2430	33.25	1.20			766	137	1.88	1.35						
52	2010	27.58	1.35			864	122	1.67	1.40						
64	1630	22.37	1.65			1010	104	1.42	1.50						
71	1470	20.14	1.80												
79	1330	18.24	1.90			15KW									
89	1180	16.17	2.0			6.4	20700	229	0.85	R167 RF167	R107 R107	4P			
98	1070	14.62	2.2			7.3	18100	200	1.00						
116	900	12.39	2.4			8.6	15200	169	1.20						
133	790	10.83	2.7			6.4	20800	227	0.85						
155	675	9.29	3.0			7.4	18100	198	1.00						
172	610	8.39	3.3												
202	520	7.12	3.8			6.3	22600	153.07	0.80	R167 RF167		6P			
232	455	6.21	4.2			6.9	20700	139.98	0.85						
						8.0	18000	121.81	1.00						
						9.0	15900	107.49	1.15						
67	1570	21.51	0.95	R87 RF87	4P	6.4	22500	229.71	0.80	R167 RF167	4P				
75	1390	19.10	1.05			7.8	18300	186.93	1.00						
84	1250	17.08	1.10			9.5	15000	153.07	1.20						
94	1120	15.35	1.20			10	13700	139.98	1.30						
108	970	13.33	1.30			12	12000	121.81	1.50						
121	870	11.93	1.40			14	10500	107.49	1.70						
145	720	9.90	1.65			16	9140	93.19	1.95						
158	665	9.14	1.80			18	8130	82.91	2.2						
175	600	8.22	1.95			20	7230	73.70	2.5						
202	520	7.13	2.1			22	6610	67.40	2.7						
225	465	6.39	2.2												
272	385	5.30	2.3												
132	795	10.88	0.85			R77 RF77	4P	8.9	16100			109.48	0.80	R147 RF147	6P
149	705	9.64	0.90					10	14000			94.75	0.95		
186	565	7.74	1.10	12	12300			83.60	1.05						
212	495	6.79	1.15	13	10600			72.20	1.20						
240	435	5.99	1.25	14	9890			67.09	1.30						
271	390	5.31	1.30												
277	380	5.19	1.85	R101 RF101	4P	8.9	16000	163.57	1.80	R147 RF147	4P				
310	340	4.65	2.0			9.9	14400	147.14	0.90						
343	305	4.20	2.7			12	11800	120.04	1.10						
377	280	3.81	3.0			13	10700	109.48	1.20						
425	245	3.38	3.4			15	9280	94.75	1.40						
469	225	3.07	3.7			17	8190	83.60	1.60						
545	193	2.64	4.3			20	7070	72.20	1.85						
						22	6570	67.09	2.0						
						24	5990	61.19	2.2						
						28	5190	52.96	2.5						
						31	4580	46.73	2.8						
318	330	4.52	1.80	R91 RF91	4P	14	10100	103.20	0.80	R137 RF137	4P				
356	295	4.04	2.0			16	8700	88.70	0.90						
396	265	3.64	2.2			18	7940	80.91	1.00						
437	240	3.30	2.5			20	7210	73.49	1.10						
493	215	2.92	2.8												


上海承禹机电设备有限公司

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole
15KW						15KW					
22	6400	65.20	1.25	R137 RF137	4P	420	340	3.48	1.20	R81 RF81	4P
25	5800	59.17	1.40			473	305	3.09	1.35		
29	4990	50.86	1.60			529	270	2.76	1.50		
33	4360	44.39	1.85			588	245	2.48	1.65		
39	3690	37.65	2.2			678	210	2.15	1.80		
44	3230	32.91	2.5			757	189	1.93	1.90		
52	2730	27.83	2.8			913	157	1.60	2.0		
						1050	137	1.39	2.1		
31						18.5KW					
36	4670	47.63	0.90	R107 RF107	4P	7.8	22500	186.93	0.80	R167 RF167	4P
41	3960	40.37	1.10			9.6	18500	153.07	1.00		
50	3460	35.26	1.25			10	16900	139.98	1.05		
47	3020	30.77	1.40			12	14700	121.81	1.25		
53	2710	27.58	1.60			14	13000	107.49	1.40		
59	2440	24.90	1.75			16	11200	93.19	1.60		
65	2220	22.62	1.95			18	10000	82.91	1.80		
73	1970	20.07	2.2			20	8890	73.70	2.0		
80	1790	18.21	2.4			22	8130	67.40	2.2		
93	1540	15.65	2.8			25	7070	58.65	2.5		
107	1340	13.66	3.2								
53						12					
58	2460	25.03	1.15	R97 RF97	4P	13	14500	120.04	0.90	R147 RF147	4P
65	2200	22.37	1.25			15	13200	109.48	1.00		
72	1980	20.14	1.30			18	11400	94.75	1.15		
80	1790	18.24	1.40			20	10100	83.60	1.30		
90	1590	16.17	1.50			22	8690	72.20	1.50		
100	1430	14.62	1.60			24	8080	67.09	1.60		
118	1220	12.39	1.80			28	7370	61.19	1.75		
135	1060	10.83	1.95			31	6380	52.96	2.0		
157	910	9.29	2.2			36	5630	46.73	2.3		
174	820	8.39	2.5				4860	40.35	2.7		
205	700	7.12	2.9								
235	610	6.21	3.1								
85						18					
95	1680	17.08	0.85	R87 RF87	4P	20	9760	80.91	0.80	R137 RF137	4P
110	1510	15.35	0.90			22	8860	73.49	0.90		
122	1310	13.33	1.00			25	7860	65.20	1.00		
147	1170	11.93	1.05			29	7140	59.17	1.10		
160	970	9.90	1.20			33	6130	50.86	1.30		
178	900	9.14	1.35			39	5350	44.39	1.50		
205	810	8.22	1.45			45	4540	37.65	1.75		
229	700	7.13	1.55			53	3970	32.91	2.0		
275	625	6.39	1.65			50	3360	27.83	2.3		
	520	5.30	1.75			61	3570	29.57	2.2		
				67	2910	24.12	2.8				
				77	2650	22.00	3.0				
				87	2300	19.04	3.5				
					2030	16.80	4.0				
281						36					
314	510	5.19	1.35	R101 RF101	4P	42	4870	40.37	0.90	R107 RF107	4P
348	455	4.65	1.50			50	4250	35.26	1.00		
383	410	4.20	2.0			59	3560	29.49	1.20		
431	375	3.81	2.2			65	3000	24.90	1.45		
475	330	3.38	2.5			73	2730	22.62	1.60		
553	300	3.07	2.8			80	2420	20.07	1.80		
634	260	2.64	3.2			94	2200	18.21	1.95		
747	225	2.30	3.7			107	1890	15.65	2.3		
855	192	1.95	4.0			126	1650	13.66	2.6		
1010	168	1.71	4.2			145	1400	11.59	3.1		
	142	1.44	4.6			186	1220	10.13	3.5		
						220	950	7.86	3.1		
							800	6.66	3.7		
323						73					
361	445	4.52	1.35	R91 RF91	4P	80	2430	20.14	1.05	R97 RF97	4P
401	395	4.04	1.50			91	2200	18.24	1.15		
443	355	3.64	1.65			100	1950	16.17	1.25		
499	325	3.30	1.85			118	1760	14.62	1.30		
552	285	2.92	2.1			135	1490	12.39	1.45		
652	260	2.64	2.3			158	1310	10.83	1.60		
746	220	2.24	2.7				1120	9.29	1.80		
892	192	1.96	3.0								
1030	161	1.64	3.2								
	139	1.42	3.3								

输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole				
18.5KW						22KW									
175	1010	8.39	2.0	R97 RF97	4P	22	9350	65.20	0.85	R137 RF137	4P				
206	860	7.12	2.3			25	8480	59.17	0.95						
236	750	6.21	2.5			29	7290	50.86	1.10						
282	625	5.20	2.8			33	6370	44.39	1.25						
326	545	4.50	3.0			39	5400	37.65	1.50						
						45	4720	32.91	1.70						
110	1610	13.33	0.80	R87 RF87	4P	53	3990	27.83	1.90						
123	1440	11.93	0.85			50	4240	29.57	1.85						
148	1190	9.90	1.00			61	3460	24.12	2.3						
160	1100	9.14	1.10			67	3150	22.00	2.5						
178	990	8.22	1.15			77	2730	19.04	2.9						
205	860	7.13	1.25			87	2410	16.80	3.3						
229	770	6.39	1.30			101	2080	14.51	3.8						
276	640	5.30	1.40			114	1840	12.83	4.3						
349	505	4.20	1.65	R101 RF101	4P	42	5060	35.26	0.85	R107 RF107	4P				
384	460	3.81	1.80			50	4230	29.49	1.00						
433	410	3.38	2.0			59	3570	24.90	1.20						
477	370	3.07	2.2			65	3240	22.62	1.35						
555	320	2.64	2.6			73	2880	20.07	1.50						
636	280	2.30	3.0			80	2610	18.21	1.65						
750	235	1.95	3.2			94	2240	15.65	1.90						
858	205	1.71	3.4			107	1960	13.66	2.2						
1015	174	1.44	3.7			126	1660	11.59	2.6						
				145	1450	10.13	3.0								
402	440	3.64	1.35	R91 RF91	4P	171	1230	8.56	3.5						
444	400	3.30	1.50			186	1130	7.86	2.6						
501	355	2.92	1.70			220	960	6.66	3.1						
554	320	2.64	1.85			252	840	5.82	3.6						
654	270	2.24	2.2												
749	235	1.96	2.4			73	2890	20.14	0.90						
895	197	1.64	2.6			80	2620	18.24	0.95						
1035	171	1.42	2.7			91	2320	16.17	1.05						
						100	2100	14.62	1.10						
531	335	2.76	1.20	R81 RF81	4P	118	1780	12.39	1.25	R97 RF97	4P				
590	300	2.48	1.35			135	1550	10.83	1.35						
680	260	2.15	1.50			158	1330	9.29	1.50						
760	235	1.93	1.55			175	1200	8.39	1.70						
916	193	1.60	1.65			206	1020	7.12	1.95						
1055	168	1.39	1.75			236	890	6.21	2.1						
						282	745	5.20	2.4						
						326	645	4.50	2.5						
22KW															
9.6	22000	153.07	0.80	R167 RF167	4P	148	1420	9.90	0.85			R87 RF87	4P		
10	20100	139.98	0.90			160	1310	9.14	0.90						
12	17500	121.81	1.05			178	1180	8.22	1.00						
14	15400	107.49	1.15			205	1020	7.13	1.05						
16	13400	93.19	1.35			229	920	6.39	1.10						
18	11900	82.91	1.50			276	760	5.30	1.20						
20	10600	73.70	1.70												
22	9670	67.40	1.85												
25	8410	58.65	2.1												
28	7420	51.76	2.4												
33	6430	44.87	2.8												
13	15700	109.48	0.85			R147 RF147	4P	349	600	4.20	1.40	R101 RF101	4P		
15	13600	94.75	0.95					384	545	3.81	1.50				
18	12000	83.60	1.10	433	485			3.38	1.70						
20	10300	72.20	1.25	477	440			3.07	1.90						
22	9610	67.09	1.35	555	380			2.64	2.2						
24	8760	61.19	1.50	636	330			2.30	2.5						
28	7580	52.96	1.70	750	280			1.95	2.7						
31	6690	46.73	1.95	858	245			1.71	2.9						
36	5780	40.35	2.2	1015	205			1.44	3.1						
41	5110	35.69	2.5												
49	4300	30.00	3.0												
								402	520	3.64	1.15	R91 RF91	4P		
								444	475	3.30	1.25				
						501	420	2.92	1.40						
						554	380	2.64	1.55						
						654	320	2.24	1.85						
						749	280	1.96	2.0						
						895	235	1.64	2.2						
						1035	205	1.42	2.2						

上海承禹机电设备有限公司



输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole	输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole		
22KW						30KW							
531	395	2.76	1.00	R81 RF81	4P	283	1010	5.20	1.75	R97 RF97	4P		
590	355	2.48	1.15			327	880	4.50	1.85				
680	310	2.15	1.25			434	660	3.38	1.25	R101 RF101	4P		
760	275	1.93	1.30			479	600	3.07	1.40				
916	230	1.60	1.35			557	515	2.64	1.60				
1055	200	1.39	1.45			638	450	2.30	1.85				
30KW						752	380	1.95	2.0			R91 RF91	4P
14	20900	107.49	0.85	R167 RF167	4P	860	335	1.71	2.1				
16	18200	93.19	1.00			1020	280	1.44	2.3				
18	16200	82.91	1.10			503	570	2.92	1.05				
20	14400	73.70	1.25			556	515	2.64	1.15				
22	13100	67.40	1.35			656	435	2.24	1.35				
25	11400	58.65	1.55			751	380	1.96	1.50				
28	10100	51.76	1.80			898	320	1.64	1.60				
33	8740	44.87	2.1			1040	275	1.42	1.65				
37	7780	39.92	2.3			37KW							
43	6710	34.41	2.7			16	22400	93.19	0.80	R167 RF167	4P		
53	5450	24.96	3.3			18	19900	82.91	0.90				
62	4620	23.71	3.9			20	17700	73.70	1.00				
						22	16200	67.40	1.10				
18	16300	83.60	0.80	R147 RF147	4P	25	14100	58.65	1.30				
20	14000	72.20	0.95			28	12400	51.76	1.45				
22	13100	67.09	1.00			33	10800	44.87	1.65				
24	11900	61.19	1.10			37	9600	39.92	1.90				
28	10300	52.96	1.25			43	8270	34.41	2.2				
32	9090	46.73	1.45			53	6720	27.96	2.7				
36	7850	40.35	1.65			48	7380	30.71	1.35				
41	6950	35.69	1.85			60	5900	24.57	2.4				
49	5840	30.00	2.2			67	5250	21.85	2.5				
61	4710	24.23	2.5			77	4580	19.03	3.5				
72	3980	20.47	3.0			87	4080	16.98	3.7				
82	3510	18.06	3.0										
94	3050	15.66	4.3			22	16100	67.09	0.80			R147 RF147	4P
						24	14700	61.19	0.90				
29	9910	50.86	0.80	R137 RF137	4P	28	12700	52.96	1.00				
33	8650	44.39	0.90			32	11200	46.73	1.15				
39	7340	37.65	1.10			36	9680	40.35	1.35				
45	6410	32.91	1.25			41	8570	35.69	1.50				
53	5420	27.83	1.40			49	7200	30.00	1.80				
61	4700	24.12	1.70			61	5810	24.23	2.0				
67	4290	22.00	1.85			72	4910	20.47	2.4				
77	3710	19.04	2.2			82	4340	18.06	2.4				
88	3270	16.80	2.4			94	3760	15.66	3.5				
101	2830	14.51	2.8			106	3340	13.93	3.8				
115	2500	12.83	3.2										
136	2100	10.79	3.8			39	9050	37.65	0.90	R137 RF137	4P		
194	1480	7.59	3.5			45	7910	32.91	1.00				
230	1240	6.38	4.1			53	6690	27.83	1.15				
						61	5800	24.12	1.40				
73	3910	20.07	1.10	R107 RF107	4P	67	5290	22.00	1.50				
81	3550	18.21	1.20			77	4580	19.04	1.75				
94	3050	15.65	1.40			88	4040	16.80	2.0				
108	2660	13.66	1.60			101	3490	14.51	2.3				
127	2260	11.59	1.90			115	3080	12.83	2.6				
145	1970	10.13	2.2			136	2590	10.79	3.1				
172	1670	8.56	2.6			169	2090	8.71	3.7				
187	1530	7.86	1.95			194	1820	7.59	2.8				
221	1300	6.66	2.3			230	1530	6.38	3.3				
252	1140	5.82	2.6			285	1240	5.15	3.7				
299	960	4.92	3.0										
101	2850	14.62	0.80	R97 RF97	4P	73	4820	20.07	0.90	R107 RF107	4P		
119	2420	12.39	0.90			81	4380	18.21	1.00				
136	2110	10.83	1.00			94	3760	15.65	1.15				
158	1810	9.29	1.10			108	3280	13.66	1.30				
175	1640	8.39	1.25			127	2790	11.59	1.55				
207	1390	7.12	1.45			145	2430	10.13	1.75				
237	1210	6.21	1.55										

R

上海承禹机电设备有限公司



输出转速 Output speed (r/min)	输出转矩 Output torque (N.M)	传动比 Ratio (i)	使用系数 Service factor (f _B)	机型号 Type	电机级数 Motor pole
75KW					
179	4000	8.28	3.2	R147 RF147	4P
204	3510	7.25	2.5		
251	2850	5.89	3.0		
296	2420	5.00	3.6		
90KW					
37	23200	39.92	0.80	R167 RF167	4P
43	20000	34.41	0.90		
53	16200	27.96	1.10		
62	13800	23.71	1.30		
60	14300	24.57	1.00		
68	12700	21.85	1.00		
78	11100	19.03	1.45		
87	9860	16.98	1.50		
102	8410	14.48	2.1		
123	3630	11.99	2.4		
145	5940	10.24	2.9		
72	11900	20.47	1.00	R147 RF147	4P
82	10500	18.06	1.00		
95	9080	15.66	1.45		
106	8080	13.93	1.55		
123	6960	12.01	1.85		
152	5660	9.76	2.3		
179	4800	8.28	2.7		
204	4210	7.25	2.1		
251	3420	5.89	2.5		
296	2900	5.00	3.0		
110KW					
53	19800	27.96	0.90	R167 RF167	4P
63	16800	23.71	1.05		
78	13500	19.03	1.20		
87	12000	16.98	1.25		
103	10200	14.48	1.75		
124	8480	11.99	2.0		
145	7240	10.24	2.3		
130KW					
63	20100	23.71	0.90	R167 RF167	4P
78	16200	19.03	1.00		
87	14400	16.98	1.05		
103	12300	14.48	1.45		
124	10200	11.99	1.65		
145	8690	10.24	1.95		
160KW					
103	14900	14.48	1.20	R167 RF167	4P
124	12300	11.99	1.40		
145	10500	10.24	1.60		

R17

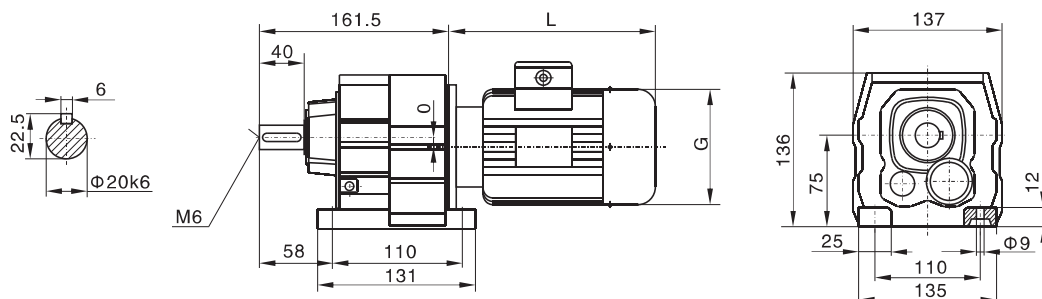



RF17

($\Phi 120$)


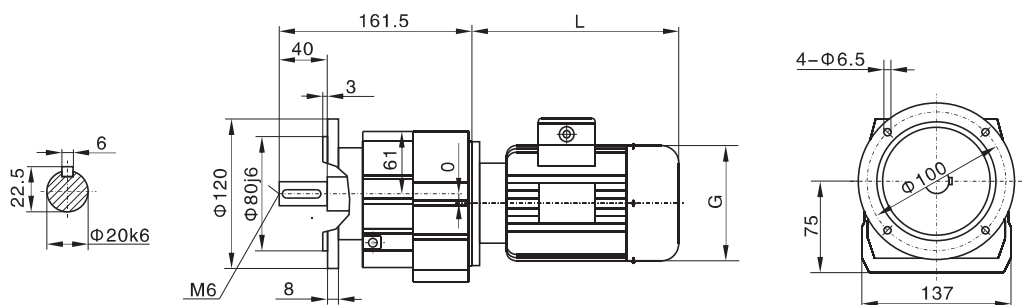


RF17

($\Phi 140$)

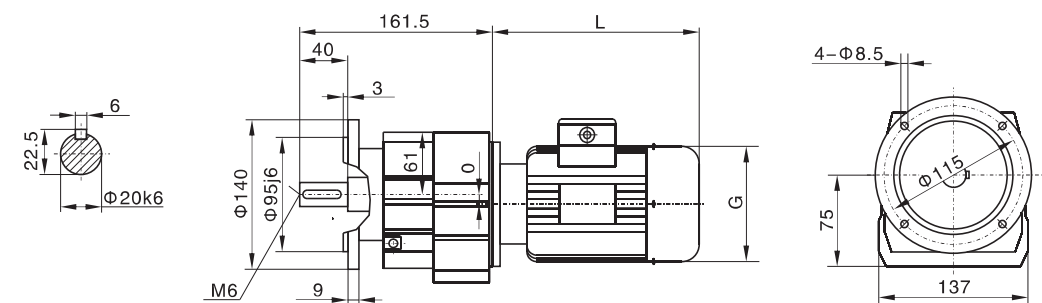



R27

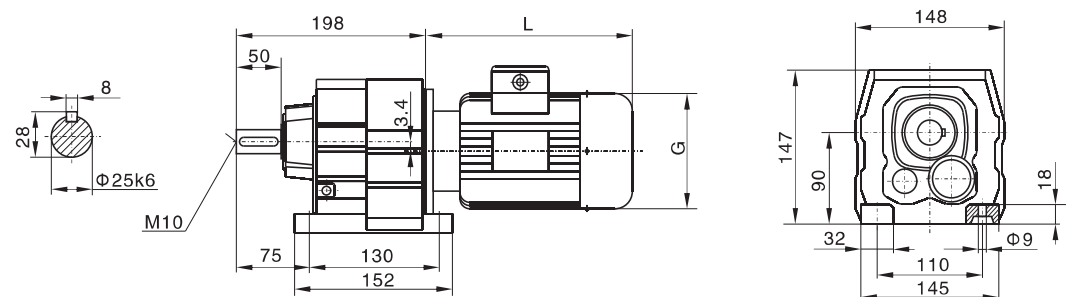

上海承禹机电设备有限公司



RF27

(Φ120)

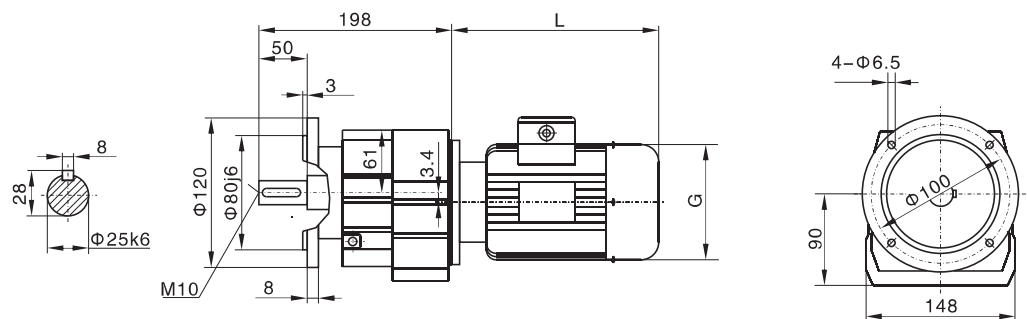



RF27

(Φ140)

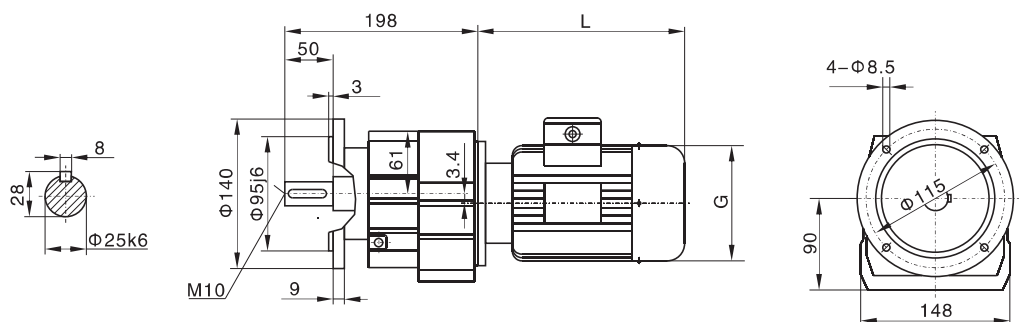


RF27


(Φ160)

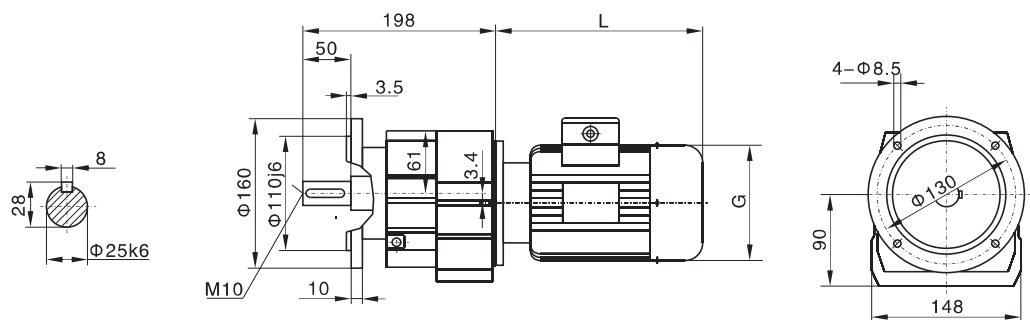


R..27 R17

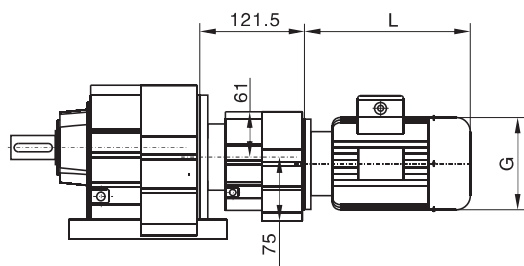



电机需方配或配特殊电机
时需加联接法兰



R..S27


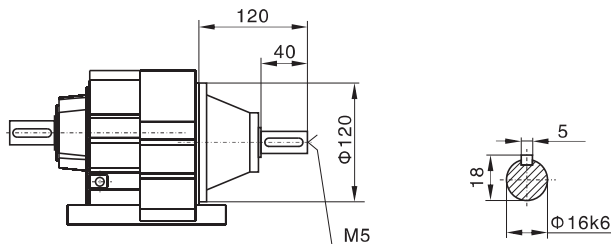


R37

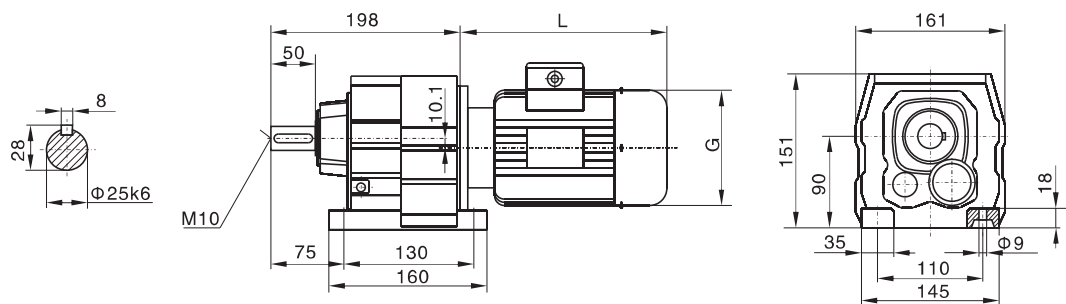



RF37

(Φ120)

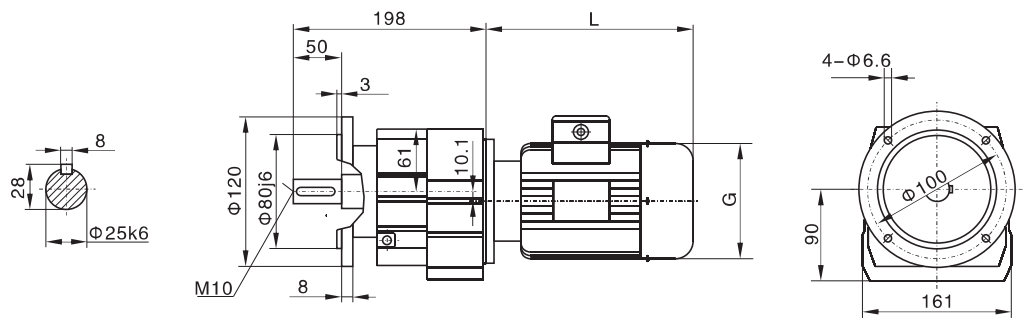

RF37



(Φ160)

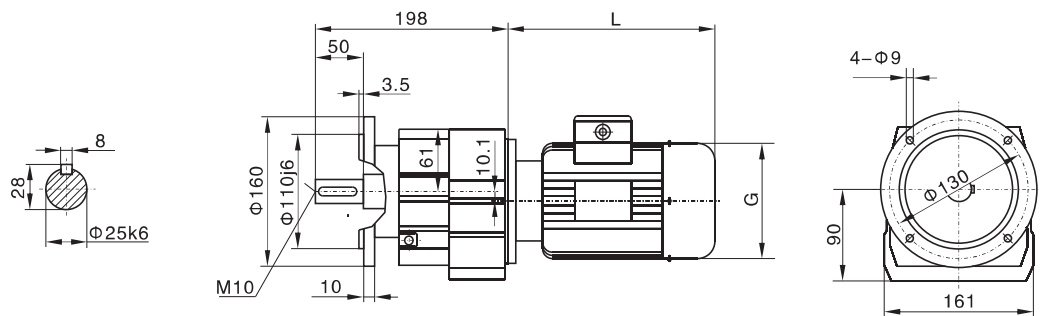


上海承禹机电设备有限公司

RF37


(Φ200)

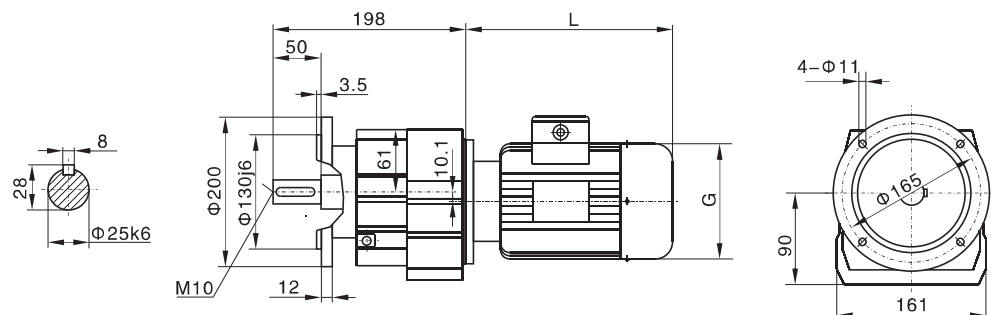


R..37 R17

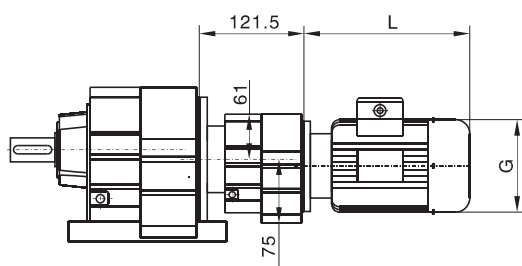



电机需方配或配特殊电机
时需加联接法兰



R..S37



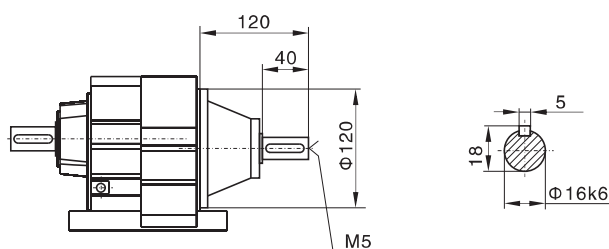


R47

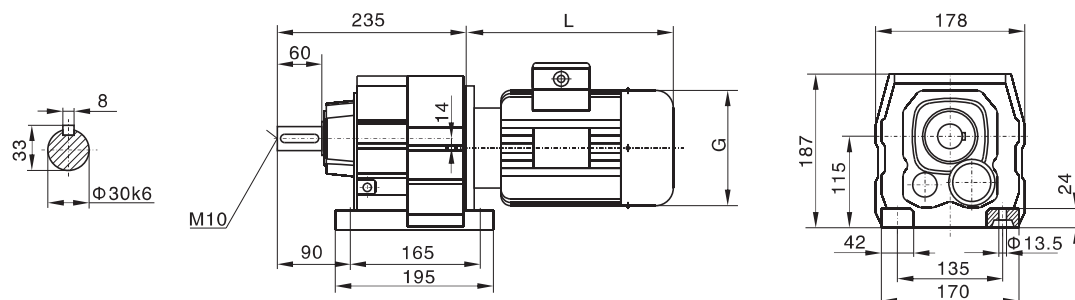




RF47

(Φ140)

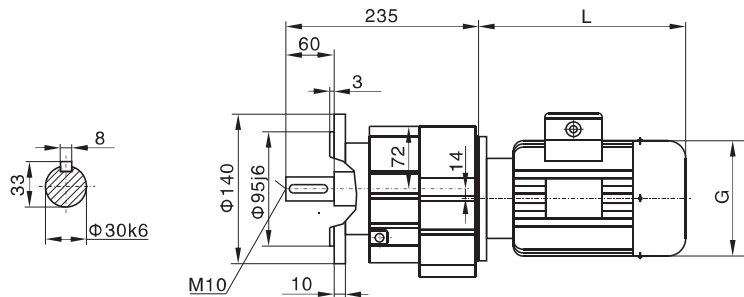




RF47

(Φ160)

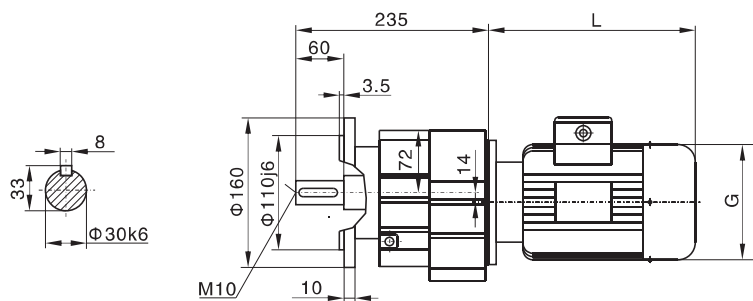


RF47

(Φ200)

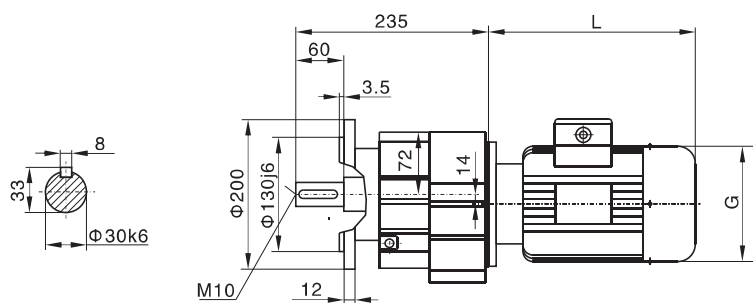


电机需方配或配特殊电机
时需加联接法兰


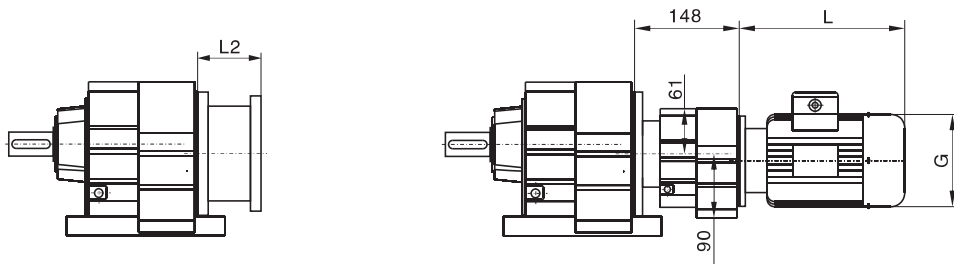


上海承禹机电设备有限公司

R..S47


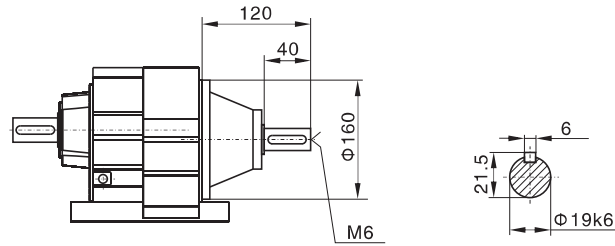


R57

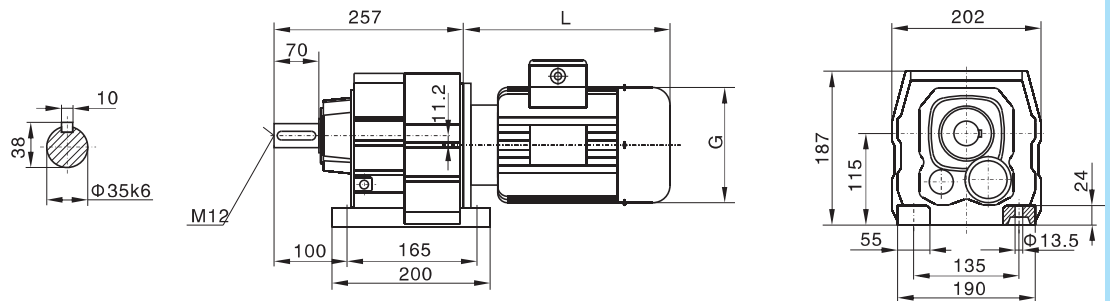



RF57

($\Phi 160$)

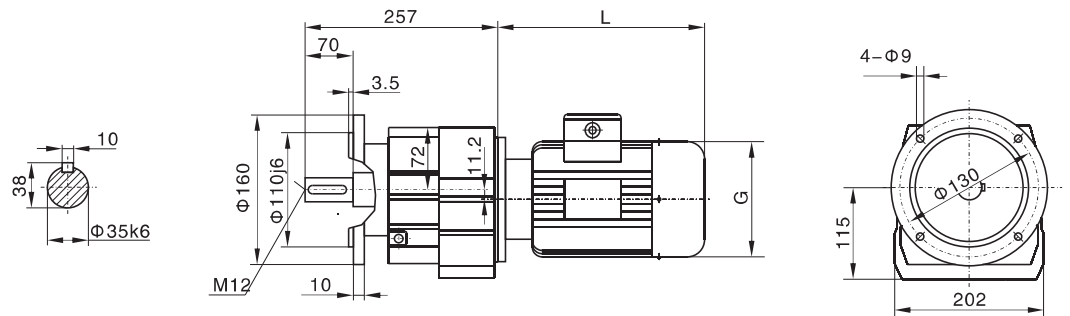



RF57

($\Phi 200$)

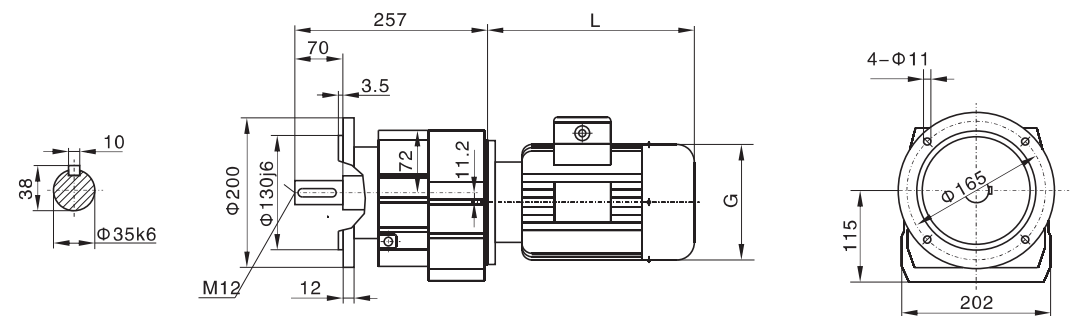


RF57

(Φ250)

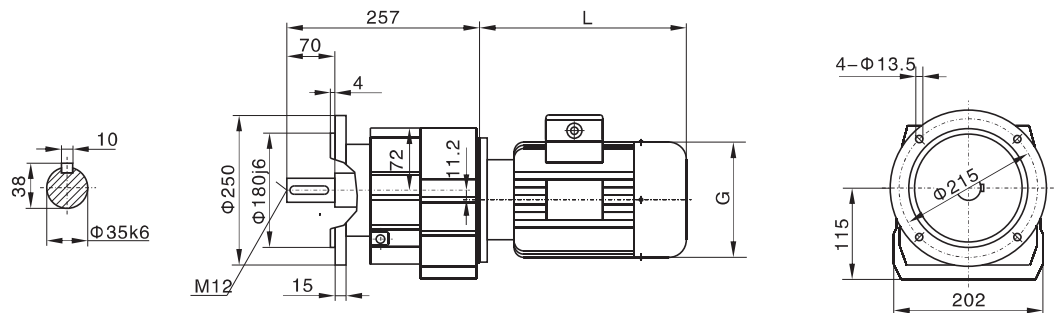


R..57 R37



电机需方配或配特殊电机
时需加联接法兰

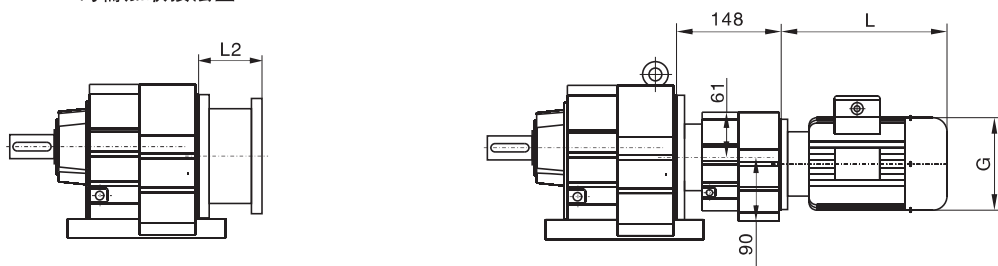

R..S57

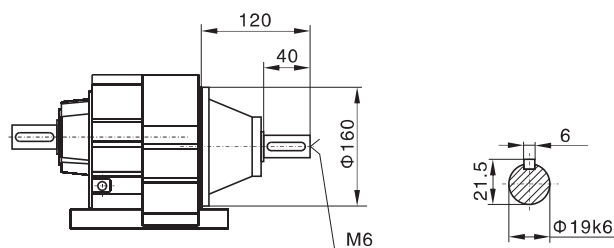



R67

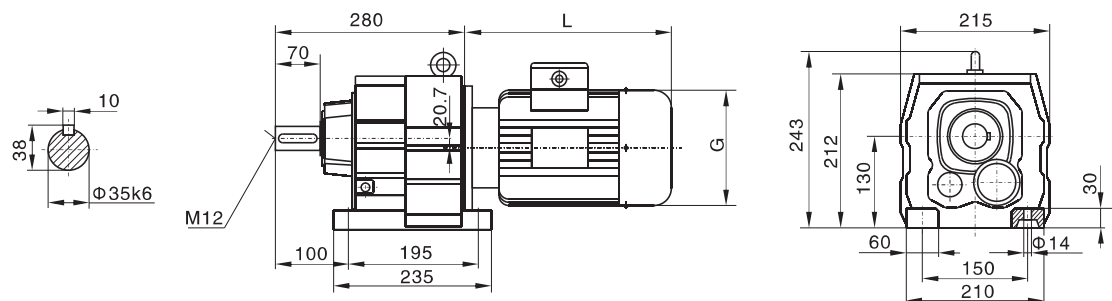

上海承禹机电设备有限公司



RF67

(Φ200)

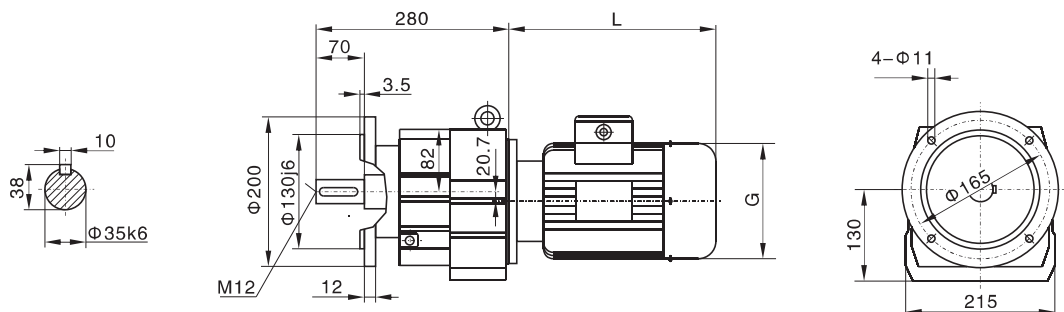


RF67


(Φ250)

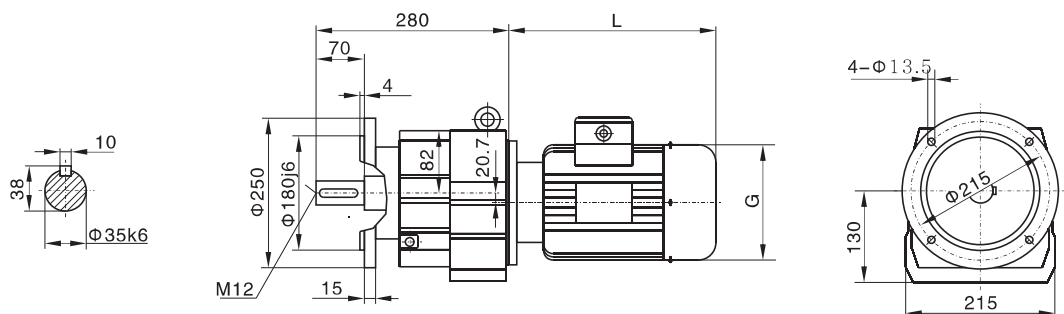


R..67 R37

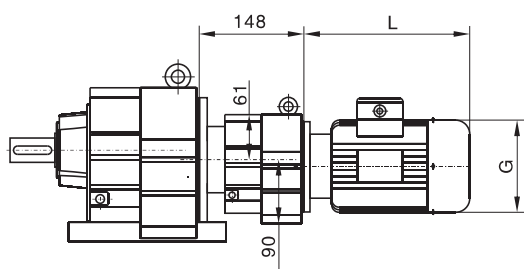



电机需方配或配特殊电机
时需加联接法兰



R..S67


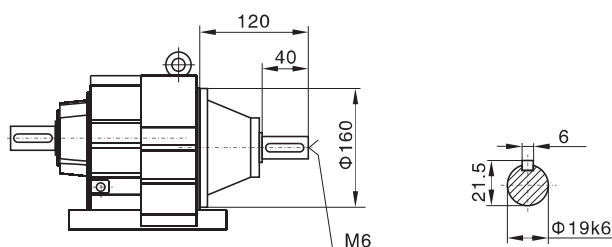


R77

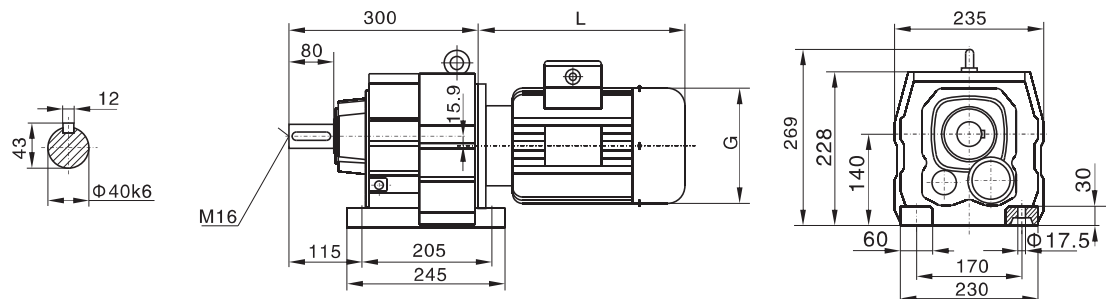



RF77

($\Phi 250$)

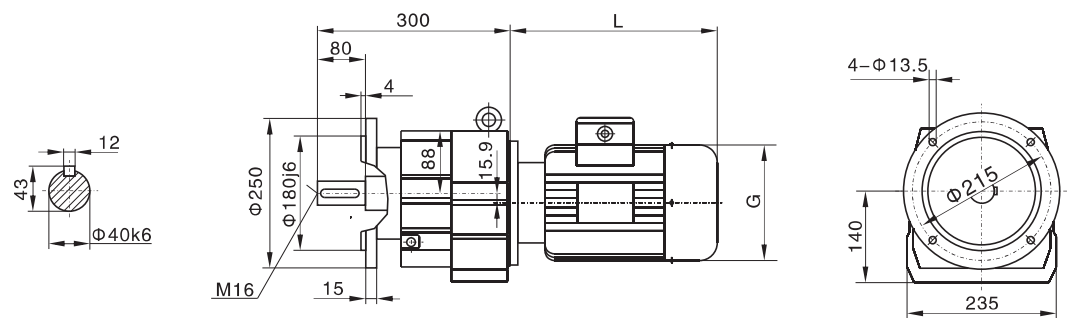


RF77

($\Phi 300$)

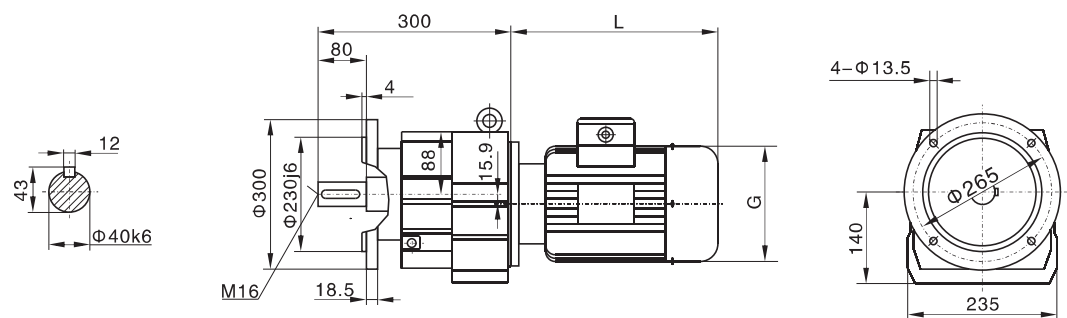


R..77 R37




电机需方配或配特殊电机
时需加联接法兰

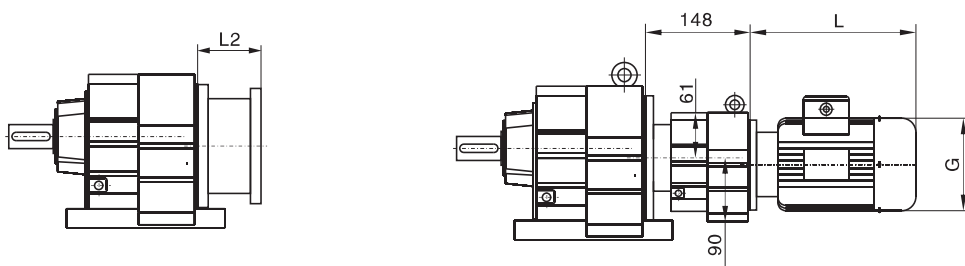

R..S77



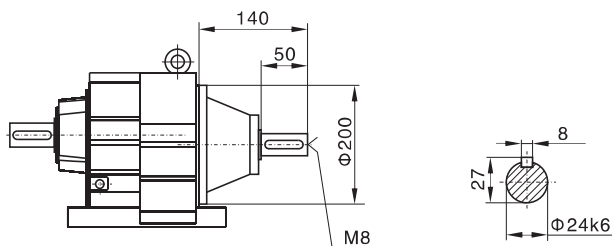


R87

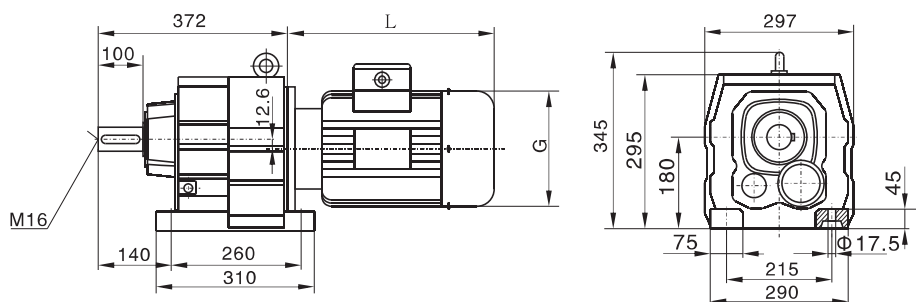




RF87

($\Phi 300$)

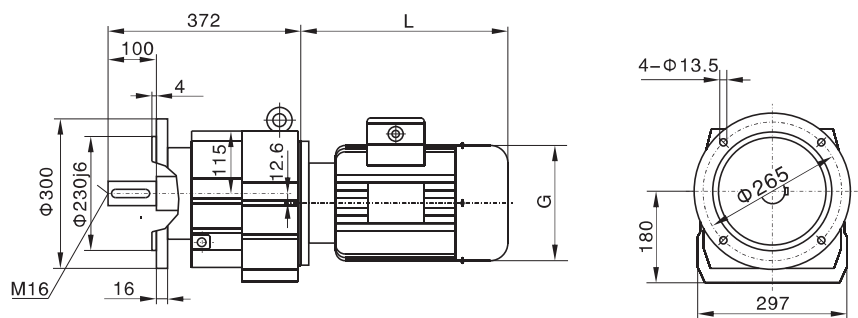


RF87

($\Phi 350$)

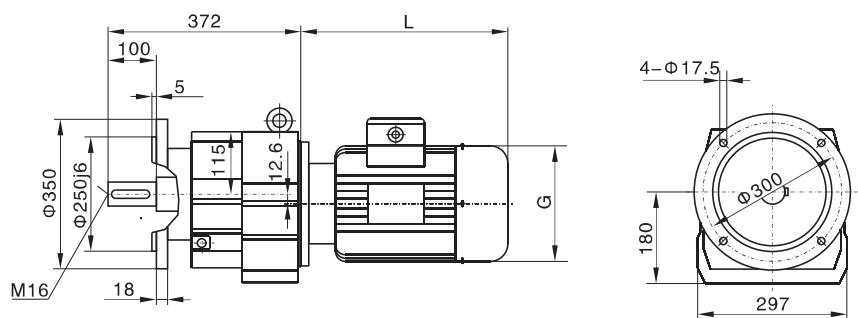


R..87 R57



电机需方配或配特殊电机
时需加联接法兰

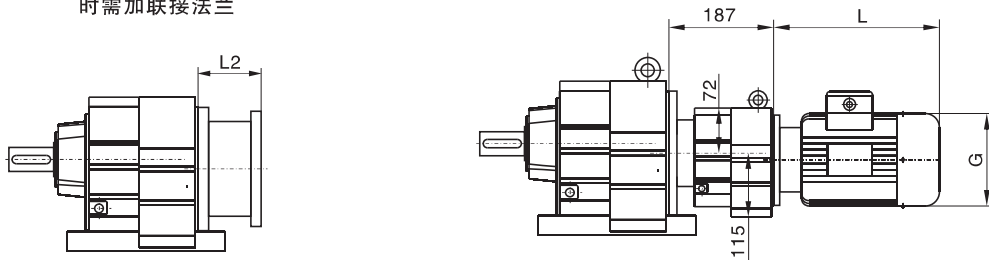

R..S87


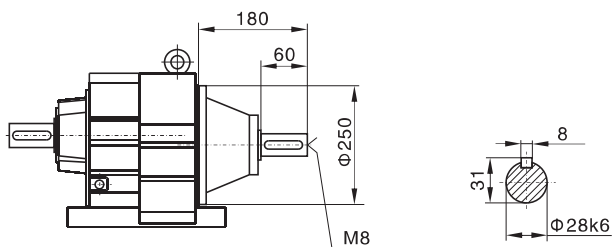


R97

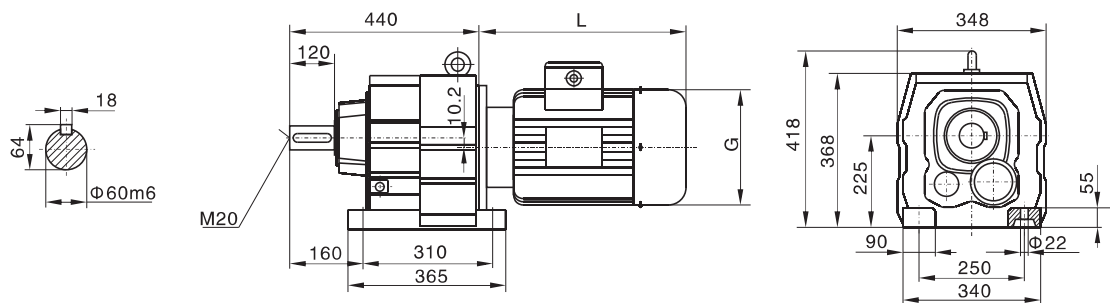

RF97





(Φ350)

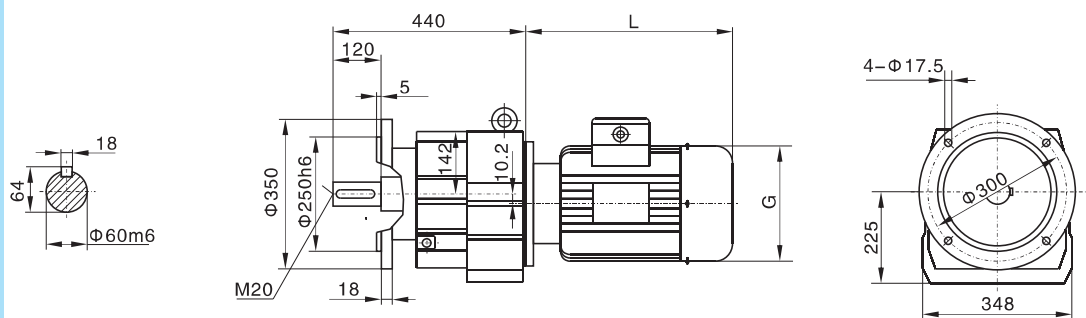


上海承禹机电设备有限公司

RF97


(Φ450)

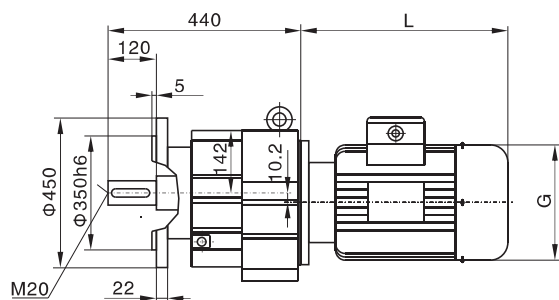



R..97 R57

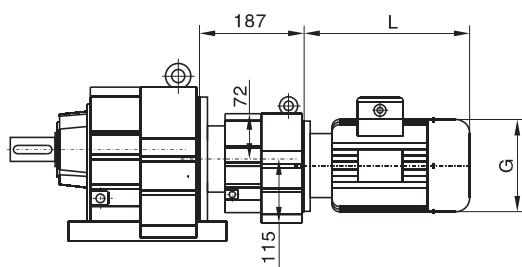





电机需方配或配特殊电机
时需加联接法兰



R..S97



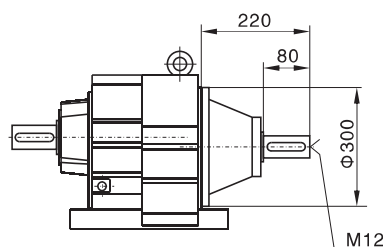


R107

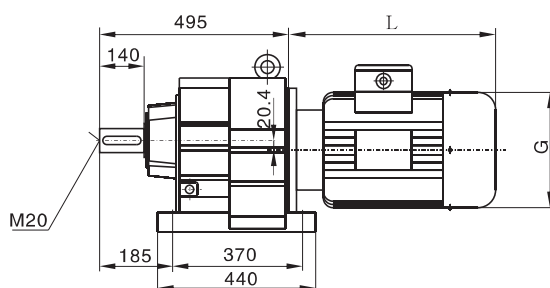




RF107

(Φ350)

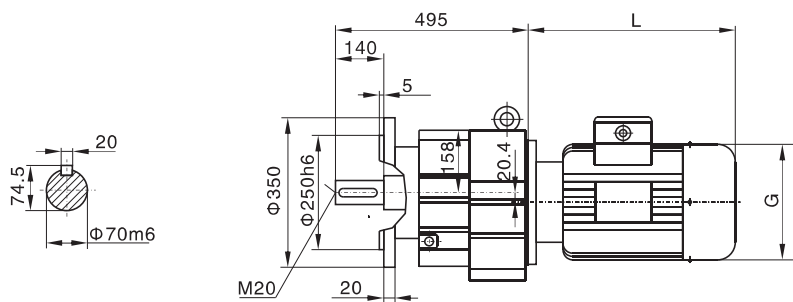


RF107

(Φ450)

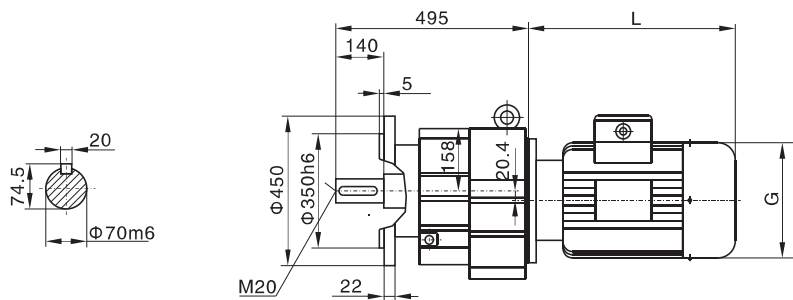


R..107 R77



电机需方配或配特殊电机
时需加联接法兰

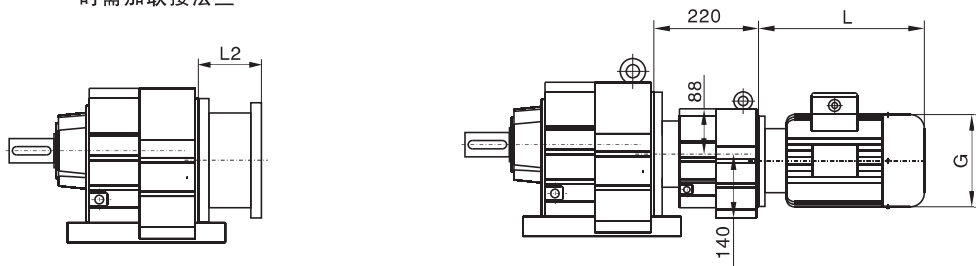

R..S107

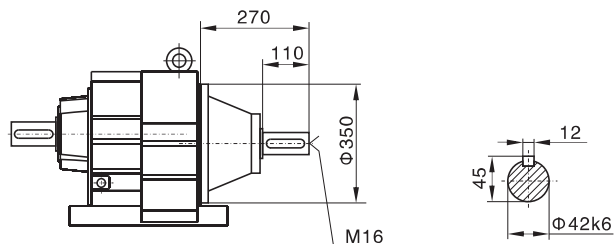


R


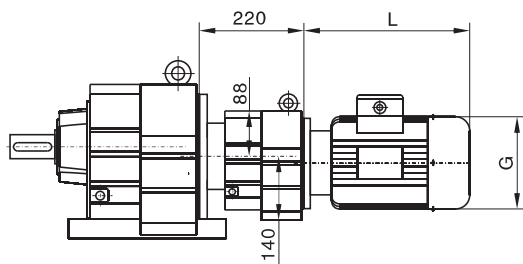


53

R..S137


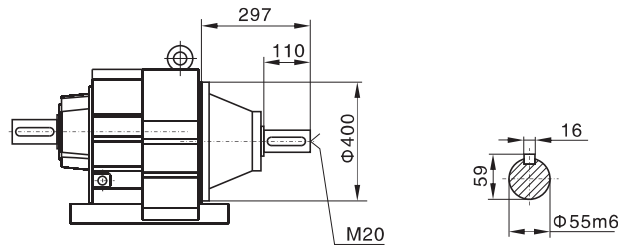


R147

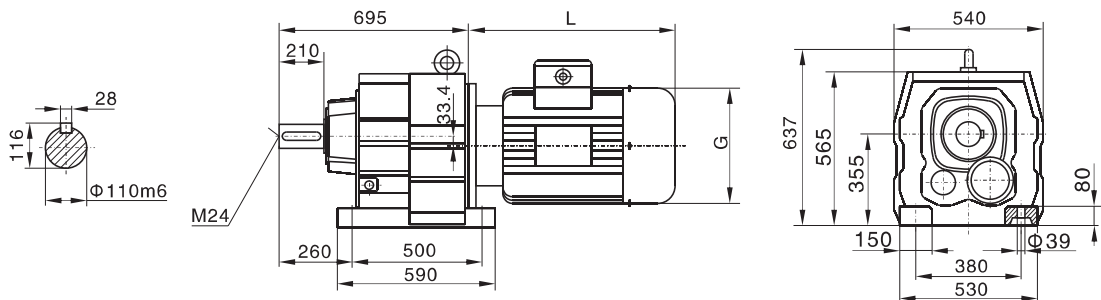



RF147

($\Phi 450$)

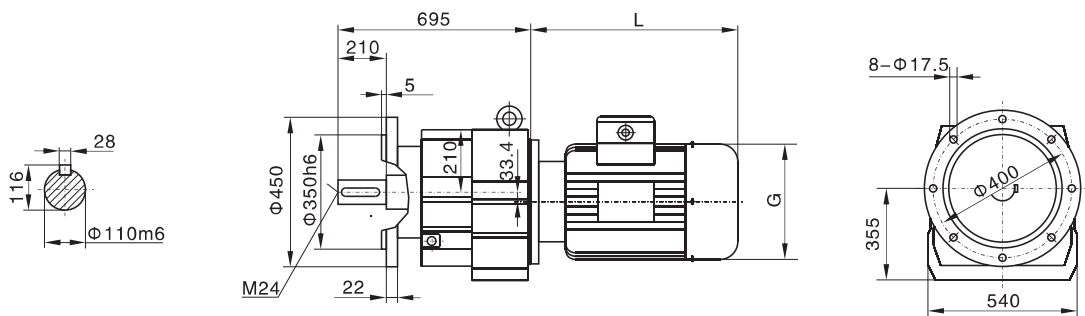


RF147

($\Phi 550$)

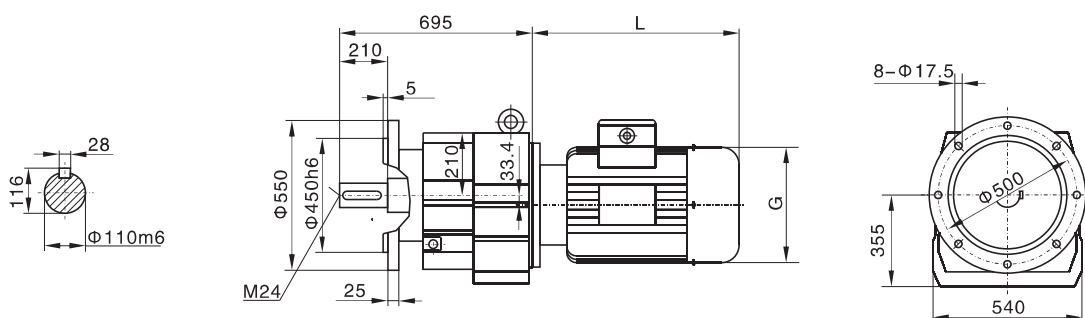


上海承禹机电设备有限公司



R..147 R77(87)

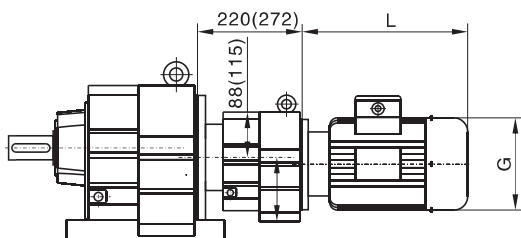





电机需方配或配特殊电机
时需加联接法兰



R..S147




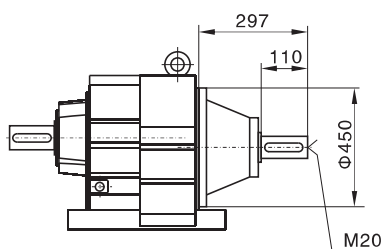


R167

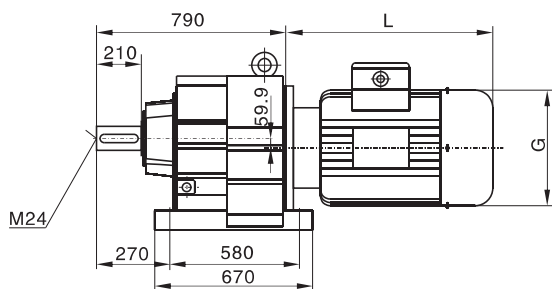



RF167

(Φ550)

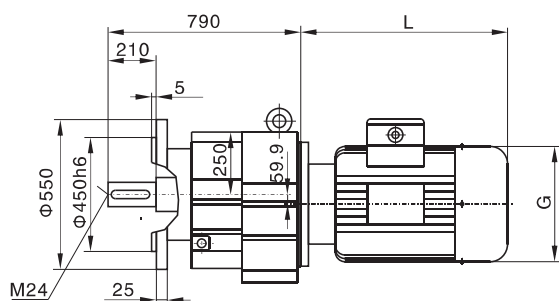



RF167

(Φ660)

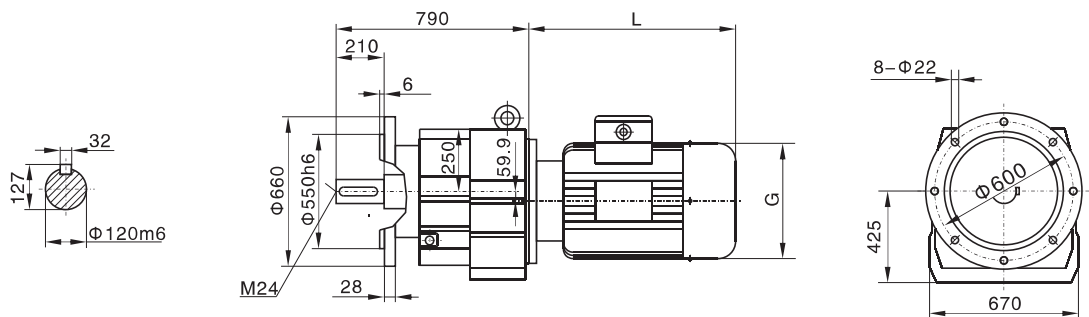


电机需方配或配特殊电机
时需加联接法兰

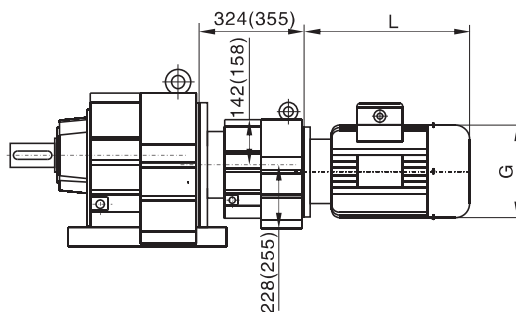



R..167 R97(107)



R..S167

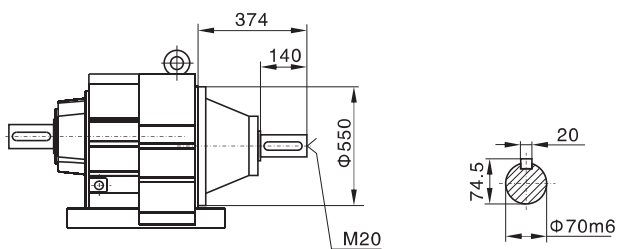


R51

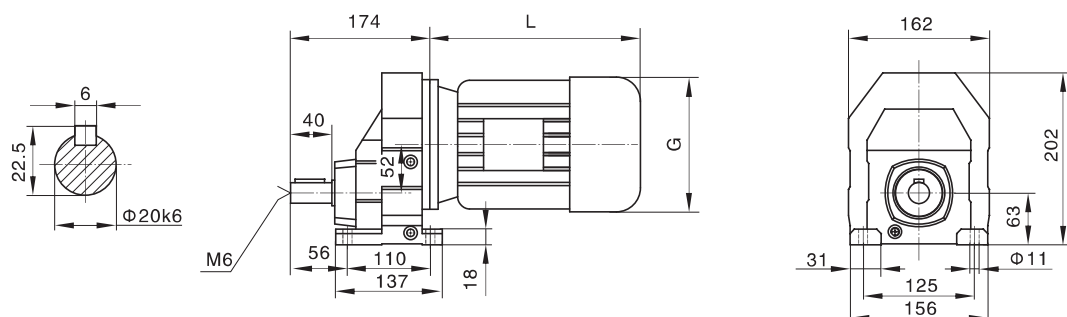


RF51

($\Phi 140$)

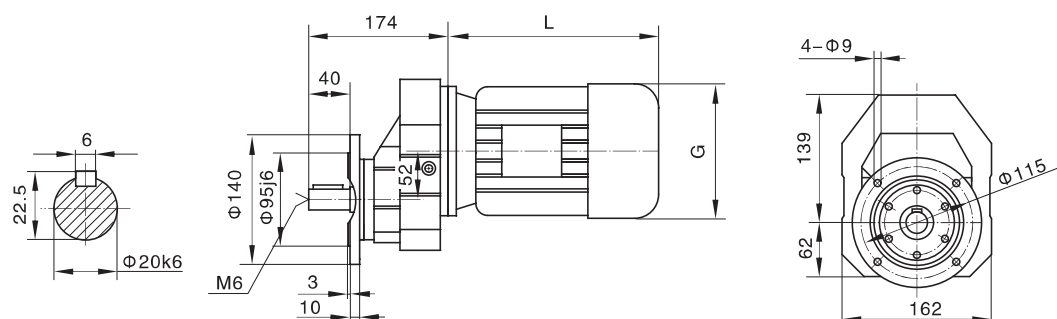


RF51

($\Phi 160$)

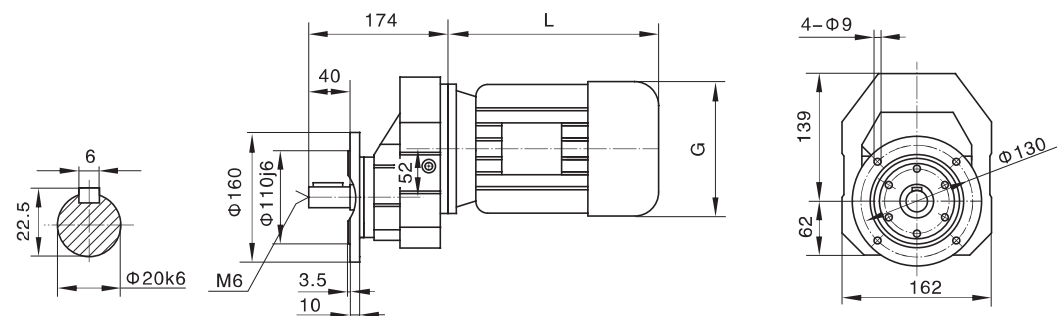


RF51

($\Phi 200$)

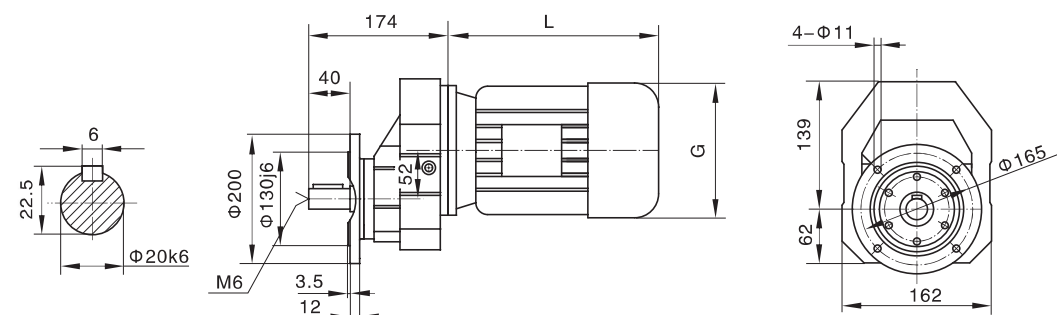



电机需方配或配特殊电机
时需加联接法兰

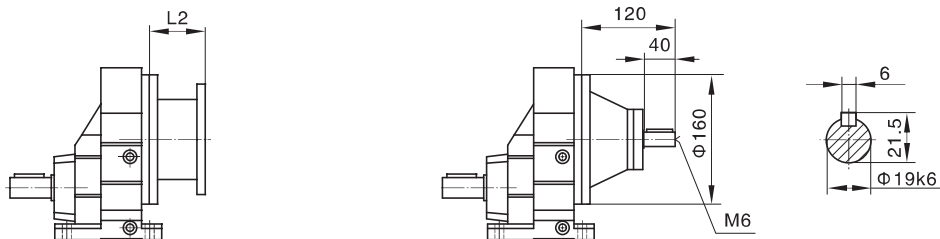

R..S51





R61

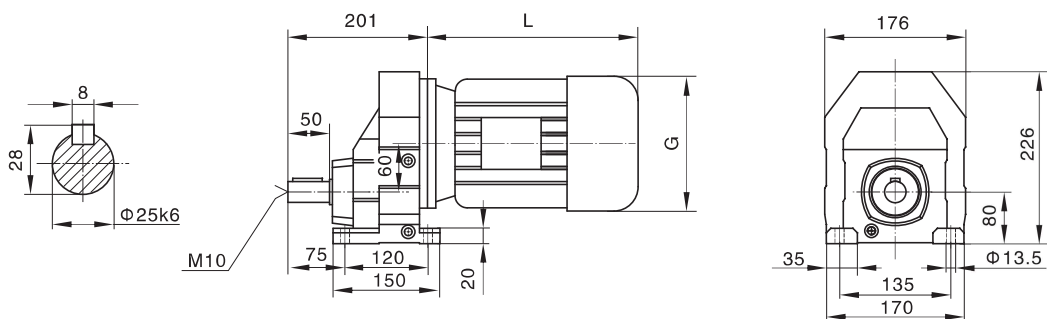



RF61

(Φ160)

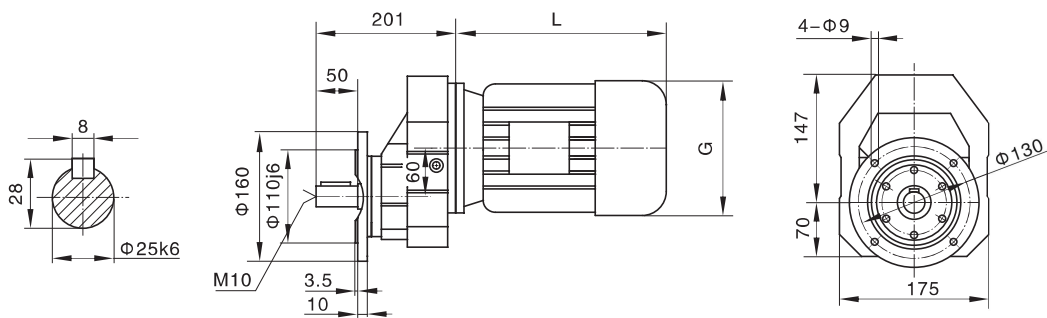

RF61


(Φ200)

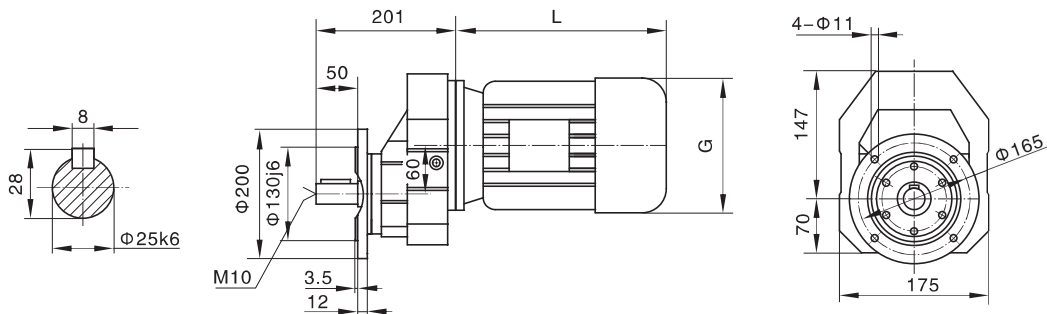



上海承禹机电设备有限公司

RF61

(Φ250)


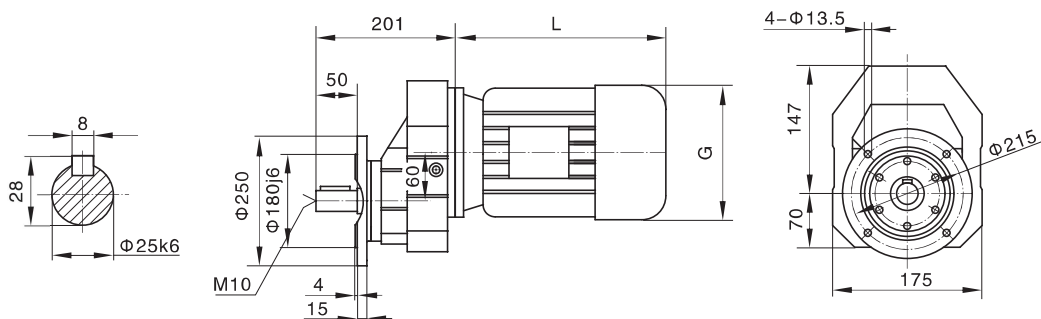


R..S61

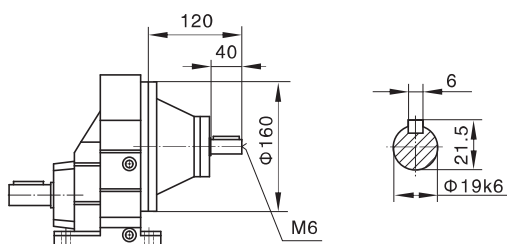


电机需方配或配特殊电机
时需加联接法兰

R71

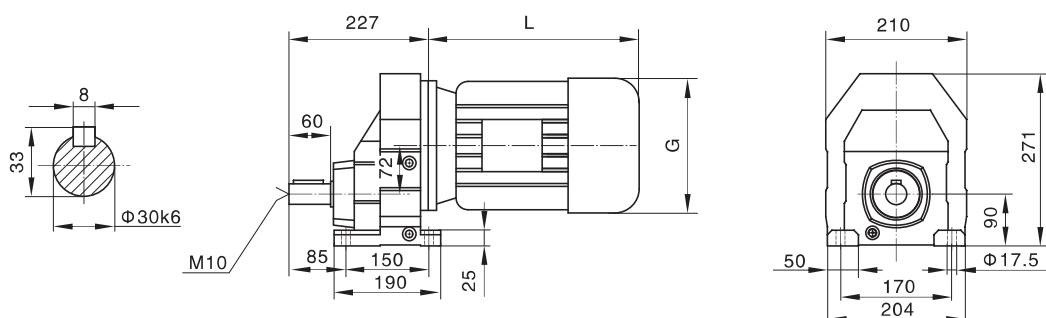



RF71

(Φ200)

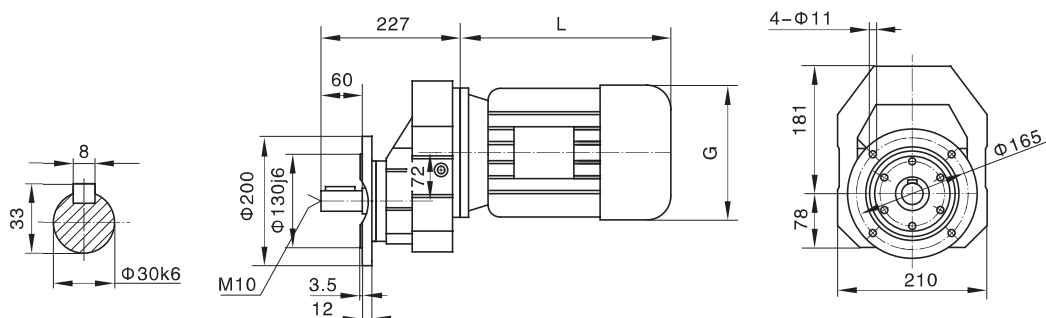


RF71

(Φ250)


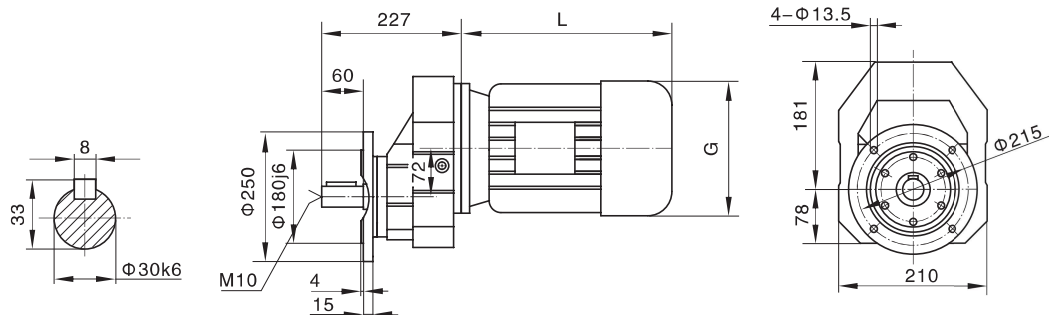


R..S71

电机需方配或配特殊电机
时需加联接法兰


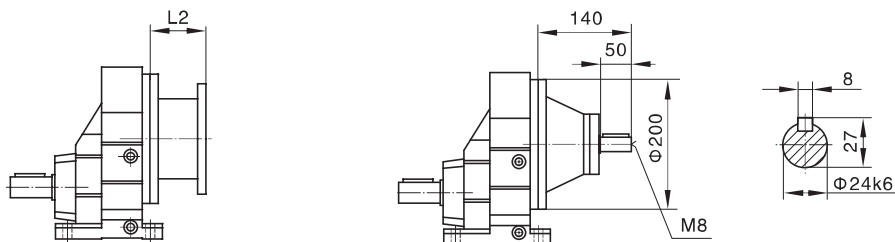


R81

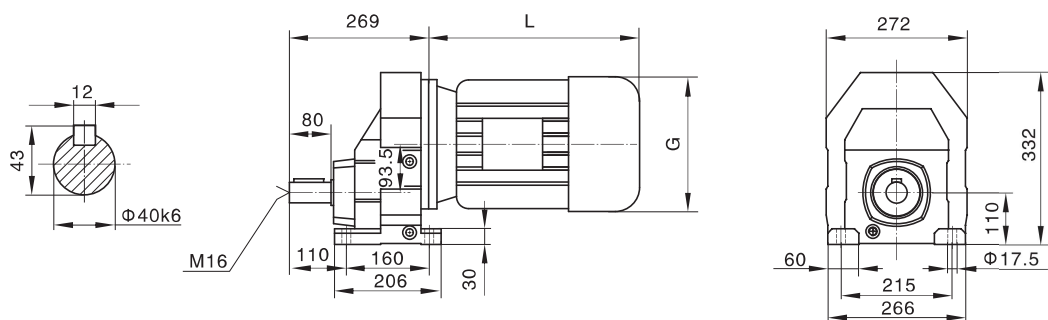

RF81



(Φ250)

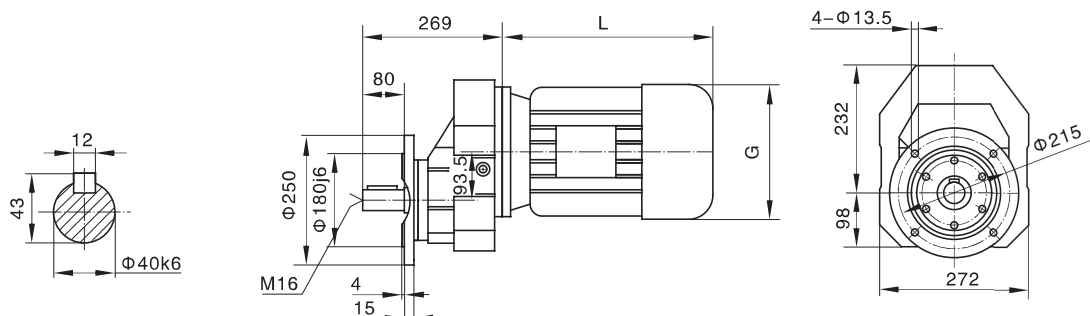

上海承禹机电设备有限公司


RF81

(Φ300)

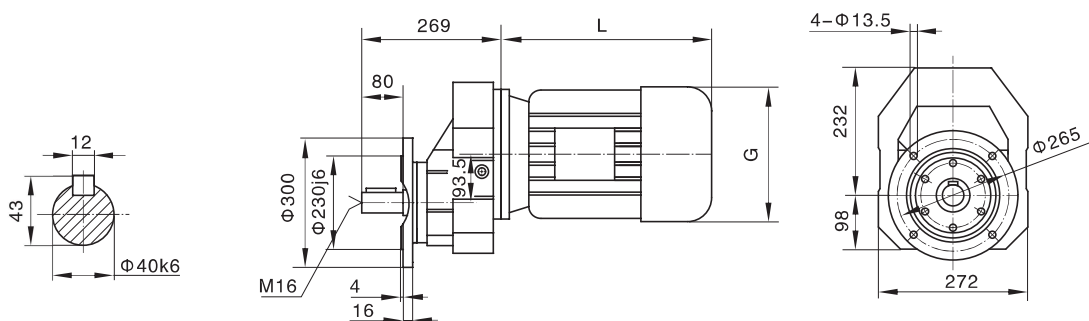



R..S81

电机需方配或配特殊电机
时需加联接法兰


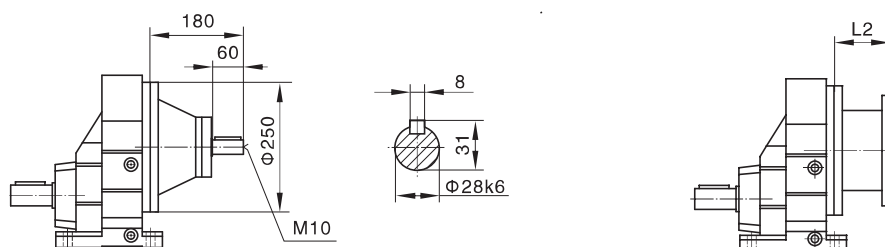


R91

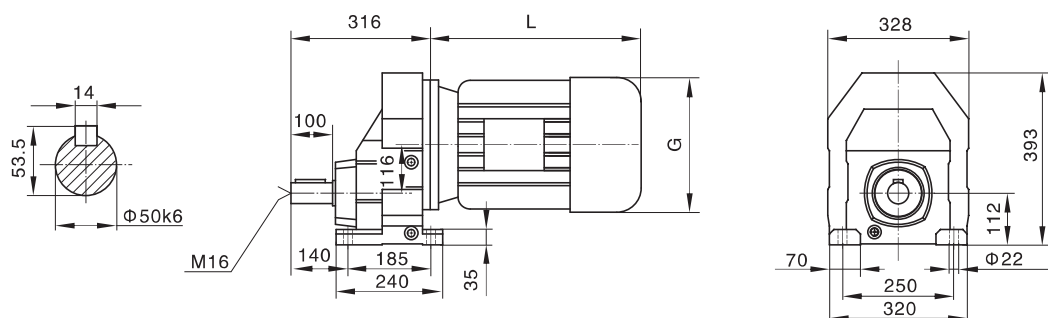



RF91

(Φ300)

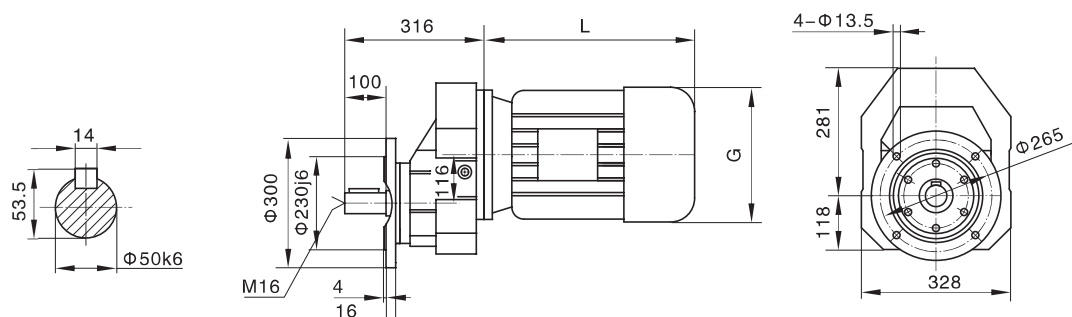


RF91

(Φ350)


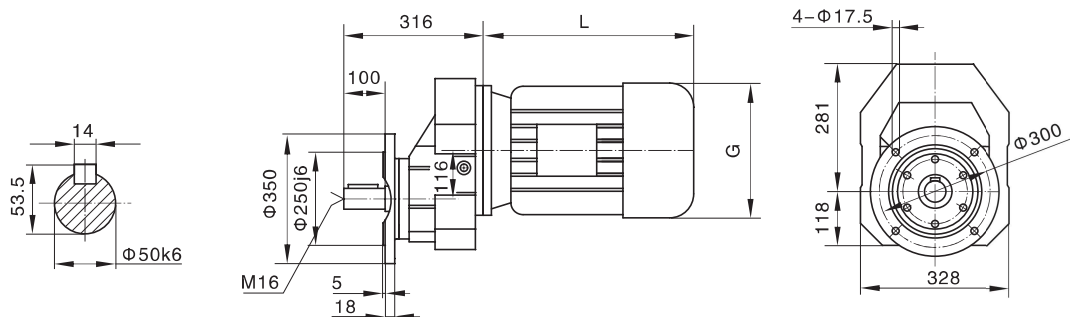


R..S91

电机需方配或配特殊电机
时需加联接法兰


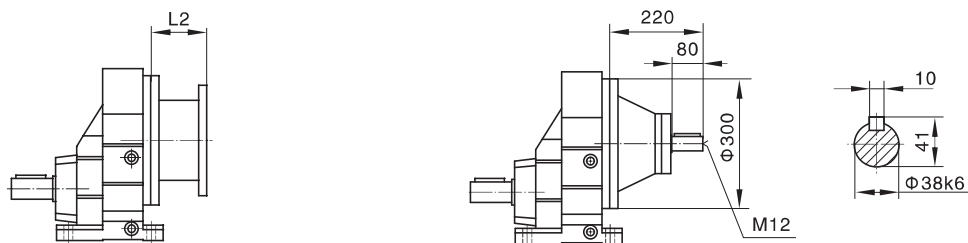


R101

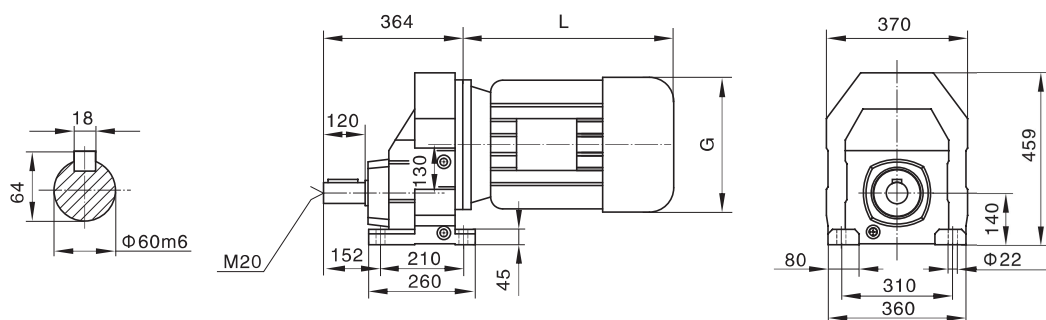



RF101

(Φ350)

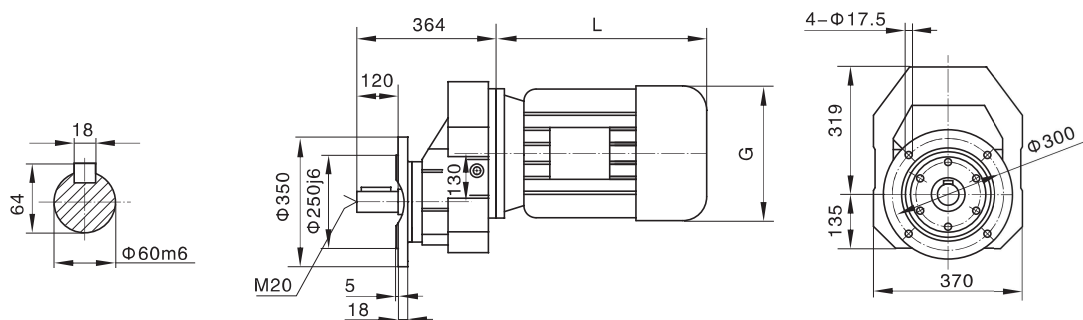

RF101

(Φ450)

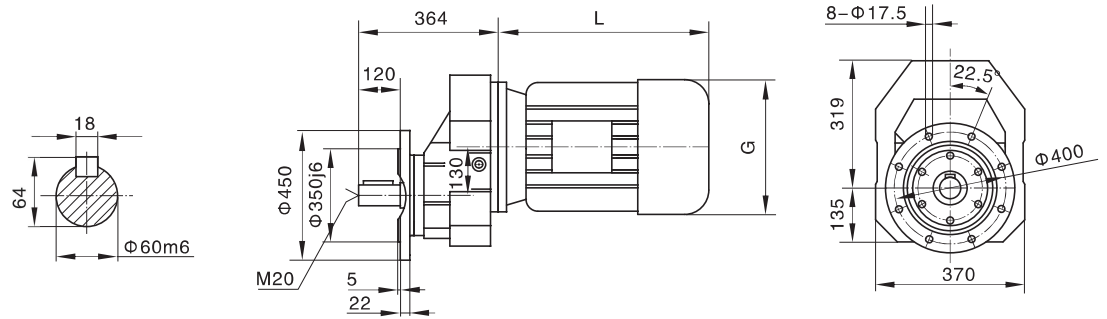

R..S101

电机需方配或配特殊电机
时需加联接法兰

